



CAPSTONE MINING CORP.

Suite 900 - 999 West Hastings Street
Vancouver, BC V6C 2W2

ANNUAL INFORMATION FORM

For the year ended December 31, 2011

Dated as of March 30, 2012

TABLE OF CONTENTS

ITEM 1 - GLOSSARY OF TECHNICAL TERMS	iv
ITEM 2 - CORPORATE STRUCTURE	9
2.1 NAME, ADDRESS AND INCORPORATION	9
2.2 INTERCORPORATE RELATIONSHIPS	10
ITEM 3 - GENERAL DEVELOPMENT OF THE BUSINESS	10
3.1 THREE YEAR HISTORY	11
ITEM 4 - DESCRIPTION OF THE BUSINESS	13
4.1 GENERAL	13
4.2 MATERIAL MINERAL PROPERTIES	16
A. COZAMIN MINE (MEXICO)	17
B. MINTO MINE (YUKON TERRITORY)	28
C. SANTO DOMINGO PROJECT (CHILE)	41
D. KUTCHO PROJECT (BRITISH COLUMBIA)	52
ITEM 5 - RISK FACTORS	62
ITEM 6 - DIVIDENDS AND DISTRIBUTIONS	71
ITEM 7 - DESCRIPTION OF CAPITAL STRUCTURE	72
7.1 GENERAL DESCRIPTION OF CAPITAL STRUCTURE	72
ITEM 8 - MARKET FOR SECURITIES	72
8.1 COMMON SHARES - TRADING PRICE AND VOLUME	72
8.2 DEBENTURES - TRADING PRICE AND VOLUME	73
ITEM 9 - PRIOR SALES	73
ITEM 10 - DIRECTORS AND OFFICERS	74
10.1 NAME, OCCUPATION AND SECURITY HOLDING	74
10.2 CEASE TRADE ORDERS, BANKRUPTCIES, PENALTIES OR SANCTIONS	76
10.3 CONFLICTS OF INTEREST	77
ITEM 11 - AUDIT COMMITTEE INFORMATION	77
11.1 AUDIT COMMITTEE CHARTER	77
11.2 COMPOSITION OF THE AUDIT COMMITTEE	77
11.3 RELEVANT EDUCATION AND EXPERIENCE	78
11.2 RELIANCE ON CERTAIN EXEMPTIONS	78
11.3 PRE-APPROVAL POLICIES AND PROCEDURES	79
11.4 EXTERNAL AUDITORS SERVICE FEES (BY CATEGORY)	79
ITEM 12 - LEGAL PROCEEDINGS AND REGULATORY ACTIONS	79
ITEM 13 - INTEREST OF MANAGEMENT AND OTHERS IN MATERIAL TRANSACTIONS	79
ITEM 14 - TRANSFER AGENT AND REGISTRAR	80
ITEM 15 - MATERIAL CONTRACTS	80
ITEM 16 - EXPERTS	80
16.1 NAMES OF EXPERTS	80
16.2 INTERESTS OF EXPERTS	80
ITEM 17 - ADDITIONAL INFORMATION	81

Date of Information

In this Annual Information Form, unless the context otherwise requires, the “Company” or “Capstone” refers to Capstone Mining Corp. and its subsidiaries. All information contained herein is as of March 30, 2012, unless otherwise stated.

Financial Statements

This Annual Information Form should be read in conjunction with the Company’s consolidated financial statements and management’s discussion and analysis for the year ended December 31, 2011. The financial statements and management’s discussion and analysis are available under the Company’s profile on the SEDAR website at www.sedar.com.

Cautionary Statement Regarding Forward-Looking Information

This Annual Information Form, and the documents incorporated by reference herein, may contain “forward-looking information” within the meaning of Canadian securities legislation and “forward-looking statements” within the meaning of the United States Private Securities Litigation Reform Act of 1995 (collectively, “forward-looking statements”). These forward-looking statements are made as of the date of this document and Capstone does not intend, and does not assume any obligation, to update these forward-looking statements, except as required under applicable securities legislation.

Forward-looking statements relate to future events or future performance and reflect our expectations or beliefs regarding future events. Forward-looking statements include, but are not limited to, statements with respect to the estimation of mineral resources and mineral reserves, the realization of mineral reserve estimates, the timing and amount of estimated future production, costs of production and capital expenditures, the success of our mining operations, environmental risks, unanticipated reclamation expenses and title disputes. In certain cases, forward-looking statements can be identified by the use of words such as “plans”, “expects”, “budget”, “scheduled”, “estimates”, “forecasts”, “intends”, “anticipates”, “believes” or variations of such words and phrases, or statements that certain actions, events or results “may”, “could”, “would”, “might” or “will be taken”, “occur” or “be achieved” or the negative of these terms or comparable terminology. By their very nature, forward-looking statements involve known and unknown risks, uncertainties and other factors that may cause our actual results, performance or achievements to be materially different from any future results, performance or achievements expressed or implied by the forward-looking statements. Such factors include, among others, risks related to:

- inherent hazards associated with mining operations;
- future prices of copper and other metals;
- counterparty risks associated with sales of our metals;
- our ability to raise capital;
- foreign currency exchange rate fluctuations;
- accuracy of mineral resource and mineral reserve estimates;
- dependence on key management personnel;
- changes in general economic conditions;
- uncertainties and risks related to the start-up of operations at the Santo Domingo Project and the Kutcho Project;
- increased operating and capital costs;
- challenges to title to our mineral properties;
- operating in foreign jurisdictions with different economic, cultural and political environments;
- compliance with governmental regulations;
- compliance with environmental laws and regulations;
- reliance on approvals, licenses and permits from governmental authorities;
- impact of climatic conditions on our Minto Mine operations;
- potential conflicts of interest involving our directors and officers;
- aboriginal title claims and rights to consultation and accommodation;

- limitations inherent in our insurance coverage;
- land reclamation and mine closure obligations;
- labour relations;
- increasing energy prices;
- competition in the mining industry;
- risks associated with joint venture partners;
- our ability to integrate new acquisitions into our operations; and
- our ability to realize the benefits of the acquisition of Far West Mining Ltd.

For a more detailed discussion of these factors and other risks, see “Risk Factors” beginning on page [•].

Although we have attempted to identify important factors that could cause our actual results, performance or achievements to differ materially from those described in our forward-looking statements, there may be other factors that cause our results, performance or achievements not to be as anticipated, estimated or intended. There can be no assurance that our forward-looking statements will prove to be accurate, as our actual results, performance or achievements could differ materially from those anticipated in such statements. Accordingly, readers should not place undue reliance on our forward-looking statements.

Currency

The Company reports its financial results and prepares its financial statements in United States dollars. All currency amounts in this Annual Information Form are expressed in United States dollars, unless otherwise indicated. References to “C\$” are to Canadian dollars and references to “MX\$” are to Mexican pesos.

The United States dollar exchange rates for the Company’s principal operating currencies are as follows:

As at December 31			
Canadian dollar (C\$)	2011	2010	2009
Average	1.0117	1.0303	1.1420
High	1.0583	1.0745	1.2991
Low	0.9430	0.9946	1.0259
Mexican peso (MX\$)	2011	2010	2009
Average	12.5587	12.6293	13.5014
High	13.7212	13.3851	15.3665
Low	11.8850	12.1304	12.5969

Conversion Table

In this Annual Information Form, metric units are used with respect to the Company’s mineral properties, unless otherwise indicated. Conversion rates from imperial measures to metric units and from metric units to imperial measures are provided in the table set out below.

Imperial Measure	=	Metric Unit	=	Imperial Measure
2.47 acres		1 hectare		0.4047 hectares
3.28 feet		1 metre		0.3048 metres
0.62 miles		1 kilometre		1.609 kilometres
0.032 ounces (troy)		1 gram		31.1 grams
1.102 tons (short)		1 tonne		0.907 tonnes
0.029 ounces (troy)/ton		1 gram/tonne		34.28 grams/tonne
				1 acre
				1 foot
				1 mile
				1 ounce (troy)
				1 ton
				1 ounce (troy)/ton

Compliance with NI 43-101

As required by National Instrument 43-101 - *Standards of Disclosure for Mineral Projects* ("NI 43-101"), Capstone has filed technical reports detailing the technical information related to its material mineral properties discussed herein. For the purposes of NI 43-101, the Company's material mineral properties are the Cozamin Mine, the Minto Mine and the Santo Domingo Project. Unless otherwise indicated, Capstone has prepared the technical information in this Annual Information Form ("Technical Information") based on information contained in the technical reports, news releases and other public filings (collectively, the "Disclosure Documents") available under the Company's profile on SEDAR at www.sedar.com. Each Disclosure Document was prepared by or under the supervision of a qualified person as defined in NI 43-101. For readers to fully understand the information in this Annual Information Form, they should read the Disclosure Documents in their entirety, including all qualifications, assumptions and exclusions that relate to the information set out in this Annual Information Form which qualifies the Technical Information. The Disclosure Documents are each intended to be read as a whole, and sections should not be read or relied upon out of context. The Technical Information is subject to the assumptions and qualifications contained in the Disclosure Documents.

Classification of Mineral Reserves and Mineral Resources

In this Annual Information Form and as required by NI 43-101, the definitions of proven and probable mineral reserves and measured, indicated and inferred mineral resources are those used by Canadian Provincial securities regulatory authorities and conform to the definitions utilized by the Canadian Institute of Mining, Metallurgy and Petroleum ("CIM") in the "CIM Standards on Mineral Resources and Reserves - Definitions and Guidelines" adopted on August 20, 2000 and amended December 11, 2005 ("CIM Standards").

Cautionary Note to US Investors Concerning Estimates of Mineral Reserves and Mineral Resources

The disclosure in this Annual Information Form uses mineral resource and mineral reserve classification terms that comply with reporting standards in Canada, and, unless otherwise indicated, all mineral resource and mineral reserve estimates included in this Annual Information Form have been prepared in accordance with NI 43-101. NI 43-101 is a rule developed by the Canadian Securities Administrators that establishes standards for all public disclosure an issuer makes of scientific and technical information concerning mineral projects. These standards differ significantly from the disclosure requirements of the SEC set forth in Industry Guide 7. Consequently, mineral resource and mineral reserve information contained in this Annual Information Form is not comparable to similar information that would generally be disclosed by US companies in accordance with the rules of the SEC.

In particular, the SEC's Industry Guide 7 applies different standards in order to classify mineralization as a reserve. As a result, the definitions of proven and probable reserves used in NI 43-101 differ from the definitions in Industry Guide 7. Under SEC standards, mineralization may not be classified as a "reserve" unless the determination has been made that the mineralization could be economically and legally produced or extracted at the time the reserve determination is made. Accordingly, mineral reserve estimates contained in this Annual Information Form may not qualify as "reserves" under SEC standards.

In addition, this Annual Information Form uses the terms "measured mineral resources", "indicated mineral resources" and "inferred mineral resources" to comply with the reporting standards in Canada. The SEC's Industry Guide 7 does not recognize mineral resources and US companies are generally not permitted to disclose resources in documents they file with the SEC. Investors are cautioned not to assume that any part or all of the mineral deposits in these categories will ever be converted into SEC defined mineral "reserves." Further, "inferred mineral resources" have a great amount of uncertainty as to their existence and as to whether they can be mined legally or economically. Therefore, investors are also cautioned not to assume that all or any part of an inferred mineral resource exists. In accordance with Canadian rules, estimates of "inferred mineral resources" cannot form the basis of feasibility or other economic studies, except in rare cases. In addition, disclosure of "contained ounces" in a mineral resource estimate is permitted disclosure under NI 43-101 provided that the grade or quality and the quantity of each category is stated; however, the SEC normally only permits issuers to report mineralization that does not constitute "reserves" by SEC standards as in place tonnage and grade without reference to unit measures. For the above reasons, information contained in this Annual Information Form containing descriptions of our mineral resource and

mineral reserve estimates is not comparable to similar information made public by US companies subject to the reporting and disclosure requirements of the SEC.

The mineral resource and mineral reserve estimates included in this Annual Information Form are prepared in accordance with the “CIM Definition Standards On Mineral Resources and Mineral Reserves”, adopted by the CIM Council of the Canadian Institute of Mining, Metallurgy and Petroleum on November 14, 2004, and the CIM Estimation of Mineral Resources and Mineral Reserves Best Practice Guidelines, adopted by the CIM Council on November 23, 2003, using geostatistical and/or classical methods, plus economic and mining parameters appropriate to each operation. Definitions and guidelines can be found at www.cim.org. Mineral resource and mineral reserve estimates for each of the Company’s projects are prepared by or under the supervision of a qualified person (as defined in NI 43-101).

ITEM 1 - GLOSSARY OF TECHNICAL TERMS

In this Annual Information Form, the following technical terms have the following meanings:

AAS	means atomic absorption spectroscopy.
Ag	means silver.
alteration	means chemical and mineralogical changes in a rock mass resulting from the passage of fluids.
anomaly	means a deviation from uniformity. In the search for minerals, it is an area in which higher or lower than background concentrations of minerals may be found.
assay	means an analysis of the contents of metals in mineralized rocks.
Au	means gold.
biotite	means a magnesium-iron mica widely distributed in igneous rocks.
breccia	means a fragmental rock whose components are angular and not water-worn.
chlorite	means in geology, the general term for hydrated silicates of aluminum, iron and magnesium.
CIM	means Canadian Institute of Mining, Metallurgy and Petroleum and the CIM Standards on Mineral Resources and Reserves - Definitions and Guidelines” adopted on August 20, 2000 and amended December 11, 2005.
Cu	means copper.
deposit	means a mineralized body which has been physically delineated by drilling, trenching and/or underground work and may contain a sufficient average grade of metal or metals to warrant further exploration and/or development expenditures. Such a deposit does not qualify as a commercially mineable reserve until final technical, legal and economic factors have been resolved.
diamond drill holes	means holes drilled by a method whereby rock is drilled with a diamond impregnated, hollow drilling bit which produces a continuous, in situ record of the rock mass intersected in the form of solid cylinders of rock which are referred to as core.
disseminated	means a texture in which minerals occur as scattered particles in the rock.
dmt	means dry metric tonnes.
dmtu	means dry metric tonne unit.
dyke	means a tabular body of igneous rock that cuts across the layering or fabric of the host rock.
fabric	means the spatial arrangement and orientation of rock components, whether crystals or sedimentary particles, as determined by their sizes, shapes, etc.
fault	means a fracture in a rock across which there has been displacement.
Fe	means iron.
feldspar	means one of a group of rock forming minerals which include microcline, orthoclase, plagioclase and anorthoclase.
foliation	means the preferred planar orientation of minerals and mineral aggregates in metamorphic rocks.
g	means gram.

grade	means the amount of valuable mineral in each tonne of ore, expressed as ounces per ton or grams per tonne for precious metal and as a percentage by weight for other metals.
g/t	means grams per metric tonne.
ha	means hectares.
host rock	means a volume of rock within which mineralization or an ore body occurs.
HQ	means approximately 63mm diameter drill core.
hydrothermal	means applied to metamorphic and magmatic emanations high in water content; the processes in which they are concerned; and the rocks or ore deposits, alteration products, and springs produced by them.
igneous	means a type of rock that is crystallized from a liquid magma.
Indicated Mineral Resources	means, in accordance with CIM definitions, that part of a mineral resource for which quantity, grade or quality, densities, shape and physical characteristics can be estimated with a level of confidence sufficient to allow the appropriate application of technical and economic parameters to support mine planning and evaluation of the economic viability of the deposit. The estimate is based on detailed and reliable exploration and testing information gathered through appropriate techniques from locations such as outcrops, trenches, pits, workings and drill holes that are spaced closely enough for geological and grade continuity to be reasonably assumed.
Inferred Mineral Resources	means, in accordance with CIM definitions, that part of a mineral resource for which quantity and grade or quality can be estimated on the basis of geological evidence and limited sampling and reasonably assumed, but not verified, geological and grade continuity. The estimate is based on limited information and sampling gathered through appropriate techniques from locations such as outcrops, trenches, pits, workings and drill holes.
IOCG	means iron oxide copper gold.
K	means thousands.
Koz	means thousands of ounces.
Kt	means thousands of tonnes.
LOM	means life of mine.
M	means millions.
mafic	means ferromagnesian minerals and rocks where these minerals are abundant.
masl	means metres above sea level
Measured Mineral Resources	means, in accordance with CIM definitions, that part of a mineral resource for which quantity, grade or quality, densities, shape and physical characteristics are so well established that they can be estimated with confidence sufficient to allow the appropriate application of technical and economic parameters to support production planning and evaluation of the economic viability of the deposit. The estimate is based on detailed and reliable exploration, sampling and testing information gathered through appropriate techniques from locations such as outcrops, trenches, pits, workings and drill holes that are spaced closely enough to confirm both geological and grade continuity.

mineral reserve	means, in accordance with CIM definitions, the economically mineable part of a Measured or Indicated Mineral Resource demonstrated by at least a preliminary feasibility study. This study must include adequate information on mining, processing, metallurgical, economic and other relevant factors that demonstrate, at the time of reporting, that economic extraction can be justified. A mineral reserve includes diluting minerals and allowances for losses that may occur when the material is mined.
mineral resource	means, in accordance with CIM definitions, a concentration or occurrence of natural, solid, inorganic or fossilized organic material in or on the earth's crust in such form and quantity and of such a grade or quality that it has reasonable prospects for economic extraction. The location, quantity, grade, geological characteristics and continuity of a mineral resource are known, estimated or interpreted from specific geological evidence and knowledge.
Mineralization	means significant amounts of mineral(s) that is (are) of economic interest which may be established by prospecting, trenching and drilling.
MIbs	means millions of pounds.
MNFWZ	means Mala Noche Footwall Zone, a splay off of the Mala Noche Vein on the footwall side of the main structure.
MNV	means Mala Noche Vein, the main mineralized structure in the Cozamin area.
MS	means magnetic susceptibility.
Mt	means millions of tonnes.
MW	means megawatts.
NI 43-101	means National Instrument 43-101 - Standards of Disclosure for Mineral Projects.
NQ	means approximately 47mm diameter drill core.
NSR	means net smelter return.
ore	means rock that contains one or more minerals or metals, at least one of which has commercial value and which can be recovered at a profit.
outcrop	means an exposure of rock at the earth's surface.
Pb	means lead.
pyrite	means a common iron sulphide mineral commonly found in hydrothermal veins and systems and commonly associated with gold mineralization.
QML	means Quartz Mining License.
qualified person	means, in accordance with NI 43-101, an individual who is an engineer or geoscientist with at least five years experience in mineral exploration, mine development, production activities and project assessment, or any combination thereof, including experience relevant to the subject matter of the project or report and is a member in good standing of an approved self-regulating organization.
quartz	means a common rock forming mineral made up of silicon dioxide.
SAG	Semi-Autogenous grinding.
silica	means silicon dioxide (SiO ₂), which occurs in the crystalline forms as quartz, cristobalite, tridymite, as cryptocrystalline chalcedony, as amorphous opal, and as an essential constituent of the silicate groups of minerals.
tpd	means tonnes per day.
tpy	means tonnes per year.

vein	means a sheet-like body of minerals formed by fracture-filling or replacement of the host rock.
volcanic	means formed by volcanic activity.
WUL	means water use license.
Zn	means zinc.

ITEM 2 - CORPORATE STRUCTURE

2.1 Name, Address and Incorporation

The Company was incorporated pursuant to the *Company Act* (British Columbia) on July 17, 1987 under the name 330338 BC Ltd. The Company changed its name to Fire Star Resources Ltd. on April 21, 1989, and to International Bancorp Ltd. on August 17, 1989, and to IBL Equities Ltd. on March 5, 1991. On January 2, 1996, the Company changed its name to Serena Resources Ltd. and consolidated its share capital on a 5:1 basis. On May 17, 2001, the Company changed its name to Consolidated Serena Resources Ltd. and consolidated its share capital on a 5:1 basis. On March 6, 2003, the Company changed its name to Capstone Gold Corp. On February 8, 2006, the Company changed its name to Capstone Mining Corp. and is now governed by the *Business Corporations Act* (British Columbia). On January 12, 2005, Capstone amended its Notice of Articles to change its authorized capital from 100,000,000 common shares to an unlimited number of common shares and to reduce the threshold percentage of votes required to approve a special resolution from 75% to 66⅔%, amongst other things.

On November 24, 2008, Capstone and Sherwood Copper Corporation (“Sherwood”) completed a court-approved plan of arrangement pursuant to which Capstone’s wholly-owned subsidiary acquired all of the issued and outstanding common shares of Sherwood in exchange for common shares of Capstone, and the subsidiary and Sherwood amalgamated to form a new corporation named “Capstone Mining North Ltd.” On January 1, 2009, Capstone and Capstone Mining North Ltd. were amalgamated to form Capstone Mining Corp.

On June 17, 2011, the Company acquired all of the issued and outstanding common shares of Far West Mining Ltd. (“Far West”) by way of a court-approved plan of arrangement. See “Acquisition of Far West”. Concurrent with the acquisition of Far West, the Company entered into an agreement with Korea Resources Corporation (“KORES”), pursuant to which Capstone sold to KORES a 30% indirect interest in Far West. See “KORES Strategic Partnership”.

The Company is a reporting issuer in each of the Provinces of Canada. The Company’s common shares trade on the Toronto Stock Exchange (the “TSX”) under the symbol “CS”. Its principal business and registered and records address is at 9th Floor - 999 West Hastings Street, Vancouver, BC V6C 2W2.

The Company carries on its Mexican operations, primarily the Cozamin Mine in Zacatecas State, through Capstone Gold, S.A. de C.V. (“Capstone Mexico”), a company incorporated on December 31, 2003, pursuant to the laws of Mexico. The Company owns 99% of the issued and outstanding securities of Capstone Mexico; the remaining 1% is beneficially owned by the Company and held in trust by its attorney of law in Mexico. All salaried employees at the Cozamin Mine are employed through Capstone Services S.A. de C.V. and all employees paid on an hourly basis are employed through Capstone Mining S.A. de C.V.


The Company carries on its Yukon operations, primarily the Minto Mine, through Minto Explorations Ltd. (“MintoEx”), a company incorporated on April 20, 1993, pursuant to the laws of the Province of British Columbia. The Company owns 100% of the issued and outstanding common shares of MintoEx.

The Company carries on its Chilean mineral-related activities, primarily the Santo Domingo Project, through its partial indirect ownership of Minera Santo Domingo SCM (formerly, Minera Lejano Oeste, S.A.), a company incorporated pursuant to the laws of Chile. The Company owns 70% of the issued and outstanding common shares of 0908113 BC Ltd., which owns 100% of the issued and outstanding common shares of Far West, which in turn owns 100% of the issued and outstanding common shares of Minera Santo Domingo SCM. A subsidiary of KORES owns the remaining 30% of 0908113 BC Ltd.

The Company carries on its British Columbia mineral-related activities, primarily the Kutcho Project, through Kutcho Copper Corp. (“Kutcho Copper”), a company incorporated on May 27, 2008, pursuant to the laws of the Province of British Columbia. The Company owns 100% of the issued and outstanding common shares of Kutcho Copper.

2.2 Inter-corporate Relationships

The following chart describes the inter-corporate relationships among the Company's subsidiaries as at March 1, 2012. The percentage of ownership is indicated for each entity:

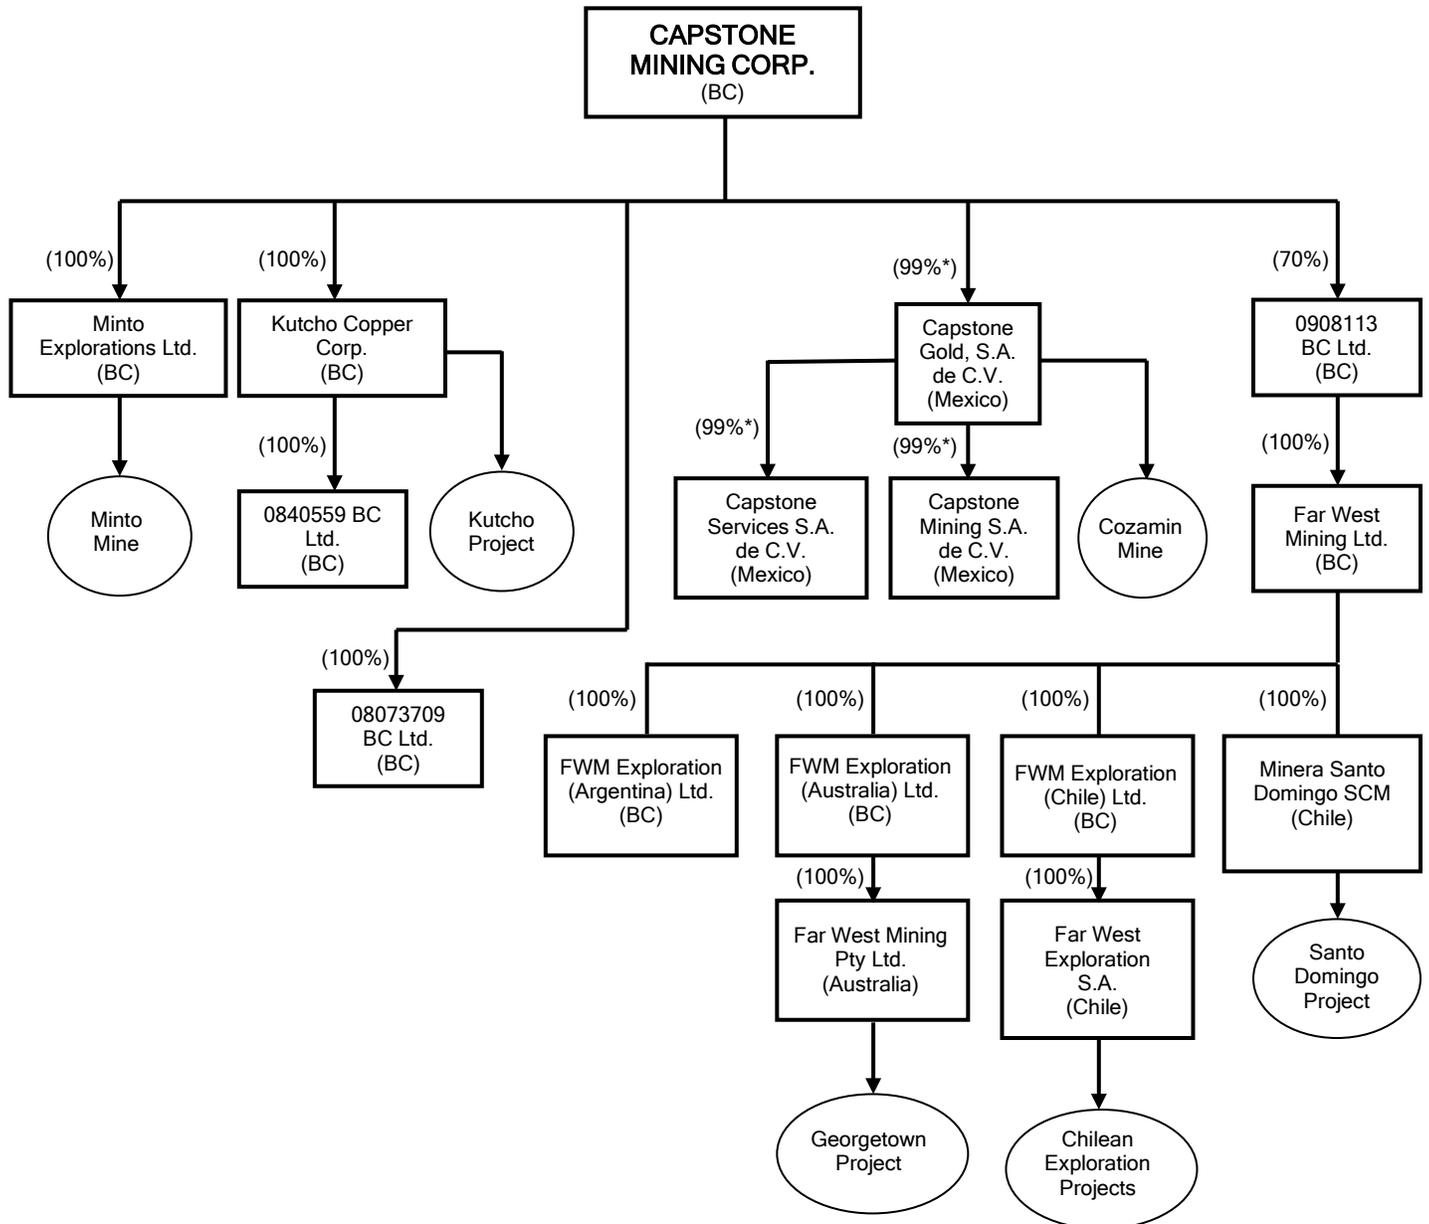

*The remaining 1% is beneficially owned by the Company and held in trust by its attorney of law in Mexico.

ITEM 3 - GENERAL DEVELOPMENT OF THE BUSINESS

The Company is engaged in the acquisition, exploration, development and operation of mineral properties. Over the past three completed financial years, the Company has continued to operate, expand and explore mineral properties. The Company's principal product is copper, although significant amounts of zinc, lead, gold and silver are also produced and sold. The Company currently carries on mining operations in Mexico and Canada and is evaluating potential development projects in Chile and British Columbia. The Company is

active in seeking further production, exploration and development opportunities throughout the world.

3.1 Three Year History

Financial Year Ended December 31, 2009

On November 24, 2008, Sherwood and Capstone completed an arrangement under Section 192 of the *Canada Business Corporations Act* whereby Capstone, through its wholly-owned subsidiary, 7045204 Canada Inc. ("Subco"), acquired all of the issued and outstanding shares of Sherwood, thereby effecting a change of control of Sherwood. Under the transaction, Sherwood and Subco amalgamated to form a new corporation named "Capstone Mining North Ltd." On January 1, 2009, Capstone and Capstone Mining North Ltd. were amalgamated as one company under the name Capstone Mining Corp.

On January 16, 2009, Capstone completed a \$40 million corporate revolving term credit facility with the Bank of Nova Scotia (the "RT Facility"). Under the terms of the RT Facility, the funds are re-drawable over a three year term, subject to a \$8 million reduction every 6 months commencing on the first anniversary, attracting an interest rate of US dollar London Inter-bank Offered Rates ("LIBOR") plus 3.5% (adjustable in certain circumstances). During the three months ended June 30, 2011, the RT Facility was amended to the July 2011 planned \$8.0 million reduction, fixing the amount drawable at \$16.0 million until the end of the term. During the three months ended December 31, 2011, the RT Facility was further amended to extend the term to March 31, 2012.

On January 22, 2009, the Company repurchased C\$38,871,000 in outstanding convertible debentures (the "Debentures") originally issued by Sherwood in February 2007 pursuant to a short form prospectus offering. On December 22, 2008, the Company informed all Debenture holders that the Company was offering to repurchase their outstanding Debentures for C\$1,025.62 for each C\$1,000 principal amount of such Debentures, being equal to the aggregate of (i) 101% of the principal amount of the Debentures and (ii) all accrued and unpaid interest thereon up to but excluding the payment date. As of the date of this Annual Information Form, there are approximately C\$4.6 million of Debentures outstanding.

In February 2009, Capstone announced the completion of an updated, independent NI 43-101 compliant mineral resource estimate for the Cozamin Mine.

In March 2009, Capstone announced that it had entered into a voting agreement with Silver Wheaton Corp. ("Silver Wheaton") whereby Capstone agreed to vote the shares of Silverstone Resources Corp. ("Silverstone") it held in favour of the proposed plan of arrangement between Silverstone and Silver Wheaton whereby Silver Wheaton would acquire all of the outstanding shares and special warrants of Silverstone at a ratio of 0.185 shares of Silver Wheaton per common share or special warrant of Silverstone. In May 2009 Silver Wheaton acquired Silverstone by way of plan of arrangement. This transaction allowed Capstone to exchange approximately 26.8 million shares of Silverstone into 4.95 million shares of Silver Wheaton.

In April 2009, Capstone announced a C\$50,135,000 bought deal equity financing, in which Capstone entered into an agreement with a syndicate of underwriters to purchase an aggregate of 27,100,000 common shares of the Company at C\$1.85 per share. This financing was completed in May 2009, with the underwriters acquiring 4,065,250 over-allotment shares in the Company, resulting in a further C\$7.5 million in proceeds. The proceeds of the financing were allocated for future acquisition opportunities, debt repayment and general working capital purposes.

On May 1, 2009, due to a Presidential Decree in Mexico relating to the pandemic of swine flu, the Company's operations at the Cozamin Mine were temporarily halted, with normal operations resuming on May 6, 2009. This was in-line with the decree ordering that all non-essential government and private-sector activities be suspended for this period.

On September 15, 2009, the Company announced results of a Preliminary Economic Assessment on the Kutcho Project. By going underground, scaling back the throughput and focusing on high grades, Capstone was able to project reduced capital and operating costs as well as a reduction in the environmental footprint of the project.

On December 15, 2009, the Company announced the completion of the Minto Mine Phase IV Pre-feasibility Study that included the potential opportunity regarding underground mining and increased reserves associated with the Area 2, Ridgetop and Minto North deposits.

Financial Year Ended December 31, 2010

In February 2010, the Company announced an increased mineral resource estimate for the Cozamin Mine.

On March 2, 2010, Capstone announced updated mineral resource and mineral reserve estimates as at December 31, 2009 for all of its mineral properties, including the updated mineral reserve estimates for the Cozamin Mine, based on the new mineral resource estimate reported in February 2010.

On March 22, 2010, Capstone was added to the Standard & Poor's S&P/TSX Global Base Metals Index.

On June 23, 2010, the Company reported the results of a NI 43-101 compliant mineral resource estimate for the Minto East deposit at the Minto Mine.

On August 30, 2010, the Company announced the results of a NI 43-101 compliant mineral resource estimate for four separate undeveloped deposits at the Minto Mine.

On September 16, 2010, the board of directors approved a Shareholder Rights Plan, which would provide shareholders and the board with adequate time to consider and evaluate any unsolicited bid made for Capstone.

On December 20, 2010, the Company was added to the S&P/TSX Composite Index.

Financial Year Ended December 31, 2011

On February 24, 2011, the Company reported the results of a Pre-feasibility Study on its Kutcho Project that improved economic viability by accelerating underground excavation of high grade zones.

On March 14, 2011, Capstone reported the results of a Pre-feasibility Study for the Phase V expansion at the Minto Mine which included underground mineral reserves associated with the Minto East, Area 2 and 118 ore deposits.

On March 16, 2011, the Company held its Annual General and Special Meeting where the shareholders approved, amongst other things, the Shareholder Rights Plan.

On May 30, 2011, the Company announced the results of a NI 43-101 compliant mineral resource estimate for the Wildfire/Copper Keel area at the Minto Mine.

On June 20, 2011, the Company announced the result of an initial mineral resource estimate for the Mala Noche Footwall Zone at the Cozamin Mine.

On August 15, 2011, the Company announced the results of the Pre-feasibility Study on the Santo Domingo Project.

Acquisition of Far West

On April 17, 2011 the Company and Far West announced that they had entered into a definitive agreement pursuant to which the Company agreed to acquire all of the issued and outstanding common shares of Far West, by way of a court-approved plan of arrangement.

Far West shareholders were entitled to elect to receive, in exchange for each Far West share held either (i) 1.825 shares of Capstone and C\$1.00 in cash, (ii) 2.047 shares of Capstone and C\$0.001 in cash, or (iii) C\$9.19 cash, subject to proration on the basis of an aggregate maximum cash amount of approximately up to C\$79.0 million and provided that no Far West shareholder that elected option (iii) above, would receive less

than C\$1.00 in cash per Far West share. Far West received, at the meeting of its securityholders held on June 13, 2011, securityholder approval for the arrangement and on June 17, 2011 Capstone completed its acquisition of Far West.

As part of the acquisition, Capstone issued 12,091,629 options in exchange for 5,907,000 options of Far West, which equates to an exchange ratio of 2.047 Capstone options for every Far West option exchanged. Those options issued by Capstone were on the same terms and conditions as those exchanged by the Far West holders. As a result of these exchanges, Capstone recorded the fair value of the vested options of \$19.3 million as a cost of the transaction. In addition, Capstone issued 4,451,221 warrants in exchange for 2,439,025 warrants of Far West which equates to an exchange ratio of 1.825 Capstone warrants for every Far West warrant exchanged. Those warrants issued by Capstone were on the same terms and conditions as those exchanged by the Far West holders, except for the exercise price, which was reduced by C\$1.00. As a result of these exchanges, Capstone recorded the fair value of the vested warrants of \$4.0 million as a cost of the transaction.

The Company filed a Form 51-102F4 Business Acquisition Report on July 7, 2011 in respect of its acquisition of Far West.

KORES Strategic Partnership

Concurrent with the acquisition of Far West, the Company announced that it entered into a strategic partnership with KORES. Under the terms of the partnership, Capstone sold to KORES a 30% indirect interest in Far West for cash consideration of C\$193.9 million. As a result of this partial disposition of its ownership interest in Far West, Capstone recorded a one-time equity adjustment of \$41.2 million to retained earnings, which consists of the amount paid by KORES for its 30% non-controlling interest acquired in excess of a 30% share of the estimated fair value of the Far West net assets.

KORES is obligated to arrange for a debt financier to offer to provide financing for 65% of the bankable feasibility study capital costs, as well as fund 30% of the balance of capital requirements based on its equity ownership share.

The Company issued 40,198,632 shares by way of a private placement at C\$4.3526 per share to a KORES subsidiary for gross cash proceeds of C\$178.0 million.

ITEM 4 -DESCRIPTION OF THE BUSINESS

4.1 General

Capstone is a growing mid-tier copper producer focused on the operation, development and exploration of mineral properties in the Americas. Capstone's material mineral properties consist of:

- the Cozamin Mine, an underground copper mine located in the State of Zacatecas, Mexico;
- the Minto Mine, a high-grade open pit copper mine located in the Whitehorse Mining District, Yukon Territory, Canada;
- the Santo Domingo Project, a large scale copper development project in Chile, in which Capstone holds a 70% interest through a long-term strategic partnership with KORES; and
- the Kutcho Project, a high-grade copper project located in the Liard Mining Division in Northern British Columbia, Canada.

Capstone's strategic goal is to operate and develop assets to grow annual copper production. Capstone intends to leverage its strength in its core operations of acquiring, exploring, developing and operating its mineral properties in politically safe and mining friendly jurisdictions focused on the Americas to attain this strategic goal.

In addition to ongoing exploration at the Cozamin and Minto mines aimed at increasing mine life and throughput, Capstone has a portfolio of early stage base metals exploration projects that have the potential to add to production over the longer term.

The exploration focus is in mining friendly jurisdictions, with preference given to areas where a team is in place and the permitting process is well understood.

As part of the acquisition of Far West Mining in 2011, Capstone acquired property in Queensland, Australia. The Georgetown Project comprises four tenements that cover approximately 185 square kilometres located approximately 300 kilometres west of the port city of Townsville. The project area is prospective for Broken Hill Type ("BHT") silver-lead-zinc mineralization.

Following the discovery of Santo Domingo in 2005, Far West acquired additional prospective land holdings along the IOCG belt. There are 17 exploration properties that cover approximately 460 square kilometres stretching over a 200 kilometre section of the IOCG belt, from south of Copiapó to north of the town of Diego de Almagro.

The Capstone (70%) and KORES (30%) joint venture company owns the portfolio of Chilean and Australian exploration properties.

Capstone also has an earn-in joint venture agreement with Fjordland Exploration Inc. for properties in British Columbia, Canada and may earn a 70% interest in the properties by funding a total of \$6 million of exploration by 2016.

Principal Products and Operations

The Company's principal products and sources of sales are copper, zinc, lead, gold and silver in concentrates. Further information regarding both the Cozamin Mine and the Minto Mine is contained in the sections titled "Material Mineral Properties - Cozamin Mine" and "Material Mineral Properties - Minto Mine" below.

The following table summarizes the actual operating statistics for 2010 and 2011:

Operating Statistics	Cozamin Mine		Minto Mine	
	2011	2010	2011	2010
Production (contained in concentrates)				
- Copper (000's lbs)	41,212	35,552	37,061	40,454
- Lead (000s lbs)	3,960	9,142	-	-
- Zinc (000s lbs)	18,035	17,348	-	-
- Silver (oz)	1,566,367	1,403,170	195,298	206,838
- Gold (oz) ⁽¹⁾	-	-	18,348	22,284
Mining				
- Ore (tonnes)	1,110,104	978,954	728,253	1,494,752
Milling				
- Tonnes processed	1,097,759	981,682	1,258,308	915,051
- Tonnes processed per day	3,008	2,690	3,447	2,507
- Copper grade (%)	1.84	1.80	1.52	2.22
- Lead (%)	0.25	0.63	-	-
- Zinc (%)	1.09	1.27	-	-
- Silver grade (g/t)	61.2	62	6.1	8.7
- Gold grade (g/t) ⁽¹⁾	-	-	0.60	0.93

Operating Statistics	Cozamin Mine		Minto Mine	
Recoveries				
- Copper (%)	92.8	91.2	87.9	90.3
- Lead (%)	64.2	67.6	-	-
- Zinc (%)	68.2	63	-	-
- Silver (%)	72.5	71.7	78.6	80.6
- Gold (%) ⁽¹⁾	-	-	75.5	81.1
Concentrate				
- Copper concentrates (dmt)	70,650	64,356	45,952	46,633
- Copper (%)	26.5	25.1	36.6	39.3
- Silver (g/t)	602	536	132	138
- Gold (g/t) ⁽¹⁾	-	-	12.4	14.9
- Lead concentrates (dmt)	2,796	6,282	-	-
- Lead (%)	64.2	66.0	-	-
- Silver (g/t)	2,216	1,391	-	-
- Zinc concentrates (dmt)	16,720	16,448	-	-
- Zinc (%)	48.9	47.8	-	-

⁽¹⁾ Gold is not assayed on site, resulting in a significant lag in receiving this data.

For the year ended December 31, 2011, the Company recorded gross sales revenue of \$352.5 million on the sale of 79.1 million pounds of copper, 13.6 million pounds of zinc, 3.7 million pounds of lead, 22,258 ounces of gold and 1,529,823 ounces of silver.

Precious Metals Streams

During 2008, the Company sold all of its gold and silver production from the Minto Mine over the life of mine to Silver Wheaton Corp. in consideration for an upfront payment of \$37.5 million and a further payment of the lesser of \$300 per ounce of gold and \$3.90 per ounce of silver (subject to a 1% inflationary adjustment after three years and each year thereafter) and the prevailing market price on the London Metal Exchange for each ounce delivered. If production from the Minto Mine exceeds 30,000 ounces of gold per year, Silver Wheaton Corp. will be entitled to purchase only 50% of the amount in excess of that threshold. The Company has recorded the proceeds received as deferred revenue and will recognize this amount as an adjustment to revenue as the appropriate ounces are delivered.

Under its April 2007 agreement with Silver Wheaton Corp. the Company has a commitment to sell the Cozamin Mine's silver production over a 10 year period to Silver Wheaton. Under the terms of the arrangement, Silver Wheaton agreed to pay for each ounce of refined silver from the mine the lesser of \$4.04 per ounce of silver and the prevailing market price on the London Metal Exchange for each ounce of silver, subject to price adjustments, of which the effects are being reviewed and not determinable at this time. Further, the Company agreed to deliver a minimum of 10.0 million ounces of silver to Silverstone over a ten year period. If, at the end of ten years, the Company has not delivered the agreed upon 10 million ounces of silver, then it has agreed to pay Silver Wheaton \$1.00 per ounce of silver not delivered. To December 31, 2011 a total of 5.9 million ounces had been delivered against the contract since its inception.

Kutcho Copper granted Silver Wheaton a right of first refusal to purchase any gold and/or silver streams from the Kutcho Project, should Kutcho Copper elect to sell such, on terms and conditions to be agreed by mutual consent.

Competitive Conditions

The mining industry is intensely competitive, particularly in the acquisition of additional mineral reserves and resources in all of its phases of operation and the Company competes with many companies possessing

similar or greater financial and technical resources.

The Company's competitive position is largely determined by its costs compared to other producers throughout the world and its ability to maintain its financial integrity through the lows of the metal price cycles. Costs are governed to a large extent by the location, grade and nature of the Company's mineral reserves as well as by operating and management skills. In contrast with diversified mining companies, the Company focuses on copper production, development and exploration, and is therefore subject to unique competitive advantages and disadvantages related to the price of copper and to a lesser extent, the price of base metal by-products. If copper prices substantially increase, the Company will be in a relatively stronger competitive position than diversified mining companies that produce, develop and explore for other minerals in addition to copper. Conversely, if copper prices substantially decrease, the Company will be at a competitive disadvantage to diversified mining companies.

Environmental Protection

The Company's operations (Cozamin and Minto) and development projects (Santo Domingo and Kutcho) are in Mexico, Chile and Canada and are subject to national and local laws and regulation in respect of the construction, operating standards for the mine and, once mine closure occurs, the eventual abandonment and restoration costs for the site. Since both of the operating mines and the proposed Kutcho Project are relatively small tonnage and higher grade operations, the overall financial impact of the environmental protection requirements is relatively minor relative to the overall financial performance of the Company. Each operation is subject to an asset retirement obligation review at year end, which assesses the abandonment and restoration cost for the operation at that point in time, and any changes are reflected in the balance sheet and could flow through the earnings statement. However, while the financial obligations will increase as disturbance increased, given the relatively modest amounts involved, such impacts are likely to be relatively minor from a capital and earnings perspective. Since the Kutcho Project is currently unpermitted, the environmental protection requirements could affect the Project's advancement - both by delaying or preventing project approvals and development and by adding financial burdens to the Project. However, British Columbia is a mature permitting regime and the environmental protection requirements are expected to be appropriate for a mine on the proposed scale of the Kutcho Project. The Santo Domingo project is currently unpermitted; the environmental protection requirements could affect the project's advancement by delaying or preventing approvals consistent with the economic development of the project. Chile has a well-defined permitting process and clear environmental protection objectives and timely approval is expected for a project of the scope of Santo Domingo in its environmental setting.

Overall, the Company's assets are in mature and stable mining jurisdictions and the environmental protection requirements are not anticipated to be a significant impediment to Capstone carrying out its business, nor should they result in an unsustainable burden on the Company's earnings.

Employees

The number of personnel employed by the Company and its subsidiaries at the end of the most recently completed financial year was 1,115 of which approximately 371 were contractors.

Foreign Operations

Two of the Company's material properties are located in foreign jurisdictions, being the Cozamin Mine located in Mexico and the Santo Domingo Project located in Chile.

4.2 Material Mineral Properties

Capstone's material mineral properties consist of:

- the Cozamin Mine, an underground copper mine located in the State of Zacatecas, Mexico;
- the Minto Mine, a high-grade open pit copper mine located in the Whitehorse Mining District, Yukon Territory, Canada;

- the Santo Domingo Project, a large scale copper development project in Chile, in which Capstone holds a 70% interest through a long-term strategic partnership with KORES; and
- the Kutcho Project, a high-grade copper project located in the Liard Mining Division in Northern British Columbia, Canada.

A. Cozamin Mine (Mexico)

The Cozamin Mine is the subject of a report titled “Technical Report, Cozamin Mine, Zacatecas, Mexico” dated March 31, 2009 (the “Cozamin Report”). This technical report was compiled by SRK Consulting (Canada) Inc. and written by Robert Sim, P.Geo., Jenna Hardy, P.Geo., Jeff Woods, CP and Gordon Doerksen, P.Eng., each a qualified person as defined in NI 43-101. The description of the Cozamin Mine in this document is based on assumptions, qualifications and procedures which are set out only in the full Cozamin Report. Reference should be made to the full text of this report, which is available in its entirety on SEDAR at www.sedar.com under the Company’s profile.

Project Description and Location

The Cozamin poly-metallic base metal project is located in the Morelos Municipality of the Zacatecas Mining District near the south-eastern boundary of the Sierra Madre Occidental Physiographic Province in North-central Mexico. The mine and processing facilities are located near coordinates 22° 48’ N latitude and 102° 35’ W longitude on 1:250,000 Zacatecas topographic map sheet (F13-6). The Cozamin property currently consists of 40 mining concessions covering approximately 3,389 hectares.

Capstone acquired the project in January 2004. The project is 100% owned by Capstone, subject to a 3% net smelter royalty payable to Grupo Bacis S.A. de C.V. (“Bacis”), a Mexican resource company. The Cozamin property requires land rental and government fee payments on the mining concessions. In January 2010, the taxes totalled MX\$127,382 and in July 2010, the taxes totalled MX\$75,086. In January 2011, taxes totalled MX\$87,544. In July 2011, the taxes totalled MX\$142,766 and in January 2012, the taxes totalled MX\$189,327.

In September 2009, Capstone Mexico entered into an agreement with Golden Minerals Company whereby Capstone Mexico acquired three mineral claims immediately adjacent to its Cozamin Mine in Zacatecas State, Mexico. The three mineral claims acquired (San Francisco, Santa Rita and La Esperanza) lie within the Company’s current mineral holdings at the Cozamin Mine and immediately north of the current mining areas. Because the principal Mala Noche vein, which hosts all of the currently known mineral resources and mineral reserves, dips north, the Mala Noche vein crosses on to these claims below the current mineral resources and mineral reserves.

These mineral claims were acquired from Minera Largo S de RL de CV, a wholly owned subsidiary of Golden Minerals Company, for a purchase price comprised of (a) an upfront payment of \$1.0 million, (b) future cash payments of a NSR of 1.5% on the first one million tonnes of production from the acquired claims, and (c) cash payments equivalent to a 3.0% NSR on production in excess of one million tonnes from the acquired claims. The NSR on production in excess of one million tonnes also escalates by 0.5% for each \$0.50 increment in copper price above \$3.00 per pound of copper. Final registration of the assignment of rights to La Esperanza (30.19 has.) was approved by the Mexican Mines Department in April 2010.

An environmental impact assessment, known in Mexico as a “Manifestacion de Impacto Ambiental”, identified acid rock drainage and metal leaching as potential concerns manageable with appropriate mitigation measures that have been implemented and an environmental management and monitoring program is currently underway and will be ongoing for the life of mine. Data collected are being used to define an operational environmental management and monitoring program, which will include appropriate environmental management and mitigation plans based on the principle of continuous improvement. These will be reviewed and revised as necessary, on at least an annual basis, with results reported as required to Mexican regulators.

Other issues of environmental concern relate to potential impacts comparable to those in underground mines of similar size with flotation tailings impoundments. These include: dust, tailings handling/management,

storm water diversion, combustibles and reagent management/handling, waste management and disposal and noise. Work to date indicates that environmental impacts are manageable. As part of this management process and best practices on April 2011 the company was awarded the Clean Industry Certification from Mexico's Federal Attorney for Environmental Protection (Procuraduría Federal de Protección al Ambiente or PROFEPA).

Prior to Capstone's involvement in the Cozamin Mine, several environmental studies had been completed by previous owners and the San Roberto mine had been permitted to operate at 750 tpd. Capstone formally received its operating permit on October 20, 2006. This is known in Mexico as a Licencia Única Ambiental ("LUA"). A LUA for the tonnage expansion to 2,600 tpd was received on March 25, 2008. On January 19, 2009, application was made to modify the LUA for the tonnage expansion to 3,000 tpd, which was granted in May of that year. In January of 2011, further application was made to increase the permitted throughput from 3,000 tpd to 4,000 tpd, which was granted in November of 2011.

Accessibility, Climate, Local Resources, Infrastructure and Physiography

The Cozamin Mine is located 3.5 km to the NNE of the city of Zacatecas, the Zacatecas state capital. The municipality of Zacatecas has a population of approximately 130,000 people. Other communities in the immediate vicinity of the project include the following: Hacienda Nueva (3km W), Morelos (5km NW) and Veta Grande (5km N). The Cozamin Mine is accessible via paved roads to the project area boundary where good, all-weather roads provide access to the mine and most of the surrounding area. The project area falls within the Hacienda Nueva and La Pimienta Ejido concessions.

The Cozamin Mine has excellent surrounding infrastructure including schools, hospitals, railroads, and electrical power. The Company has access to a power line and substation that allows the Company to draw up to 7.5 MW from the national power grid. Generators (both operating and back-up) on site have a capacity of 2.0 MW. The ultimate capacity of the current tailings pond at the Cozamin Mine is an additional 9.5 M tonnes. Permits are not currently issued for all of these additional raises to the tailing facility. There is an adequate source of water as well as personnel that avoids the necessity of sourcing "expat" employees.

The climate in the region is semi-arid with maximum temperatures of approximately 30°C during the summer season and minimum temperatures in the winter season producing freezing conditions and occasional snow. The rainy season extends from June until September. The average annual precipitation is approximately 500 mm.

The Cozamin Mine is located in the Western Sierra Madre Physiographic Province near the boundary with the Mesa Central Province (Central Plateau Province). The Zacatecas area is characterized by rounded NW trending mountains with the Sierra Veta Grande to the north and the Sierra de Zacatecas to the south. Elevations on the property vary from 2,400 m to 2,600 masl. The Zacatecas area is located between forested and sub-tropical regions to the southwest and desert conditions to the northeast. The climate in the region is semi-arid. Vegetation consists of natural grasses, mesquite or huizache and crasicaule bushes. Standing bodies of water are dammed as most streams are intermittent.

History

In pre-Hispanic times, the area was inhabited by Huichol Indians who mined native silver from the oxidized zone of argentiferous vein deposits in the Zacatecas Mining District. In 1548, production commenced at 3 mines: the Albarrada mine on the Veta Grande system, and the San Bernabe mine and Los Tajos del Panuco on the Mala Noche vein system. The initial operations worked only the oxides for silver and some gold, and later the sulphide zones were worked for base and precious metals.

During the Mexican Revolution (1910-1917), mining was essentially halted with flooding and cave-ins limiting access. From 1972, Consejo de Recursos Minerales ("CRM") worked mines in the El Bote, La Purisima and La Valencia zones. Historic production from the Zacatecas district is estimated by the CRM (1992) to be 750 million ounces of silver from 20 million tonnes grading over 900 g/t Ag and approximately 2.5 g/t Au. Lead, zinc and copper have also been recovered but the production and grades were not estimated.

Minera Cozamin was established in 1982 by Jack Zaniewicki who consolidated concession holdings over the Mala Noche vein and operated the San Roberto Mine and plant at 250 t/d until October 1996. During this period, Industrias Peñoles S.A. de C.V. ("Peñoles") undertook exploration in the district but did not buy any significant concessions. In all, it is estimated that 1.2 million tonnes of ore were mined and processed at the Cozamin Mine prior to October 1996.

In October 1996, Zaniewicki sold Cozamin for \$6.8 million to Minera Argenta, a subsidiary of Bacis. Bacis expanded the mill to a 750 tpd flotation plant, and processed 250,000 tonnes of ore grading 1.2% Cu, 90 g/t Ag, 0.5 g/t Au, 1.8% Zn and 0.6% Pb from 1997 to the end of 1999. Bacis developed resources principally by drifting and raising on the Mala Noche vein within the San Roberto (Cozamin) mine. Diamond drilling was only used as an exploration tool to identify areas with mineralization peripheral to the developed mine workings. At the end of 1999, Bacis had historic (not 43-101 compliant) resources at San Roberto in all categories that totalled about 6 million tonnes grading about 1% Cu, 0.9% Pb, 3.2% Zn and silver in the range of 85 g/t to 105 g/t.

In 1999, Bacis closed the mine. The principal factors that resulted in the mine closure were low metal prices and under capitalization. Capstone then commenced field work in March 2004 and surface drilling one month later.

In November 2004, the mine was dewatered and exploration drilling continued from underground. The hoist, shaft and mine infrastructure were sufficiently rehabilitated in January and February 2005 to allow for the development of the first cross cuts for underground drilling which commenced in March 2005. Initial metallurgical studies by SGS Lakefield and PRA were received in January and a feasibility report for the project was completed in February 2006. The first phase of underground drilling was completed in April, 2006.

An independent study of geological resources at Cozamin was completed in October 2005 and a second resource estimate study was completed in June 2006. The mine and plant were commissioned in July 2006 and quickly reached an average daily production rate of 1,000 t/d. Mine and plant capacity was then doubled by July 2007. Daily production at Cozamin was increased to 3,000 t/d in late 2008 and maintained at that level to 2011 (3,050 t/d).

Geological Setting

The Zacatecas Mining District covers a belt of epithermal and mesothermal vein deposits that contain silver, gold and base metals (copper, lead and zinc). The district is in the Southern Sierra Madre Occidental Physiographic Province near the boundary with the Mesa Central Physiographic Province in North-central Mexico. The dominant structural features that localize mineralization are of Tertiary age, and are interpreted to be related to the development of a volcanic centre and to northerly trending basin-and-range structures.

The Zacatecas Mining District occurs in a structurally complex setting, associated with siliceous subvolcanic and volcanic rocks underlain by sedimentary and meta- sedimentary rocks. The geologic units of the Zacatecas area include Triassic metamorphic rocks of the Zacatecas Formation and overlying basic volcanic rocks of the Upper Jurassic or Lower Cretaceous Chilitos Formation. The Tertiary rocks consists mainly of a Red Conglomerate unit deposited in Paleocene and/or Eocene times, and overlying rhyolitic tuff and intercalated flows that were deposited from Eocene to Oligocene times. Some Tertiary rhyolite bodies cut the Mesozoic and Tertiary units and formed flow domes.

Exploration

In 2004, Capstone decided to drill test the Mala Noche vein beneath the historic workings of the San Roberto mine. The initial three drill sections, comprised of two drill holes each, all intersected significant economic mineralization over true widths varying from 3.2 m to 14.9 m. These three drill sections were distributed over 550 m of strike extent beneath the historic workings. At that point, Capstone decided to drill single hole sections every 100 m beneath the San Roberto workings. These holes targeted the Mala Noche at approximately 2,150 masl which is 65 m below the historic workings. This strategy resulted in the first 20 exploration holes being distributed over a strike length of 1.4 km. Of these first 20 drill holes, 17 intersected

significant mineralization that averaged 6.64 m in true width and had weighted grade averages of 2.61% Cu, 91.25 g/t Ag and 1.38% Zn.

These significantly higher copper grades and undiminished silver grades are associated with significant amounts of pyrrhotite. This reinforced the company's conviction that the historic workings at San Roberto are located just above the upper reaches of a large copper-silver mineralized system of mesothermal character. Subsequent exploration drilling showed that the copper-silver dominant phase of mineralization extends below 1,865 masl which is 350 m below the historic workings.

As at the date of the Cozamin Report, eight exploration phases have been completed by Capstone on the Cozamin Mine:

- *Phase I*
 - Budget \$1 million (undertaken March 2004 - August 2004).
 - Mapped 5.5 km of the surface trend of the Mala Noche vein system.
 - Completed CSAMT (8 line kilometres) and NSAMT (16 line kilometres) with magnetic survey (26 line kilometres) over the Mala Noche vein system (Zonge Engineering and Research Organization).
 - Completed a 7,484.44 m surface NQ-diameter diamond drill program (holes CG-04-01 to CG-04-19).
 - Completed an independent review (Hawthorne, 2004) of the existing plant and mill to determine cost of rehabilitation and expansion.
- *Phase II*
 - Budget \$2.5 million (undertaken September 2004 - March 2005).
 - Further evaluation of geophysical results.
 - Completed a 10,483.27 m surface NQ-diameter diamond drill program (holes CG-04-20 to CG-04-37) that mainly tested the Mala Noche vein at elevations between the 1,900 m and 2,050 m level below old workings in the San Roberto mine. Completion of preliminary metallurgical test by SGS Lakefield.
- *Phase III*
 - Budget \$4,537,500 (undertaken April 2005 - April 2006).
 - Metallurgical study completed by Process Research Associates Ltd.
 - Clifton Associates Ltd. of Guadalajara, Jalisco, Mexico and Nimbus. Management Ltd. of Vancouver submitted an environmental impact assessment (MIA), an impact study for land use (ETJ) and a risk assessment (ER) to the Mexican federal regulatory agency in charge of environmental issues.
 - Completed a 17,687.70 m underground definition NQ-diameter diamond drill program (holes CG-U01 to CG-U114).
 - Initial resource estimate prepared in October 2005 by Giroux Consultants Ltd. based on the 37 surface drill holes, 66 underground drill holes and 48 underground channel samples.
 - Feasibility study completed in March 2006 by RJR Mineral Services.
 - Updated resource prepared in July 2006 by Giroux Consultants Ltd. incorporating assay results from all surface and underground diamond drill holes, and 768 additional channel samples from the initial 2005 estimate.
- *Phase IV and V*
 - Combined budget \$6 million (undertaken October 2006 - July 2007).
 - Completed a 4,824.56 m surface PQ/NQ-diameter diamond drill program (holes CG-06-38 to CG-06-39 and CG-07-40 to CG-07-42) that tested the Mala Noche vein at elevations between approximately 600-700 m below surface of the San Roberto mine.
 - Completed a 21,441.10 m underground NQ-diameter diamond drill program (holes CG-06-U115 to CG-06-U124, and CG-07-U125 to CG-07-U183). These holes were designed to infill and extend the 2006 estimated resources.
- *Phase VI*
 - Combined budget \$5 million (undertaken November 2007 - December 2008).
 - Completed 30,430 m of HQ diameter diamond drilling from surface (holes CG-08-43 to CG-08-150).

- Completed 9,000 m of NQ diameter diamond drilling from underground (holes CG-07-U184 to CG-08-U205 and also some prior holes were extended).
- *Phase VII*
 - Combined budget \$3.5 million (undertaken January 2010 - December 2010) No drilling was completed during 2009.
 - Completed 1,567 m of underground drilling (holes UGIN-14 to UGIN-35) to test for MNFWZ and San Ernesto vein.
 - Completed 10,342 m of underground drilling at MNFWZ (holes CG-10-U218 to CG-10-U249)
 - Completed 4,519 m of surface drilling (holes CG-10-S151 to CG-10-S158).
- *Phase VIII*
 - Combined budget \$7.9 million (undertaken January 2011 - December 2011).
 - Completed 22,286 m of underground drilling (holes CG-11-U250U to CG-11-U293) targeting MNFWZ.
 - Completed 20,330 m of surface drilling (holes CG-11-S159 to CG-11-S180) for new exploration targets.

From 2004 until later 2009 the Company focused exploration on the main Mala Noche Vein (“MNV”) system where underground drilling targeted on areas in the San Roberto area that needed infill drilling to attain a higher level of confidence and a higher resource classification as steps to completing a mineral reserve estimate. A similar approach was taken with surface drilling focusing on the San Rafael area of the Mala Noche system to the East of the San Roberto Mine.

In 2010, the Company discovered a new zone of high grade copper-silver mineralization called the Mala Noche Footwall Zone (“MNFWZ”). Located in a structure that splays at about 30° on the footwall side from the main mineralization, the MNFWZ is still being tested. The zone is more than 700 m long in the strike direction and locally between 200-500 m in the dip direction and is still open to the east and down dip. The structure is also open locally up dip but it appears to be transitioning to more zinc dominated mineralization and thus presents a lower value target in that direction. In the west the MNFWZ merges with the MNV and is considered largely closed in that area.

The MNFWZ is a significant exploration target and the biggest driver for the 2011 exploration program and the proposed 2012 exploration in progress. Because the new zone splays obliquely from the MNV, where it is being mined, this new structure is in close proximity to the main haulage ways of the Cozamin Mine and presents an attractive exploration target that could transition quickly into the development stage. Two cross-cuts were driven from the producing mine into the MNFWZ on two different levels and two drifts were driven east and west for 38 m and 310 m respectively on level 12.8 and 133 m and 235 m also east and west respectively on level 12. By December 31, 2011 more than 60,000 tonnes of development ore at a grade of 2% copper was mined from this drift, opening up the structure for mapping continuity of grade and providing material for metallurgical testing.

Mineralization

All mineralization at the Cozamin Mine occurs in veins. The main stage of copper-dominant stage of mineralization at the Cozamin Mine can be classified as intermediate sulphidation, high temperature epithermal or, more likely, mesothermal mineralization. The copper-dominant stage of mineralization appears to cut across earlier epithermal zinc-dominant mineralization. The epithermal veins display well banded quartz veins and open space fillings and quartz druse vug linings. The higher temperature veins have significantly less vugs, and the veins can be massive pyrrhotite-pyrite-chalcopyrite.

This transition from epithermal zinc dominant mineralization to copper-dominant mesothermal mineralization is thought to be the result of an evolving, telescoping hydrothermal system that was epithermal in its early stages and became mesothermal as the hydrothermal migrated upwards. Chalcopyrite-pyrite-pyrrhotite mineralization can be seen to cut earlier sphalerite-galena-pyrite mineralization in drill core and workings. Zones of massive pyrrhotite along with apparent retrograded calcsilicates suggest mineral deposition in a mesothermal environment that was superimposed on epithermal alteration and mineralization. This

telescoping hydrothermal system is closely associated with the district's largest center of rhyolite flow domes that may be the upward expression of a felsic stock.

The dominant mineralized vein on the Cozamin Mine is the Mala Noche. This vein has been traced for 5.5 km on surface on the property. It strikes approximately east-west and dips on average at 60° to the North. There are at least 18 shafts that provide access to the historical workings at Cozamin. The largest of these is the San Roberto mine which has a strike length of 1.4 km. Mineralization peripheral to these workings was the principal target of Capstone's exploration at Cozamin.

The Mala Noche vein system occupies a system of anastomosing faults. The mineralized bodies within the Mala Noche appear to be strongest where the disparate faults coalesce into a single fault zone. Results from the exploration and mine development to date indicate that some of the strongest mineralization in the San Roberto mine rakes to the west at approximately -50° within the vein. Post mineralization offsets of the Mala Noche vein are minimal and occur along high angle, normal faults that strike northeast.

Moderate propylitic wall rock alteration is generally limited to 3 m into the hanging wall and footwall. Gangue minerals in the Mala Noche vein consist of quartz, silica, calcite, chlorite, epidote and minor disseminated sericite. The quartz occurs as coarse grained druse coarse crystalline masses, and a stockwork of quartz veinlets. Mineralization in the Mala Noche vein at the Cozamin Mine appears to have been episodic. Early epithermal mineralization and alteration (represented by sulphide pseudomorphs of carbonates and possibly barite and well-banded quartz veins and vug linings of quartz druse) have been overprinted by higher temperature pyrite-pyrrhotite-chalcocopyrite dominant mineralization in a telescoped, intrusive related hydrothermal system. The Mala Noche vein in the San Roberto mine workings shows contained sulphides to occur as disseminations, bands and masses. Considering the limited exposure of the copper-silver phase of mineralization in the current depths of the mine workings, conclusions about mineralization styles at this point in time are preliminary.

Pyrite is the dominant vein sulphide and typically comprises approximately 15% of the Mala Noche vein in the San Roberto mine. It occurs as fine disseminations and veinlets, coarse crystalline replacements, and pseudomorphs of possible epithermal carbonates such as barite and calcite. Pyrrhotite is the second most common sulphide mineral but is present only in the intermediate and deeper levels of the San Roberto mine. It occurs as replacement masses, pseudomorphs of platey masses and acicular replacements probably after amphibole. Pyrrhotite commonly occurs as an envelope to, or intermixed with, strong chalcocopyrite mineralization.

Chalcocopyrite is the only copper sulphide recognized megascopically at the Cozamin Mine. Like pyrrhotite, it is more common at the intermediate and deeper levels of the mine. It occurs as disseminations, veinlets and replacement masses. These masses appear to be fractured and brecciated at intermediate levels in the mine.

Sphalerite is the dominant economic sulphide in the upper levels in the San Roberto mine. Most of the sphalerite is marmatitic. It occurs as disseminations and coarse crystalline masses and is commonly marginal to the chalcocopyrite-dominant portion of the vein.

Galena is less common than sphalerite but is generally associated with it. Where it is abundant, it occurs as coarse crystalline replacement masses. Both coarse and fine crystalline masses of galena are argentiferous.

Arsenopyrite typically occurs as minor, microscopic inclusions in pyrite. Argentite is the most common silver mineral. It has been identified microscopically occurring as inclusions in chalcocopyrite and pyrite. Assays indicate that silver is also probably present in sphalerite and galena.

Bismuth and silver selenides occur as inclusions predominantly in chalcocopyrite and pyrite. The main gangue minerals are quartz and calcite with rhodochrosite, barite and gypsum also reported.

Drilling

In all, 150 surface and 216 underground exploration holes have been drilled at the Cozamin Mine in the period from April 2004 through December 2008 targeting the MNV, which is the cut off for the current mineral reserve estimates. Since 2010, 81 underground holes and one surface hole have targeted the MNFWZ. 35 holes from 2010 and 27 from 2011 are included in the newest mineral resource estimate for the MNFWZ released on February 8, 2012.

Drill holes are located using a total station TRIMBLE instrument, model S6. Down hole survey readings were recorded using either an Eastman Single Shot, FLEXIT SensIT or Reflex EZShot instrument. Survey readings are generally taken every 50-150 m for surface holes and every 50-100m for underground holes. Survey results have been corrected for magnetic declination (+8°). Dip variations in surface holes are not more than 5.3°, with an average value of 1.1°. The maximum down hole dip variation in the underground holes is 15.4° with an average variation of 1.3°.

The Phase I and II surface exploration drill programs totalled 17,967.71 m of NQ-diameter diamond core in 37 holes that were drilled in 2004 and the first quarter of 2005. The Phase III underground definition drill program consisted of 114 holes that totalled 17,736.31 m of NQ-diameter diamond core that were drilled in 2005 and the first half of 2006.

Phases IV and V surface drilling commenced in October 2006 and was completed in April 2007. The five surface holes were drilled with PQ-diameter rods to approximately 300 m, reduced to HQ rods to about 700 m and then reduced again to NQ rods. A total of 4,824.5 m were drilled and 304 samples assayed copper, silver, lead, zinc and gold at ALS Chemex in Vancouver. Underground NQ-diameter drilling commenced in November 2006 and was completed in July 2007. Sixty-nine holes were drilled for a total of 21,441.10 m, with 2,277 samples assayed for copper, silver, lead, zinc and gold at ALS Chemex in Vancouver.

Phase VI surface drilling commenced in January 2008 and was completed in October 2008. The 105 holes were drilled with HQ rods and, where necessary, reduced to NQ rods. A total of 29,642.90 m were drilled from surface and 4,497 samples assayed for copper, silver, lead, zinc and gold. Samples were prepared at ALS Chemex in Hermosillo Sonora, Mexico and assayed by ALS Chemex in Vancouver. Duplicate samples taken for QA/QC were sent to SGS Lakefield in Toronto. Underground NQ-diameter drilling commenced in November 2006 and was completed in July 2007. Sixty-nine holes were drilled for a total of 21,441.10 m. Assaying of 2,277 samples for copper, silver, lead, zinc and gold was carried out by ALS Chemex in Vancouver.

Phase VII both surface and underground drilling commenced in January 2010 and was completed in December 2010. The 4,519 m of surface drilling (holes CG-10-S151 to CG-10-S158) were drilled with HQ rods and, where necessary, reduced to NQ rods, 1,810 samples assayed for copper, silver, lead, zinc and gold. Samples were prepared at ALS Chemex in Hermosillo Sonora, Mexico and assayed by ALS Chemex in Vancouver. Duplicate samples taken for QA/QC were sent to SGS Lakefield in Toronto. Underground NQ-diameter drilling, fifty-two holes were drilled for a total of 11,909 m. Assaying of 5,032 samples for copper, silver, lead, zinc and gold was carried out by ALS Chemex in Vancouver.

Phase VIII both surface and underground drilling commenced in January 2011 and was completed in December 2011. The 22,286 m of underground drilling (holes CG-11-U250U to CG-11-U293) targeting MNFWZ were also drilled with NQ-diameter for a total of forty three holes, Assaying of 8,066 samples for copper, silver, lead, zinc and gold was carried out by ALS Chemex. The 20,330 m of surface drill holes were done through twenty one holes with HQ rods and, where necessary, reduced to NQ rods, 6,777 samples assayed for copper, silver, lead, zinc and gold.

Sampling, Analysis and Security of Samples

Two sampling methods are presented in the Cozamin Report: drill core cutting and underground chip sampling.

Capstone employees are responsible for the all on-site sampling of drill core. Analysis of these samples is done at accredited outside laboratories. Channel samples are prepared by Capstone employees for analysis at the on-site laboratory. Duplicate quality control samples (coarse crush and pulp) are prepared by Capstone employees for analysis at an off-site laboratory. Blind samples comprised of standard reference material are included in the sample streams.

The sample interval for drill core cutting does not exceed 0.5 m in the vein and 2 m in the wallrock. Very high grade intervals are marked out and sampled separately from lower grade zones. Sample boundaries are based on mineral proportions and/or texture (e.g. massive versus disseminated). However, sample intervals are not less than 0.25 m in length.

Only Capstone employees are allowed in the core shack when unsampled core is laid out waiting to be cut. No person other than the geologist responsible for logging is allowed to handle the core prior to sampling. The geologist takes great care to ensure that core is returned to the box in the same position and orientation from which it came. Visitors to the core shack must be accompanied by a Capstone employee. A minimum of ten consecutive samples are placed in order in a large sack. The sack is sealed with tape and by a numbered seal that prevents opening the sack without damaging the seal. The sample number series of the enclosed samples are clearly written on the exterior of the sack. The batch number, the serial numbers of the seals and the corresponding sample number series are written on the transmittal form to be sent to the preparation laboratory.

As at the date of the Cozamin Report, samples are sent to ALS Chemex in Hermosillo for preparation. Upon receipt, samples are inspected for any irregularities. Samples are then dried, weighed, crushed. Two hundred and fifty grams is split and pulverized to at least 85% passing 75 microns. Reject material is retained at ALS Chemex in Hermosillo in a cold storage facility. Prepared pulps are sent to ALS Chemex in Vancouver for primary analysis. Check sample pulps are sent to SGS in Toronto for analysis.

At ALS Chemex, gold and silver were analyzed by fire assay with a gravimetric finish using a 50 g charge. The detection range for this method is 0.05 ppm to 1,000 ppm Au and 5 ppm to 10,000 ppm Ag. Silver was also analyzed with copper, lead and zinc using a four-acid digest by inductively coupled plasma-atomic emission spectroscopy (ICP-AES). The detection ranges with this method are: 1 ppm to 1,500 ppm Ag and 0.001 ppm to 10,000 ppm for Cu, Pb and Zn. Samples with over limit lead results are re-analyzed using the CON02 method in which the sample undergoes a four acid digest producing a lead sulphate that undergoes titration for determination of the lead content. Two samples from Phase V had over limit results (23% to 27% lead). At their lead values, the tolerance level for reporting the grade with the titration method is $\pm 2.5\%$.

At SGS, gold is analyzed by fire assay with an atomic absorption finish using a 30 g charge. The detection range for this method was 5 ppb to 2,000 ppb. Silver was analyzed from a 2 g charge using a multi-acid digest with atomic absorption finish (0.3 g/t to 300 g/t Ag detection range). Over limit results were re-analyzed by fire assay with an atomic absorption finish using a 50 g charge. Copper, lead and zinc are analyzed by inductively coupled plasma-optical emission spectroscopy (ICP-OES) using a four acid digest. Detection limits are: 10 ppm to 10% for copper, 20 ppm to 10% for lead and 10 ppm to 10% for zinc. Over limit results are reanalyzed using the same method but with a sodium peroxide fusion. The over limit detection limit is 0.01% for each metal.

Blanks, standards and pulp duplicates were inserted into the series of underground drill core samples submitted for assay. Typically, standard and blank samples were placed at the start and finish of the mineralized interval within a hole. Approximately two sample intervals per hole were selected to have pulp duplicates prepared, and another two intervals per hole were selected for preparation of core duplicates. Additional quality control samples were inserted into the sequence as deemed necessary, e.g. a blank inserted in the sample sequence after a sample expected to have very high grade to monitor the quality of the assays.

With regard to underground channel sampling, chip samples up to 20 cm wide are collected along the marked sample line. The line number and sample interval are clearly entered in the sample book. Two stubs are placed in the sample bag by the sampler. The sample books are archived at the Cozamin Mine.

The underground channel samples were analyzed at both SGS Toronto (using the same methods as the drill core samples) and at the on-site lab at Cozamin prior to mid-2006. SGS Toronto was used as the primary laboratory and the site laboratory as a check. Pulp samples were analyzed on-site by fire assay with an atomic absorption finish for copper, silver, lead, zinc and iron. From mid-2006 the Cozamin site laboratory has been used as the primary laboratory and check samples sent to SGS in 2006 and ALS Chemex in 2007. The same methods described for the drill hole samples have been used for the underground check samples submitted to SGS and ALS Chemex.

Blanks, standards and pulp duplicates were inserted into the series of underground samples submitted for assay. Standard and blank samples are inserted into the sample sequence approximately 1 in 15 samples, and pulp duplicates every 20 samples. Additional quality control samples were inserted into the sequence as deemed necessary.

Mineral Resource and Mineral Reserve Estimates

The mineral resource estimates for the San Roberto and San Rafael deposits were completed by Capstone staff under the supervision of independent consultant Robert Sim, P.Geol., of SIM Geological Inc., using accepted, industry standard, methods that conform to NI 43-101. The resource model has been developed using MineSight[®] (v4.61).

The mineral resource estimate for the MNFWZ deposit was prepared by independent consultant Ali Shahkar, P.Eng, Principal Consultant with Lions Gate Consulting Inc. (LGCC), using accepted, industry standard, methods that conform to NI 43-101. The resource model has been developed using GEMS[®] software.

Mineral resources exclude all historical (pre-Capstone) and all underground production conducted by Capstone as of December 31, 2009. Mineral resources are constrained by the Capstone property boundary.

The Cozamin mineral resources for the San Roberto, MNFWZ and San Rafael areas are summarized below in two tables broken down as principally separate copper and zinc deposits at a “base case” cut-off of \$35 per tonne. This base case cut-off is appropriate in relation to the current operating costs at the Cozamin Mine.

Cozamin Mine - Mineral Resources by Class for All Copper Deposits as at December 31, 2011 at a US\$35 NSR COG

Classification	Tonnes (000's)	Copper (%)	Silver (g/t)	Zinc (%)	Contained Cu (M lbs)	Contained Silver (M oz)	Contained Zn (M lbs)
Measured (M)	1,802	1.96	70.5	0.92	77.7	4.1	36.5
Indicated (I)	9,611	1.54	53.7	1.42	326.3	16.6	301.6
Total (M&I)	11,413	1.61	56.4	1.34	403.9	20.7	338.1
Additional Inferred	8,359	1.39	42.8	1.00	255.6	11.5	184.1

* Metal Price assumptions (in USD) used to calculate the NSR COG for All Deposits are: Cu=\$2.50; Zn=\$0.80; Ag=\$20.00.

Processing recoveries used to calculate the NSR COG for the MNFWZ Resource are: Cu=92%; Zn=69%; Ag=72%

Processing recoveries used to calculate the NSR COG for the San Roberto Resource are: Cu=92%; Zn=69%; Ag=62%

Cozamin Mine - Mineral Resources by Class for San Rafael Zinc Deposit as at December 31, 2011 at a US\$35 NSR COG

Classification	Tonnes (000's)	Copper (%)	Silver (g/t)	Zinc (%)	Contained Cu (M lbs)	Contained Silver (M oz)	Contained Zn (M lbs)
Measured (M)	-	-	-	-	-	-	-
Indicated (I)	2,619	0.27	40.6	3.09	15.4	3.4	178.2
Total (M&I)	2,619	0.27	40.6	3.09	15.4	3.4	178.2
Additional Inferred	1,744	0.14	32.7	3.01	5.3	1.8	115.8

* Metal Price assumptions (in USD) used to calculate the NSR COG for All Deposits are: Cu=\$2.50; Zn=\$0.80; Ag=\$20.00.

Processing recoveries used to calculate the NSR COG for the San Raphael Resource are: Cu=57%; Zn=24%; Ag=28%

The mineral resource estimate for the Mala Noche Footwall Zone is shown in the table below:

**Cozamin Mine - Mineral Resources by Class for the MNFWZ
as at December 31, 2011 at a US\$35 NSR COG***

Classification	Tonnes (000s)	Copper (%)	Silver (g/t)	Zinc (%)	Contained Cu (M lbs)	Contained Silver (M oz)	Contained Zn (M lbs)
Measured (M)	340	1.98	37.1	0.30	14.9	0.4	2.2
Indicated (I)	1,877	2.12	35.4	0.36	87.9	2.1	14.8
Total (M+I)	2,217	2.10	35.6	0.35	102.8	2.5	17.0
Additional Inferred	3,574	1.86	38.6	0.24	146.9	4.4	18.8

* Metal Price assumptions (in USD) used to calculate the NSR COG for All Deposits are: Cu=\$2.50; Zn=\$0.80; Ag=\$20.00.

Processing recoveries used to calculate the NSR COG for the MNFWZ Resource are: Cu=92%; Zn=69%; Ag=72%

During 2011, exploration sill drifting of the MNFWZ resource commenced. In addition, detailed mine planning was completed enabling the addition of 2.27 million tonnes @ 1.96% Cu, as a diluted reserve. The mine planning included a geotechnical review, an expansion to the ventilation system with associated electrical infrastructure, extension of the existing decline, and utilization of a cut-and-fill mining method. The mineral reserve estimates for San Roberto and San Raphael are shown in the table below:

**Mineral Reserve Estimate by Classification (Dec. 31, 2011)
\$40 NSR COG**

	Tonnage (000s)	Au (g/t)	Ag (g/t)	Cu%	Pb%	Zn%
San Roberto						
Proven	899	0.060	75.52	1.88	0.65	0.91
Probable	5,352	0.119	57.1	1.49	0.3	1.58
Subtotal San Roberto	6,251	0.11	59.75	1.55	0.35	1.49
Mala Noche Footwall						
Proven	375	0.054	33.111	1.806	0.021	0.267
Probable	1,896	0.065	32.528	1.993	0.020	0.339
Subtotal Mala Noche Footwall	2,271	0.063	32.624	1.962	0.020	0.327
Copper Zones						
Proven	1,274	0.058	63.029	1.858	0.465	0.721
Probable	7,248	0.105	50.672	1.622	0.227	1.255
Subtotal Copper Zones	8,522	0.098	52.520	1.660	0.262	1.180
San Rafael Zinc						
Subtotal Probable	1,416	0.468	41.63	0.27	0.43	3.23
Total Cozamin Diluted Reserve	9,938	0.14	44.76	1.08	0.28	1.40

The mineral reserve estimate utilized metal prices of \$2.50 per pound copper, \$0.80 per pound zinc, \$0.85 per pound lead, and \$20.00 per ounce silver

Reconciliation

The extracted blocks for the reserve were compared to the reported production from Mine Engineering and the mill reported production. As-built surveys were utilized to determine what reserves and dilution was extracted from the reserve model. This was then adjusted to consider stockpile activity that occurred from January 1, 2011 to December 31, 2011. The Extracted Reserve to Mill was then calculated and compared to the mill production. The two comparisons are summarized in the following table:

	Tonnage (000s)	Ag (g/t)	Cu%	Pb%	Zn%
Mine Reported Production	1,110	66.18	1.85	0.30	1.29
Total Block Model Extracted	906	65	2.02	0.35	1.17
Variance	+22%	+2%	-8%	-14%	+10%
Stockpile January 1, 2011	1.5	61	1.71	0.52	1.18
Stockpile December 31, 2011	13.9	60	1.88	0.22	0.93
Extracted Block Model to Stockpile	12.4	60	1.90	0.18	0.90
Total Block Model Extracted	906	65	2.02	0.35	1.17
Block Model Stockpile Adjustment	12	60	1.90	0.18	0.90
Extracted Block Model to Mill	894	65	2.02	0.35	1.18
Reported Mill Production	1,098	61	1.84	0.25	1.09
Variance	+23%	-6%	-9%	-28%	-7%

Totals may not be exact due to rounding

As noted in the table, the reserve model predicted less tonnage than was actually extracted in the mine. The higher tonnage was partially offset by lower copper grade in the mined tonnage. A significant variance also occurred with Pb where the model predicted a higher grade than what was processed by the mill.

Mining Operations

The Cozamin Mine commenced operation in June 2006 and since that time has maintained continuous production and has shown continual improvement. Since the start of operations, the mill has undergone numerous upgrades, expansions and operating optimizations. The mine has seen improved access, ventilation and an increase in its mobile equipment fleet. The ore is planned to be extracted using three mining methods; cut and fill using waste rock fill, longhole open stoping and Avoca. Each method has been assigned to different mining blocks depending on the physical characteristics of the orebody.

Development mining and equipment usage was estimated based on the mine schedule. Capital development is conducted using a Mexican-based contractor. All other mining at Cozamin is done using Capstone employees.

The mine extends for a strike length of over 1 km and reserves extend to a depth of 700 m. Access to the underground workings is via two service and haulage ramps and a hoisting shaft.

The LOM plan production rate is 1.1 million tpy and is supported by the operating results of 2010 and 2011.

During 2011, a total of 119,315 dmt of copper concentrates, 2,850 dmt of lead concentrates and 15,463 dmt of zinc concentrates were shipped and recorded as revenue.

From January to December 2011, the mine processed a mill feed of 1,097,759 tonnes of ore grading 1.84% copper, 1.09% zinc, 0.25% lead and 61.2 g/t silver. The average production rate was approximately 3,007 tpd during that period. The mine produced 41.2 million pounds of copper, 18.0 million pounds of zinc, 4.0 million pounds of lead and 1.6 million ounces of silver.

During 2011, 7,246m of development (ramps, drifts and raises) were completed to support stope mining and for capital projects extending mine workings to below the 14 level.

The Cozamin Mine's applicable taxes include the following:

- Corporate Taxes - The Mexican corporate income tax is the higher, in any given year, of the 30% in 2012 (29% in 2013, 28% in 2014) of net revenue (profit) after depreciation or the 17.5% on a cash flow basis allowing for the deduction of capital expenses in the year incurred).
- A valued added tax is payable to the Mexican government. The amount paid in any given year is 100% refundable, and may be used to offset income tax.
- Property taxes are approximately \$20,000 per year.

The payback period for the entire project capital spent to date was completed within the first two years of operation. The payback on all future capital spending will be almost immediate due to large cash flows and minimal capital expenditures planned.

The LOM plan currently has the mine being depleted of current reserves in 2020. There are several potential resource areas that may, if shown to be economic, add life to the mine but are not at a stage where they can be classed as reserves. It must be noted that these resources may never reach a reserve level and, therefore, never be mined.

The closure cost for the Cozamin Mine was re-estimated and updated to December 31, 2011, totalling \$5.5 million.

Exploration and Development

The Mala Noche Footwall Zone was the major exploration driver in 2010 and 2011 and is anticipated to remain so in 2012. There are more than 3 million tonnes of moderate to high grade material in the Inferred Class in the latest Mineral Resource estimate. This material does not have sufficient confidence to be used in engineering studies aimed at increasing Mineral Reserves and as such represents a major upside opportunity at Cozamin for either increased mine life or increased throughput or some combination of both scenarios.

The majority of the 2012 exploration budget is aimed at converting some of these Inferred Resources to Indicated Class or better by infill drilling from underground. Further underground drilling is also needed to test down dip and along strike to the east from the current resource area where the deposit remains open to expansion possibilities.

Drilling from surface is also planned to test the main MNV (host of the San Roberto and San Rafael Mineral Reserves) both to the east and to the west of the San Roberto mine looking for further high grade shoots of copper-silver mineralization at depths not previously tested. This is a program of widely spaced drill holes to test potential at depths below 800 m from surface.

B. Minto Mine (Yukon Territory)

Project Description and Location

The Minto Mine is located in the Whitehorse Mining District in the central Yukon Territory. The property is located approximately 240 km northwest of Whitehorse, Yukon's capital. The project consists of 164 quartz claims covering an area of approximately 2,760 ha.

The project is roughly centred on NAD 83, UTM Zone 8 coordinates 6,945,000 mN, 385,000 mE. The mine is located on the west side of the Yukon River on Selkirk First Nation ("SFN") Category A settlement land (SFN Parcel R-6A).

The 100% registered owner of the claims is Minto Explorations Ltd., a 100% owned subsidiary of the Company. The status of the claims has been recently confirmed with the Mining Recorder. The lease, but not the claim boundaries, have been surveyed by an authorized Canada Lands Surveyor in accordance with instructions from the Surveyor General.

There are no known back-in rights, payments or other agreements or encumbrances to which the property is subject other than a recently amended Cooperation Agreement with the SFN and a net smelter royalty payable to the SFN.

Environmental liabilities at the Minto Mine include the dry stacked tailings facility and waste rock dumps as well as some water stored at the site that is impacted by operations. A closure plan has been developed and approved (most recently on September 9, 2011) detailing methods and costs associated with restoring the site to an acceptable environmental standard. Engineered covers will be placed on tailings and waste rock such that interactions with surface water are minimized. Active water treatment will not be required as passive treatment systems are utilized. A \$15.2 million security bond has been filed with the Yukon Government in accordance with a territorial closure and reclamation policy. The closure plan and related security bond amount are reviewed on a bi-yearly basis.

Accessibility, Climate, Local Resources, Infrastructure and Physiography

The Minto Mine is accessible via the Klondike Highway (No. 2) to Minto Landing on the East side of the Yukon River. At Minto Landing, the mine operates a barge across the river in the summer months and constructs an ice bridge in the winter. The barge has the capacity to carry one B-train transport trailer and truck. There is typically a 6 to 8 week period during each break-up and freeze-up of the Yukon River when there is no access across the river. A 27 km long, all-weather gravel road provides access from the West side of the Yukon River to the project site.

The mine access road crosses one major tributary of the Yukon River, Big Creek, via a single-lane steel span bridge made with reinforced concrete abutments and deck. The highway, river crossing and gravel mine access road are suitable for heavy transport traffic.

When access across the Yukon River is available, operations personnel are transported to the site in commercial buses based out of Whitehorse. During the river freeze and thaw periods, personnel are transported from Whitehorse via charter air services that land on the 1,300 m airstrip located at the mine.

The climate in the Minto area of the Yukon is considered sub-arctic with short cool summers and long cold winters. The average temperature in the summer is 10°C and the average temperature in the winter is -20°C. Average precipitation is approximately 25 cm of rain equivalent per annum in the form of rain and snow. The weather does not impede year round operation of the mine and processing plant except in short periods of harsh cold temperatures (-50°C) that can cause open pit mining operations to be temporarily suspended.

The property lies in the Dawson Range, part of the Klondike Plateau, an uplifted surface that has been dissected by erosion. Local topography consists of rounded rolling hills and ridges and broad valleys. The highest elevation on the property is approximately 1,000 masl, compared to elevations of 460 m along the Yukon River. Slopes on the property are relatively gentle and do not present accessibility problems. Bedrock outcrops can often be found at the tops of hills and ridges. There are no risks of avalanche on the property.

Vegetation in the area is sub-Arctic boreal forest made up of largely spruce and poplar trees. The area has experienced several wildfires over the years, the latest in 2010, and has no old-growth trees remaining. The fire in 2010 led to the partial evacuation of the camp and a short stoppage in production.

The nearest services, including fuel, groceries, hotel, restaurant and clinic, are at Carmacks, approximately 75 km south of Minto on Highway 2. Some services are available at Pelly Crossing, 35 km to the East of Minto. The nearest large community is Whitehorse, with a population of approximately 26,000. It is serviced with commercial flights daily from Vancouver, Edmonton and other northern communities. Whitehorse is also connected via paved highways to British Columbia to the South, Alaska to the West and South to the port of Skagway, where Minto concentrate is trucked for loading onto ocean-going vessels.

The Minto Mine has sufficient power, water, camp and personnel to continue operations through the life of mine plan.

History

In 1970, a joint venture between Silver Standard Mines Ltd. and Asarco Inc. conducted a regional stream sediment geochemical survey in the area. In 1971, DEF claims were staked by United Keno Explorations. That same year a joint venture formed with United Keno Hill Mines, Falconbridge Nickel and Canadian Superior Explorations, to cover follow-up prospecting. IP and VLF-EM geophysical surveys, soil sampling and mapping on the DEF claims followed. In 1973, a main mineralized body was discovered in June. In 1974, a winter road was built from Yukon Crossing and 58 diamond drill holes (11,228 m) on the Minto claims were drilled. From 1975-1976 joint feasibility studies were conducted.

In 1984, Silver Standard changed its name to Consolidated Silver Standard and transferred its interest in the Minto claims to Western Copper Holdings, a subsidiary of Teck Corp. In 1989, Western Copper Holdings transferred its interest in the Minto claims to Teck Corp.

In 1993, MintoEx was formed. Asarco and Teck sold their interest in the Minto claims (and leases) for shares in MintoEx and provided \$375,000 in working capital. Asarco and Teck also received a net smelter royalty of 1.5% to be divided evenly. In that same year, Falconbridge, the parent of United Keno Hill, sold its interest in the DEF claims to MintoEx for \$1 million, with payment being due in 1996. Falconbridge was granted an option to repurchase the DEF claims on January 1, 2005 if the deposit was not in production by then.

An initial public offering of shares of MintoEx completed in 1994. There were 5,912,501 shares issued and outstanding with Asarco being the majority shareholder with 3,297,500 shares (55.8%).

In 1995, a feasibility study was completed. Reserves were 8,818,000T of 1.73% Cu, 0.014 oz/t Au and 0.22 oz/t Ag at 0.5% Cu cut-off grade. Recoveries were 95% for Cu and 85% for Au and Ag. Mine life was projected to be 12 years at a production rate of 477,000 tonnes per year.

In 1996, funding was arranged with Asarco to bring the deposit into production whereby Asarco would provide up to \$25 million. Under the funding arrangement, Asarco would acquire a 70% interest in the project, MintoEx would retain a 30% interest and remain as operator. That same year, MintoEx made the \$1 million payment to Falconbridge for the DEF claims completing the consolidation of the Minto and DEF claims. Also in that year, a 16 km access road was constructed including a barge landing site on the West side of the Yukon River and a bridge over Big Creek. A further 12.8 km of road construction in 1997 was done to complete the new access road. Also in 1997, a co-operation agreement was signed with the SFN. In 1999, a production license was received.

In 2001, most of the Asarco core and all of the Falconbridge core was destroyed by time and forest fire. A limited amount of the old Asarco core that could be recovered was re-sampled in 2002. In 2005, Sherwood Copper Corp. acquired the Minto property in June of that year. In 2006, mill construction commenced. A C\$85 M debt package was arranged, forward sales completed, and concentrate off-take agreement executed in October 2006. In 2007, a Power Purchase Agreement for Minto was signed. That same year, a resource estimate for the Area 2 deposit was completed and the first copper-gold concentrates at Minto Mine were produced. First concentrates from the Minto Mine were delivered to the Port of Skagway, Alaska in July 2007. The Minto Mine declared commercial production and the first Minto concentrates shipped from Skagway in October 2007.

In 2008, Capstone and Sherwood announced a combination to create an intermediate copper producer with Sherwood shareholders overwhelmingly approving the business combination. In connection with the closing of a precious metal transaction, Silverstone provided an upfront payment of \$37.5 M for payable gold and silver from Minto. Capstone and Sherwood completed the business combination in November 2008.

In 2009, the high grade Minto North Deposit was discovered and defined. Increased copper-gold mineral resources at Minto were announced in June 2009. Also in 2009 there was a drill discovery of the Minto East prospect.

In 2010, the high grade Minto East Deposit was defined. Increased copper-gold mineral resources for Area 2/118 and Ridgetop plus a preliminary mineral resource for Minto East was completed and announced in

August 2010. The Minto East mineral resource was further updated later in the year. There were further drill discoveries in 2010 at the Wildfire and Inferno prospects.

In 2011, the Copper Keel and Wildfire areas were further drill delineated and incorporated into a larger deposit called Minto South or MSD for short. A new mineral resource for the combined MSD deposit was announced in May of 2011 and the resource estimate was updated again later in the year and subsequently announced in February of 2012. Also in 2011 there was a drill discovery of the Fireweed prospect.

Geological Setting

The Minto Mine is found in the North-Northwest trending Carmacks Copper Belt along the eastern margin of the Yukon-Tanana Composite Terrain. The Belt is host to several intrusion-related Cu-Au mineralized hydrothermal systems. The Minto Property and surrounding area are underlain by plutonic rocks of the Granite Mountain Batholith (the "Batholith") of the Early Mesozoic Age. The component of the Batholith represented on the Minto Property is the Minto pluton and is predominantly of granodiorite composition. Hypogene copper sulphide mineralization at Minto is hosted wholly within this pluton in sub-horizontal horizons of structurally prepared rock.

Currently five separate deposits of copper-gold-silver mineralization are known. From North to South they are: Minto North; Minto Main; Minto East; Minto South (MSD—a consolidation of Area 2, Area 118, Copper Keel, and Wildfire deposits that are now considered one continuous deposit) and Ridgetop. Each of these deposits closely share a similar style of mineralization hosted by vertically stacked, shallow dipping deformation zones within the intrusion. The Main deposit is currently exposed in the completed open pit and this geometry has been confirmed. The other deposits have drill-delineated mineral resources and/or reserves but mineralization is not exposed at the surface. These deposits and other mineral prospects define a general north-northwest trend informally called the Priority Exploration Corridor.

Copper sulphide mineralization is found in the rocks that have a structurally imposed fabric, ranging from a weak foliation through to a strongly developed gneissic banding. The contact relationship between the foliated deformation zones and the massive phases of granodiorite is generally very sharp. These contacts do not exhibit chilled margins and are considered by MintoEx geologists to be structural in nature, separating the variably strained equivalents of the same or similar rock type.

The more highly strained deformation zones form sub-horizontal horizons and can be traced laterally for more than 1,000 m in the drill core. They are often stacked in parallel to sub-parallel sequences and it is postulated that the foliated granodiorite horizons represent healed, shallowly dipping shear zones within the Batholith; theorized to have formed when the rocks passed through the brittle/ductile transformation zone in the earth's crust in transition from a deep emplacement environment of the Batholith to eventual exhumation. There is on-going debate, however, regarding the stratigraphic, intrusive, or structural nature of the zones hosting the foliation and mineralization. MintoEx have engaged the Mineral Deposits Research Unit ("MDRU") of the University of British Columbia to help understand the mineral paragenesis and deformation history. No other recognized deposit type compares directly with Minto mineralization. While an Iron Oxide Copper Gold ("IOCG") style for the Minto Deposit cannot be unequivocally demonstrated, the authors are of the opinion that this style of deposit provides the most consistent model for the current level of understanding.

The primary hypogene sulphide mineralization consists of chalcopyrite, bornite, euhedral chalcocite, and minor pyrite. Metallurgical testing also indicates the presence of covellite, although this sulphide species has never been positively logged macroscopically.

Texturally, sulphide minerals predominantly occur as disseminations and foliaform stringers along foliation planes in the deformed granodiorite (i.e. sulphide stringers tend to follow the foliation planes). Occasionally, coarse free gold is observed associated with chloritic or epidote lined fractures that cross-cut the sulphide mineralization. The free gold may be due to secondary enrichment during a later hydrothermal process overprinting the main copper sulphide-gold event. Sulphide mineralization is always accompanied by variable amounts of magnetite mineralization and biotite alteration. While these minerals occur in the non-deformed rocks they are present in the mineralized horizons in a much greater abundance in the range of an order of magnitude greater than background.

Supergene mineralization occurs proximal to near-surface extension of the primary mineralization and beneath the Cretaceous conglomerate. Chalcocite is the prime mineral in these horizons along with secondary malachite, minor azurite and minor native copper. Observations of foliated and even copper mineralized cobbles in drilling indicate that “Minto-type” mineralization was exposed, eroded and reincorporated in conglomerate sedimentary deposits by the Cretaceous Age. Other rock types, albeit volumetrically insignificant, include thin dykes (typically less than 1 m) of simple quartz-feldspar pegmatite, aplite, and an aphanitic textured intermediate composition rock.

Structural deformation includes the ore-bearing deformation zones, as well folding present on the regional to micro-scale. Within the deformation zones the foliation exhibits highly variable orientations with the presence of small-scale (several centimetres in amplitude) folds. The ore-bearing zones are also occasionally folded on a scale of several hundred metres. The larger-scale folds appear to be gentle folds with North-South axial traces. Late brittle fracturing and faulting is noted throughout the property area, some of these faults have displacements significant enough to compartmentalize the deposits. For example, the Minto Creek fault bisects the Minto Main deposit, dividing it into north and south areas. The fault is modelled as dipping steeply North-Northeast with an apparent left lateral reverse displacement. The DEF fault defines the Northern end of the Main deposit. It strikes more or less East-West and dips North-Northwest and cuts off the main zone mineralization. The boundary between the Area 2 and Area 118 ore zones is an intermediate NE dipping fault, and at least two parallel structures displace mineralized domains in Area 118. A similar NW striking fault zone appears to define the North-Eastern boundary of the Ridgetop deposit to the South-Western boundary of the Minto South Deposit, and defines the outcrop of the Cretaceous conglomerate.

Pervasive, strong potassic alteration occurs within the flat lying zones of mineralization, and is the predominant alteration assemblage observed in all of the Minto deposits. The potassic alteration assemblage is characterized by elevated biotite contents and minor secondary k-feldspar overgrowth on plagioclase relative to the more massive textured country rock. Additional alteration includes the replacement of mafic minerals by secondary chlorite, epidote, or sericite observed both in mineralized and waste rock interstitially or fracture/vein proximal, as well as variable degrees of hematization of feldspars. Minor carbonate overprint is occasionally observed associated with secondary biotite. Silicification is present but not pervasive in the Minto deposits.

Exploration

Mineral exploration on the Minto property has been conducted intermittently since 1971. Subsequent to the discovery of the Minto Main deposit, which is currently in production, the adjacent southern half of the property has undergone systematic brownfields exploration. Exploration on the northern half is more sporadic.

There are currently more than 1,150 drill holes within a roughly 16 square kilometre area. As such, following up on open mineralized horizons in geological models, projecting mineralized horizons into areas of little or no drilling, and drilling near historical drill hole intercepts were the principal exploration tools employed by MintoEx and its geologists. Subsequent to Capstone’s predecessor, Sherwood Copper’s, acquisition of Minto Explorations Ltd. in June 2005, exploration from 2005 to 2010 has concentrated mostly on diamond drilling. However, an extensive historic soil sample survey and some ground based and airborne geophysics have been conducted and are very useful to guide drilling activity.

The current exploration approach by MintoEx is the systematic evaluation of modern electrical (chargeability); geophysical methods by commissioning various “proof-of-concept” surveys over known mineralization and then expanding survey coverage outward into untested areas using these methods that are calibrated to known deposits. An emphasis is placed on looking for signature analogs as opposed to being pedantic about precise measurements of response. The predominant electrical geophysical methods used are Gradient Array Induced Potential (GAIP), Dipole-Dipole Induced Potential, and Titan-24 DC Induced Potential. Drill targeting is predominantly based upon the coincidence of an anomaly in one of the electrical (chargeability) methods with an anomaly in the 1993 total field airborne magnetic survey (MAG).

Within the currently known extent of the Priority Exploration Corridor, future exploration programs will likely be more reliant solely on electrical/chargeability methods as the near-surface potential and discrete magnetic

bull's-eyes have largely been targeted. Magnetic data in areas located north of Minto North plus areas West and East respectively of the PEC may still be useful as these regions are still relatively under explored.

The current highest priority exploration targets are based on the evaluation of geophysics, soil geochemistry, geologic modelling, and diamond drilling. The targets identified as Ridgetop Southwest, Airstrip, MSD Gap, and the newly discovered Fireweed prospect are all located within a 2 km by 2 km area, south of the DEF fault. MintoEx also sees good exploration potential in the area North of the DEF fault, as evidenced by the discovery of the high grade Minto North deposit early in 2009 and the Inferno prospect discovered in late 2010.

In 2009, several other historic bedrock copper occurrences discovered in the 1970's North of the DEF fault were relocated and confirmed. In addition various copper-in-soil geochemical anomalies, often coincident with magnetic geophysical anomalies, occur throughout the property and many of them remain untested. However, further understanding of the bedrock geology North of the DEF fault is required before many of these targets can be properly assessed and placed in perspective.

Mineralization

The primary hypogene sulphide mineralization consists of chalcopyrite, bornite, euhedral chalcocite, and minor pyrite. Metallurgical testing also indicates the presence of covellite, although this sulphide species has never been positively logged macroscopically.

Texturally, sulphide minerals predominantly occur as disseminations and foliaform stringers along foliation planes in the deformed granodiorite (i.e. sulphide stringers tend to follow the foliation planes). Occasionally, coarse free gold is observed associated with chloritic or epidote lined fractures that crosscut the sulphide mineralization. The free gold may be due to secondary enrichment during a later hydrothermal process overprinting the main copper sulphide-gold event. Sulphide mineralization is always accompanied by variable amounts of magnetite mineralization and biotite alteration. While these minerals occur in the non-deformed rocks they are present in the mineralized horizons in a much greater abundance in the range of an order of magnitude greater than background.

Massive mineralization occurs locally over intervals exceeding 0.5 m in thickness and semi-massive mineralization over several metres in thickness may occur. In these sulphide rich areas, textures often resemble those seen in magmatic sulphide zones with sulphide mineralization interstitial to the rock forming silicate minerals. The higher grade portion of the Minto Main deposits roughly corresponds to the bornite zone. Local concentrations of bornite up to 8% are seen. The precious metal grades are elevated in the bornite zone (very fine gold and electrum occur as inclusions in bornite) and occurrences of coarse grained native gold are noted almost exclusively in bornite-rich material. The chalcopyrite zone is characterized by the metallic mineral assemblage of chalcopyrite-pyrite +/- very minor bornite and magnetite. Empirical observations indicate the highest concentrations of bornite are associated with coarse grained, disseminated and stringer-style magnetite mineralization, up to 20% by volume locally.

The Minto North and Minto East Deposits exhibit a zoning from West to East. High-grade bornite-dominant mineralization is observed in the West with lower grade chalcopyrite-dominant mineralization in the East. The bornite zone is defined by the metallic mineral assemblage bornite-magnetite-chalcopyrite. Bornite mineralization occurs as strong disseminations and foliaform stringers locally >10% to occasional semi-massive to massive lenses up to 2 m in thickness.

Mineralization at the Area 2/118/Copper keel regions of the Minto South Deposit is distinct in that mineralization is predominantly disseminated (plus occasional foliaform stringers) and the semi-massive to massive sulphide mineralization is absent; as a whole the mineralization is more homogeneous and consistent as compared to Minto North or Minto Main. The primary mineral assemblage includes chalcopyrite-bornite-magnetite with minor amounts of pyrite. A crude zoning is present in that the higher grade northern half of the Minto South Deposit shows increased bornite concentrations up to 8% locally.

Mineralization at both Ridgetop and the Wildfire region of Minto South are subdivided into the near surface horizons that have been affected by supergene oxidation and the more typical primary sulphide

mineralization of the deeper zones. The lower zones are defined by a mineral assemblage of chalcopyrite-magnetite with minor amounts of pyrite. Chalcopyrite is the dominant sulphide in the lower zones, and bornite is only observed in minor amounts. Texturally, chalcopyrite occurs as disseminations and foliaform stringers, and is rarely observed as semi-massive to massive bands. Magnetite is coarse grained, disseminated, stringer-style, and can occur in bands up to 0.3 m in thickness, up to 20% volume locally.

Drilling

Under the direct supervision of MintoEx and Capstone staff geologists, MintoEx drilled a total of 44,079 m in 129 drill holes on the Minto property between February and November, 2011 using the contractor Driftwood Diamond Drilling Ltd. of Smithers, BC. Seventy-four 2011 drill holes (24,447 m) were used in the resource estimations discussed in the Minto Report, however 30 drill holes (12,472 m) completed in 2011 are associated with the Fireweed and Inferno prospects that are still being explored and as such are not incorporated into the mineral resource estimates used in the Minto Report.

MintoEx drilled a total of 106,456 m in 376 vertical and 19 angled diamond drill holes at the Minto South Deposit from February 28, 2006 to July 5, 2011. The size of the drill core is NQ and NTW. The median length of the drill holes is 276 m (average 269.5 m); the shallowest hole was 78 m long and deepest hole was 693 m. All 395 drill holes were used in the Minto South Deposit resource estimation. Three angled and 25 vertical holes drilled by ASARCO in 1971 to 1974 were included in the Minto South Deposit resource estimate. Drill hole collars are spaced at approximately 28 m to 60 m at the Area 2 resource sub-domain, 40 m at the Area 118 resource sub-domain, and 40 m to 60 m centers at the Wildfire and Copper Keel sub-domains.

At Ridgetop, MintoEx drilled a total of 16,850 m in 139 vertical drill holes and three angled diamond drill holes from May 27, 2007 to September 20, 2009. The size of the MintoEx drill core is NQ. The median length of the Ridgetop drill holes is 120.5 m (average 122.5 m); the shallowest hole was 54 m long and the deepest hole was 322 m. One vertical hole (150 m) and three angled holes (492 m) drilled by ASARCO in 1971, and four vertical (635 m) holes and four angled holes (571 m) drilled in 1972 were included in the resource. Size of the ASARCO drill core is assumed to be BQ. In 1994, four vertical holes (520 m) and five angled holes (654 m) of HQ-sized core were drilled; these holes were used in the resource estimate. Drill hole collars are spaced at approximately 20 to 60 m centers. Mineralized zones are dipping moderately to the northeast.

At Minto North, MintoEx drilled a total of 11,548 m in 71 vertical and 17 angled diamond drill holes from January 27 to October 4, 2009. In total, 87 drill holes are included in the resource model; one drill hole is excluded because it is located well outside the currently defined deposit boundaries. No historical drill holes are included in the resource model. The size of the MintoEx drill core is NQ. The median length of the 2009 Minto North drill holes is 120 m (average 130 m); the shallowest hole was 57 m and the deepest hole was 342 m. Drill hole collars are spaced at approximately 15 to 20 m centers. Mineralized zones are shallowly dipping to the northwest.

At Minto East, MintoEx drilled a total of 11,067 m in 13 vertical and 20 angled diamond drill holes from April 18, 2007 to August 21, 2010. In total, 33 drill holes are included in the resource model. No historical drill holes are included in the resource model. The size of the MintoEx drill core is NQ with the exception of four drill holes in NTW. The median length of the Minto East drill holes is 332 m (average 336 m); the shallowest hole was 179 m and the deepest hole was 408 m. Drill hole collars are spaced at approximately 40 m centers. Mineralized zones are shallowly dipping to the northwest.

Prior to 2008, all drilling for MintoEx was completed using the imperial system, and footages were converted to metres by MintoEx personnel who logged and recorded all data in metres. Since 2008, drilling for MintoEx was completed using the metric system. Drill hole collar locations were initially located using a differential GPS unit, and more precise location coordinates were surveyed after completion of drilling by the Minto Mine survey team using a Trimble R8 GPS unit.

Bulk density measurements were taken from nearly all holes drilled from 2005 through 2011 in both mineralized and waste material. Measurements were taken at approximately every 1 to 3 m intervals in ore, corresponding to 1 to 3 measurements per run in strongly mineralized material, 1 every 5 m in poorly mineralized material, and at least 1 measurement every 20 to 30 m in waste.

Pieces of core were weighed both in air and in water using an Ohaus triple beam balance. Spot checks on the field data were undertaken internally by MintoEx, where 159 samples from 66 drill holes were analyzed. Measurements were recorded on a triple beam scale on the same piece of core that was originally measured.

Bulk density data obtained prior to 2005 were not used in the resource estimations because the data was constructed by correlating bulk density to copper grade based upon too few actual measurements and because the core upon which this method was constructed was destroyed in forest fires and the methodology could not be audited.

Sampling, Analysis and Security of Samples

From 1973 to 2001, most of the samples sent for analysis were obtained by splitting the core using a mechanical wheel core splitter (in contrast to a diamond saw in 2005-2010). In the case of two holes drilled in 1993 for metallurgical grinding testing, the entire core through the mineralized interval was utilized to improve the validity and reliability of the metallurgical tests and hence no assay data are available.

In 2005 and 2006, the mineralized intervals intersected in core have been sampled in lengths ranging from 0.3 m to 3.0 m and averaging 1.0 m to 1.5 m. The sampling intervals were typically 1.5 m in mineralized material and 3.0 m in longer waste intervals within the mineralized zones. Two shoulder samples were taken in waste at both the upper and lower contacts, consisting of a 1.5 m sample and a 1.0 m sample. Samples did not cross geological contacts. This approach is appropriate for this style of mineralization and the objectives of the program.

In 2007, the mineralized intervals in core were sampled in lengths ranging from 0.24 m to 3.49 m and averaging 1.33 m with a median of 1.5 m from 7,450 sawn core samples. In 2008, the mineralized intervals in core were sampled in lengths ranging from 0.25 m to 4.20 m and averaging 1.29 m with a median of 1.3 m from 12,538 sawn core samples. In 2009, the mineralized intervals in core were sampled in lengths ranging from 0.19 m to 4.50 m and averaging 1.47 m with a median of 1.5 m from 13,026 sawn core samples. In 2010, the mineralized intervals in core were sampled in lengths ranging from 0.22 m to 3.90 m and averaging 1.41 m with a median of 1.5 m from 18,739 sawn core samples.

From 2007 through 2011, sampling intervals were typically 1.5 m to 2.0 m in mineralized material, and 3.0 m in longer waste intervals between mineralized zones. Drill core assay samples were collected from all foliated granodiorite horizons and, typically, sampling extended into the surrounding massive, unfoliated and unmineralized rock for at least 3.0 metres. Individual samples do not cross the geological boundary between foliated and unfoliated rock which is generally a sharp contact. The sampling methodology is appropriate for this style of mineralization.

During 2005 and 2006, drill core samples, Standard Reference Materials ("SRM") and blanks were submitted to the Vancouver Chemex laboratory for copper and gold analysis in North Vancouver, British Columbia. In addition, Chemex was also instructed to perform analysis on pulp duplicates injected into the sample stream at regular intervals. In 2005, all samples were processed in Vancouver. In 2006, some samples were processed at other Chemex locations. Chemex-Elko, Nevada processed 9% of the total number of samples and Chemex-Thunder Bay, Ontario processed 11%. The samples submitted to Chemex were first crushed in a jaw crusher to reduce the material to greater than 70% - 10 mesh (2 mm). A 100 to 250 g subsample was then split and pulverized to better than 85% passing - 75 µm. Copper was determined through a four acid digestion method (HF, HNO₃, HClO₄ digestion and HCL leach) with final copper determination by atomic absorption spectroscopy ("AAS"). Non-sulphide copper was analyzed using sulphuric acid leach with AAS determination. Gold was determined by one assay-tonne fire assay analysis. During 2005, all sample analysis was completed by gravimetric finish. During 2006, the first 17% (1,955) of the sample analysis was completed by gravimetric finish. For the remaining samples (9,182), the gold analysis was determined using AAS method. Silver was analyzed using aqua regia digestion and AAS finish.

The 2007 drill core samples, blanks, SRMs and duplicates were submitted to the Vancouver Chemex laboratory for copper and gold analysis in North Vancouver. Some samples were processed at other locations. SGS Laboratories under agreement with MintoEx processed 485 samples (6% of the total number of samples); assays were all performed at the Vancouver Chemex Lab. Sample preparations were performed at Chemex at Elko, Nevada, 4% of the total number of samples, Chemex at Reno, Nevada 10%,

and Chemex at Terrace, British Columbia, 50%. The samples submitted to Chemex were first crushed in a jaw crusher to reduce the material to greater than 70% - 10 mesh (2 mm). A 100 to 250 g subsample was then split and pulverized to better than 85% passing - 75 µm. Copper was determined by the four acid digestion method (HF, HNO₃, HClO₄ digestion and HCL-leach) with final copper determination by AAS. Non-sulphide copper was analyzed using sulphuric acid leach with AAS determination. Gold was analyzed by one assay-tonne fire assay followed by AAS. Silver was analyzed using aqua regia digestion and AAS finish.

Two laboratories were used in 2008. Drill core samples, blanks, SRMs and duplicates were submitted to SGS Laboratories under agreement with MintoEx, and to the Vancouver Chemex laboratory for copper and gold analysis in North Vancouver after processing at the sample preparation facility in Terrace. SGS Laboratories under agreement with MintoEx processed 61% of the total number of samples from areas outside of Ridgetop. The remaining 39% of the samples were analysed at the Vancouver Chemex Lab. The samples submitted to SGS were first crushed in a jaw crusher to reduce the material to greater than 85% - 10 mesh (2 mm). A 250 g subsample was then split and pulverized to better than 90% passing - 75 µm. The pulp was split with one part analysed for copper and silver at the SGS facility at the Minto site and one part analysed for gold and non-sulphide copper at SGS Red Lake, Ontario operation. During mid-July, silver analyses were performed by SGS at Lakefield, Ontario and Don Mills, Ontario after a switch failure in SGS Minto ICP-AAS equipment. Copper reanalysis due to SRM failures were done by SGS at Lakefield and Don Mills in Ontario. Copper was determined by aqua regia digestion method with final copper determination by atomic absorption spectroscopy ("AAS"). Non-sulphide copper was analyzed using sulphuric acid leach with AAS determination. Samples were assayed for gold using a fire assay procedure on a thirty grams subsample with atomic absorption spectroscopy finish. Silver was analyzed using aqua regia digestion and AAS finish.

The samples submitted to Chemex from July 27 to August 19 were first crushed in a jaw crusher to reduce the material to greater than 85% - 10 mesh (2 mm). A 250 g subsample was then split and pulverized to better than 90% passing - 75 µm. The sample turnaround time increased to nearly seven weeks after implementing the finer crush, so subsequent samples were first crushed in a jaw crusher to reduce the material to greater than 70% - 10 mesh (2 mm) with a 250 g subsample split and pulverized to better than 85% passing - 75 µm. At Chemex, copper was determined by the four acid digestion method (HF, HNO₃, HClO₄ digestion and HCL-leach) with final copper determination by AAS. Non-sulphide copper was analyzed using sulphuric acid leach with AAS determination. Gold was determined by one assay-tonne fire assay analysis followed by AAS. Silver was analyzed using aqua regia digestion and AAS finish.

The 2009 and 2011 drill core samples, blanks and SRMs were submitted to the Vancouver Chemex laboratory for copper and gold analysis in North Vancouver. In addition, Chemex was also instructed to perform analysis on pulp and coarse reject duplicates injected into the sample stream at regular intervals. After August 2010, the pulp and coarse reject duplicates were returned to the MintoEx office in Vancouver, where they are transferred to fresh Kraft paper bags, assigned new sample numbers and resubmitted to Chemex as "blind duplicates". The samples submitted to Chemex were first crushed in a jaw crusher to reduce the material to greater than 70% - 10 mesh (2 mm) with a 250 g subsample split and pulverized to better than 85% passing - 75 µm. Copper was determined by aqua regia digestion method with final copper determination by AAS. Non-sulphide copper was analyzed using sulphuric acid leach with AAS determination. Gold was determined using a fire assay procedure on a thirty grams subsample with atomic absorption spectroscopy finish. Silver was analyzed using aqua regia digestion and AAS finish.

Of the 79 drill holes in the 2006 Area 2 database, 11 collars (13%) were selected at random in the area of the resource estimation boundaries and were checked by a handheld Garmin GPS. The recorded values show good agreement and differences lie within the error of the handheld GPS. In December 2008, MintoEx conducted a review of the drilling data from Area 2/118 and Ridgetop deposits. A total of 10% of the values in the database were checked against primary sources including the borehole collar surveys against survey records, lithology and mineralization data against core logs and assays for copper and gold against signed certificates of analysis. No significant errors were found. In November of 2009, Kirkham Geosystems manually compared the Minto North Deposit database assays against original assay certificates. A total of 15% of the values were checked and no errors or omissions were found. In addition, a spreadsheet check was run against the Area 2, Area 118 and Ridgetop database.

Exploration work by MintoEx was conducted using a quality assurance and quality control program generally meeting industry best practices. All aspects of the exploration data acquisition and management including surveying, drilling, sampling, sample security, and assaying and database management were conducted under the supervision of appropriately qualified geologists and include written field procedures and verifications.

Analytical control measures typically involve internal and external laboratory control measures to monitor the precision and accuracy of the sampling, preparation and assaying. Insertion of certified SRM and blank material monitors the reliability of assaying results and is also important to prevent sample mix-up and monitor potential contamination of samples.

Assaying protocols typically involve regular duplicate and replicate assays to monitor the reliability of assaying results throughout the sampling and assaying process. Umpire assaying is typically performed as an additional reliability test of assaying results by re-assaying a set number of sample rejects and pulps at a secondary laboratory.

ALS-Chemex and SGS implemented internal laboratory measures consisting of inserting quality control samples (blanks and certified reference materials and duplicate pulp) within each batch of samples submitted for assaying.

Quality control procedures used during the 1971 to 2001 drill programs are not known, with the exception of 10 samples submitted for umpire analysis in 1994. The 2001 sample shipments were accompanied by four types of quality control samples, namely: a blank (granodiorite from the site), an ASARCO coarse standard, prepared pulp samples and duplicate splits (coarse ground rejects and the pulverized rejects).

MintoEx inserted one each of an SRM, blank, pulp reject duplicate and coarse reject duplicate (for Chemex only) with every 16 sawn core samples. Umpire assaying of pulps at a secondary laboratory was conducted periodically, typically involving analysis of 0.5% or more of the sawn core samples.

Mineral Resource and Mineral Reserve Estimates

A primary objective of the Minto Phase V Report was to produce a revised independent mineral resource evaluation for the Area 2/118 and for the Ridgetop deposits. The Minto Main resource was reviewed and approved by SRK. The Minto North and Minto East deposits were evaluated by Kirkham Geosystems Ltd. Subsequent to the Minto Phase V Report additional drilling was conducted that indicated continuity of mineralization between Area 2/118, Copper Keel and Wildfire.

SRK has conducted further resource modelling and mineral resource estimation based upon this new drill information.. Area 2/118 and the exploration areas Copper Keel/Wildfire are now considered continuous (Minto South Deposit) and a new combined mineral resource estimate was reported on May 30, 2011. A revised resource estimate was reported on Feb 2, 2012. This update is being considered with respect to a potential prefeasibility study that commenced in Q4 2011 and may be issued in 2012 pending evaluation of economic key performance indicators.

The mineral resource estimate for the MSD and Ridgetop deposits was completed by Dr. Wayne Barnett, Ph.D., Pr.Sci.Nat., an independent qualified person as this term is defined in NI 43-101. The effective date of the revised MSD resource estimate is September 13, 2011; the effective date of the Ridgetop resource estimate is August 30, 2010. Marek Nowak, P.Eng., analyzed the data, reviewed and validated the mineral resource estimates for Minto South and Ridgetop. The Minto North and Minto East resource estimates were completed by Garth Kirkham, P.Geo., of Kirkham Geosystems Ltd., an independent qualified person as this term is defined in NI 43-101. The effective date of the Minto North resource estimate is December 1, 2009; the effective date of the Minto East resource estimate is October, 2010.

Total Mineral Resources by Class for all Minto Mine Deposits, *** at a 0.5% Cu COG
(Effective dates is December 31, 2011)**

Classification	Tonnes (000's)*	Copper (%)	Gold (g/t)	Silver (g/t)	Contained Cu (000's lbs)*	Contained Gold (000's oz)*	Contained Silver (000's oz)*
Measured (M)	14,828	1.35	0.53	4.43	441,744	254	2,114
Indicated (I)	33,103	0.98	0.32	3.42	714,010	341	3,643
Total (M+I)	47,931	1.09	0.39	3.73	1,155,754	595	5,758
Additional Inferred	8,493	0.81	0.24	2.88	151,764	65	788

* Rounded to nearest thousand; totals may not sum exactly due to rounding.

** Includes material mined but not processed during pre-stripping activities in the Area 2 region of MSD and currently held in stockpile.

*** Includes any resources remaining in the Minto Main Deposit not considered in current mine plans but excludes material existing in stockpiles that originated from the Minto Main Deposit.

In order to demonstrate the reasonable prospect of economic extraction, SRK constrained the overall mineral resource with Whittle™ pit optimization software using the parameters shown in the table below. The Cost Factor 1 shell was selected as the constraining surface and resources within the shell were calculated.

The mineral reserve estimate for both OP and UG are summarized in the table below. During 2011 mining of the Main Zone deposit was completed. In addition, extraction from the MSD deposit commenced. Since the stockpiles contained material from both deposits, they would now be classified as a separate entity.

Minto - Mineral Reserves by Class

	Tonnage (000s)	Cu%	Au (g/t)	Ag (g/t)
Minto North Open Pit				
Proven	1,523	2.36	1.28	8.55
Probable	5	2.25	0.81	9.38
Subtotal Minto North	1,529	2.36	1.27	8.56
Ridgetop Open Pit				
Proven	627	1.10	0.25	2.05
Probable	710	1.11	0.37	3.55
Subtotal Ridgetop	1,337	1.11	0.32	2.85
118 Open Pit				
Proven				
Probable	491	1.29	0.09	1.73
Subtotal 118	491	1.29	0.09	1.73
Area 2 Open Pit				
Proven	3,309	1.329	0.507	4.643
Probable	1,449	0.941	0.260	3.096
Subtotal Area 2	4,758	1.211	0.432	4.172
118 Underground				
Probable	764	1.78	0.69	7.17
Area 2 Underground				
Probable	967	1.73	0.75	6.77
Minto East Underground				
Probable	709	2.28	1.04	6.15
Stockpiles				
Proven	852	1.23	0.41	3.71
Total Minto Diluted Reserve	11,407	1.506	0.597	5.007

Reconciliation

For Main Zone ore reserves mined in 2011, the following table compares grades based on the reserve block model, created from exploration drilling and interpretation, to the blasthole block model, created from on-site assays of each blasthole. The comparison is done within the unrestricted polygonal areas defined and mined as ore by the mine's grade control process, based on blasthole assays.

Production (Blasthole) Model		
ORE	Tonnes	PM-Cu (%)
Sulphide	286,000	1.69
POX (>1%)	154,000	1.91
Total	440,000	1.77

Reserve Model		
ORE	tonnes	RM-Cu (%)
Sulphide	370,000	1.72
POX (>1%)	163,000	1.94
Total	533,000	1.79
Difference		-17%

It can be seen in the above table that grade predicted by the reserve model was within 1% of the grade seen in blasthole sampling. While the reserve model and the blasthole model agree closely on grades within the zones determined to be ore by blasthole samples, the reserve model predicted that substantially higher ore tonnage would be released: 533,000 tonnes of ore were expected, but 440,000 tonnes were actually identified as ore according to blasthole assays.

The reasons for this discrepancy are as follows:

- A very small tonnage percentage of the overall Minto Main deposit was mined during the period. Despite in-pit drilling to refine the model, natural conditional bias in the long range resource model tends to under-estimate the higher grade portion of the deposit and overestimate ore in the lower grade periphery of the deposit which was mined in 2011.
- Individual ore blocks in the resource model were, in some instances, diluted out of reserves by the lack of selectivity in mining due to the use of fixed 6m bench heights.

Also of note in the above tables is the distinction between POX and Sulfide ore: POX is defined as material having an acid-soluble copper content greater than 15%. This material had a higher cut-off grade applied to it in the field than sulfide ore: 1.00% Cu vs. 0.62% Cu. This practice is not consistent with the way that reserves were originally reported for the Main pit; the tables above will therefore report less POX material than the resource model originally predicted.

There was minimal ore production from the Area 2 pit in 2011. Therefore no attempt was made to reconcile this production with the block model.

Mining Operations

During 2011 there were no modifications to the open pit designs or the underground layouts that were issued by SRK in the December 2010 Phase V Prefeasibility Study.

Regarding Minto underground deposits (Area 2, 118 and Minto East), after taking into consideration all of the known contextual factors, it was considered that the most suitable mining method would be room and pillar ("RAP"). The method is simple and has numerous examples of success in low dipping, moderately thick, shallow deposits with favourable rock conditions. The method allows excellent production capacity potential and relatively low cost while still providing mining flexibility and low dilution. Access to the deposits is via a portal outside of the pit design limits where a decline at a -15% gradient will be developed.

Productivity from room and pillar mines is normally very high due to multiple mining faces available, and has a simple, repetitive mining sequence. The fact that the method does not use backfill means that there is no time lost with a backfilling sequence temporarily constraining mining areas. Mining mobile equipment for RAP is the same as used in development mining; therefore, specialty equipment is not required.

The strong, massive nature of the Minto rock and shallow depth of the deposits mean that fairly high extraction ratios (plus 75%) would reasonably be expected. For deposits with a vertical thickness of over 10 m, a hybrid post pillar cut and fill ("PPCF") method is proposed. These thicker zones would require more than two 5 m high cuts making RAP undesirable due to the ore left behind in large pillars.

Surface deposits, (Area 2, 118 Minto North and Ridgetop) will continue to be developed as open pits that will rely on a contractor mining approach.

The process design is based on treating ore with similar hardness to the current Minto Main ore being processed, or similar to that tested by DJB Consultants in October 2007. The throughput selected is a function of the existing Minto plant milling circuit capacity. Ausenco Minerals Canada Inc. ("Ausenco") has modelled the current plant and predicted a throughput of 171 dry metric tonnes per hour based on a portion of the SAG mill feed being crushed to 80% passing 25 mm in a pre-crushing circuit. An average of 3,750 tonnes per day will be processed at a design availability of 91.3%.

The key criteria selected for the plant design are:

- treatment of an average 3,750 dry tonnes per day for 2012 and beyond;
- surface deposit material from Minto North, Minto South Deep and Ridgetop North and South as well as underground deposit material from Minto East, Area 2/118, Copper Keel and Wildfire will be processed through the Minto plant;
- design availability of 91.3%, being 7,997 operating hours per year, with standby equipment in critical areas; and
- sufficient plant design flexibility for treatment of all ore types as per test work completed at design throughput.

Based on a start date of January 2012, the open pit and underground mines will produce a total of 11.4 million tonnes ("Mt") of ore (includes Main Pit and Area 2 stockpile balance as of beginning of 2012). Approximately 2.4 Mt of ore is planned to be produced from UG mining at a rate of 2,000 tpd. Mill operations continue processing the accumulated ore stockpiled when mining ceases, for a total mill operating life of 10 years, i.e., to the end of 2021.

The life-of-mine plan focuses on accessing and milling high-grade ore first, with lower grade material sent to stockpiles for blending and processing later in the mine life. This is based on repeated exploration success that has supported successive deferrals in the timing of the processing of this lower grade material, as additional higher grade mineralization is discovered and defined.

MintoEx has an established copper concentrate purchase contract with a metal trading company MRI Trading AG ("MRI"). The terms of the contract are confidential; however, SRK confirms that the appropriate terms were used in the economic model. Under the terms of the contract, MRI has the obligation to buy all of MintoEx's copper concentrate production and MintoEx has the obligation to sell all of its copper concentrate production to MRI. The contract is in effect from July 2007 to the end of 2013.

MintoEx has a copper price guarantee contract with Macquarie Bank for copper production that is valid until the third quarter of 2011. MintoEx sold most of its gold and all of its silver production to Silverstone Resources in November 2008. Silverstone was subsequently bought by Silver Wheaton who now owns the Minto mine precious metal stream. Silver Wheaton pays Minto \$300/oz Au and \$3.90/oz Ag through the mine life.

The environmental assessment and permitting process for the Phase V expansion will require environmental conditions be further updated based on recent site monitoring program results. Specifically, baseline environmental conditions of the drainage to the north of the Minto Creek drainage will be of interest to

assessors, as the Minto North deposit is located approximately 100 m into the drainage. Although physically there will likely be minimal disturbance in this drainage from the mining activities, there is potential for there to be effects to the aquatic receiving environment downstream.

Federal and Provincial tax calculations for the Minto Mine start with the before tax cash flow amounts from the cash flow portion of the model and essentially deducts the cost of building and developing the mine and mill (Class 41a UCC, CEE and CDE) as would be expected over the life of the mine as allowed by the Canadian tax rules. Generally Class 41a UCC and CEE can be deducted 100% against profit from the mine while CDE can only be deducted on a declining balance basis at 30% per year. The losses that are generated in the first few years of mine operation are deducted against income in later years.

The Yukon Quartz Mining Royalty ("Yukon mining tax") is a much different tax calculation than would normally be expected. It also starts with before tax cash flow from the cash flow portion of the model and deducts depreciation at 15% per year on a straight-line basis for the mine capital assets and mill capital assets. It deducts deferred pre-operating costs that are not capital assets on a units of production method. The Yukon mining tax does not have a loss carryover or carry back provision. Taxes are paid at rates that increase as income increases to a maximum of 12%.

C. Santo Domingo Project (Chile)

The Santo Domingo Project is the subject of a report titled "Technical Report on the Santo Domingo Project, Chile" dated September 28, 2011 (the "Santo Domingo Report"). This technical report was prepared by Ausenco Minerals Canada Inc. The Santo Domingo Report was written by: David Brimage, AusIMM CP., David W. Rennie, P.Eng., John Nilsson, P.Eng., Art Winkers, P.Eng. and Michael Davies, P.Eng., each a qualified person as defined in NI 43-101. The following descriptions of the Santo Domingo Project are based on assumptions, qualifications and procedures which are set out in the Santo Domingo Report. Reference should be made to the full text of this report which is available in its entirety on SEDAR at www.sedar.com under the Company's profile.

Project Description and Location

The Santo Domingo Project is based on a large open pit copper/gold/magnetite resource located approximately two hours north of Copiapó by paved road and 5 km southeast of the town of Diego de Almagro in Region III of Northern Chile. The Santo Domingo property was originally part of the BHP Candelaria project area, which consisted of eight non-contiguous concessions in a north-south corridor extending between the towns of Taltal to the North and to a point about 75 km South of the city of Copiapó.

The Santo Domingo Project area encompasses 82 contiguous mining concessions covering an area of 19,841 hectares in Region III of Northern Chile. The centre of the deposit is located at approximately 26°28'00"S and 70°00'30"W.

Far West was formerly a TSX listed mineral exploration company headquartered in Vancouver. On June 17, 2011, Far West was acquired by Capstone. The Santo Domingo project is now 70% owned by Capstone and 30% by KORES.

The initial Candelaria Project land package assembled by BHP in 2002 consisted of 3,434.5 km² of exploration concessions. In 2002 and 2003, Far West and BHP entered into Project Area Agreements that allowed Far West to earn an interest in the concessions within the project area. Effective August 5, 2003, Far West assigned interests in the Project Area Agreements to its wholly owned Chilean subsidiary, Minera Lejano Oeste S.A. ("MLO"). On May 4, 2005, BHP terminated any interest in the concessions within the project area and commenced transfer of title of all these concessions to MLO in exchange for a retained 2% NSR royalty. As of the date of the Santo Domingo Report, all concessions in the Candelaria Project area are 100% owned by MLO.

Far West controls 100% of 82 exploitation concessions ("constituidas") in the Santo Domingo area, including the exploitation concessions acquired through option (Estrellita 1/10, Iris I 1/200, Iris II 1/160, Iris 1/55, Estefanía, Manto Ruso 1/8, Pichanga 1/100, and Santo 1/20). In all, the 82 exploitation concessions cover a

total area of 19,841 ha.

Accessibility, Climate, Local Resources, Infrastructure and Physiography

Access to the Santo Domingo property area is 1 kilometre off the paved highway C-17 from Diego de Almagro (5 km to the North) to Copiapó (ca. 120 km to the South).

The Santo Domingo property is located in the Atacama Desert, one of the driest regions on earth. The climate is arid and the weather is generally clear and warm in all seasons and poses no limitations on field activities. The closest weather station where temperature and precipitation measurements have been recorded for some time is the city of El Salvador. The daytime high and low temperatures there are 26°C and 0.8°C for July, and 30°C and 9.8°C for January, respectively. The highest average recorded precipitation is in May at 14.8 mm and the lowest is in December at 0 mm.

The region has well-established infrastructure (power, water, transportation, work force, etc.) to service the mining community. There is no infrastructure at Santo Domingo property itself other than gravel roads for access to the property and drill sites. The project is approximately 1 km from a paved highway and 5 km from a sub-station that provides power to the town of Diego de Almagro.

Several cities or towns are near the Santo Domingo property. Diego de Almagro, located adjacent to the property, has a population of several thousand people. Chañaral is a deepsea port less than one hour's drive to the west of the property. It has a population of approximately 10,000 people, hotel accommodations, food, fuel, and minor services. The most important logistical centre in the region is Copiapó, approximately two hours' drive to the south of the Santo Domingo property. It has a population of approximately 150,000 people, an airport with daily scheduled flights to Santiago and Antofagasta, and abundant businesses offering services specific to mining and exploration.

Vegetation is very sparse. In the valley bottoms, plant life consists of small, widely-spaced bushes a few tens of centimeters in height. Hillsides and peaks are generally devoid of any vegetation. In spite of the dry conditions, hills of gentle to moderate relief have been cut by deep gullies and flanked with gravel-filled valleys and alluvial fans; evidence of water movement preserved since conditions were less arid. Elevations range from approximately 900 to 1,500 masl.

Seismic zone maps of South America indicate that the project area is likely to have high seismicity and the site is considered part of Zone 3 (shores) according to the Chilean National Design Code Nch2369, with a peak ground acceleration of 0.4 g.

History

Mining for copper, gold, and iron has been ongoing in this area since early in the 19th century. Small mines in the region supplied copper ore to smelters in both Chañaral and Pan de Azúcar. Independent copper mines have been in operation on what is now Anglo American's Manto Verde deposit (located 25 km Southwest of the Santo Domingo property) since the late 1800s, but significant production in this area started in 1906. Between 1906 and 1935, a reported total of 400,000 tonnes grading in excess of 3% Cu was mined from the Manto Verde fault zone.

Previous ownership of concessions in the Santo Domingo property is unknown. The area appears to have had a relatively long history of small-scale mining and prospecting. Mining activities on the nearby Manto Verde deposit date back to the late 1800s and it is probable that workings in the Santo Domingo property have a similar age.

Many small inactive mines and a myriad of pits occur throughout the property area. The mines typically exploited copper mineralization hosted in narrow (one meter to five meters) steeply-dipping veins and, in some cases adjacent strata to these veins. The largest mines are located along approximately 700 m of the Santo Domingo structure. These mines include La Estrella, La Estrellita, El Iris, and others. Judging by the size of the dumps and number of adits, it is possible that this specific area produced upwards of 500,000 tonnes. A second area of minor production is a small open pit with peripheral underground workings on the

Caprichosa concession in Target Area 4a2 (Far West nomenclature) that may have produced in the order of 20,000 tonnes of copper oxide-bearing coming from a specularite stratum.

However, surface workings at the majority of the mines in the Santo Domingo property (other than those noted above) are generally less than a few tens of metres in length and the extent of underground development is unknown. Judging by the quantity of dump material adjacent to most of these mines, it is probable that production was no more than a few thousand tonnes at any one site.

The initial Candelaria Project land package was assembled by BHP in 2002. In 2002 and 2003, Far West and BHP entered into Project Area Agreements that allowed Far West to earn an interest in the concessions within the project area. Effective August 5, 2003, Far West assigned interests in the Project Area Agreements to MLO. On May 4, 2005, BHP terminated any interest in the concessions within the project area and commenced transfer of title of all these concessions to MLO in exchange for a retained 2% NSR royalty.

No historic resource estimates or production records for workings in the Santo Domingo property have been located.

Geological Setting

The Santo Domingo deposit is located in the Chilean Iron Belt (CIB) to the east of the Atacama fault zone, a complex sinistral strike-slip and dip-slip fault system that runs sub-parallel to the coast of Northern Chile for over 1,200 km. The CIB contains a large number of copper and iron deposits of cretaceous age. The geology of the belt consists of volcanic flows and tuffs, dioritic intrusives and calcareous sediments typical for a volcanic arc environment. The geology of the Santo Domingo is dominated by andesitic volcanic flows and limestone horizons with occasional outcrop of diorite intrusions. Large parts of the deposit are covered by younger cover consisting of clay and gravel. The CIB is characterized by a large number of small surface showings of copper oxide, frequently accompanied by specularite. The Santo Domingo deposit is essentially blind and is hosted by extensive tuff horizons that are overlain by andesitic volcanics.

Exploration

Exploration work in the Santo Domingo area was conducted by Far West from July 2003 to May 2010. It consisted of:

- 50 km² of geological mapping at 1:25,000.
- 50 surface rock samples for analysis for Au and a 27-element Inductively Coupled Plasma (ICP) suite.
- 47 sieved (106 micron) drainage sediment samples for analyses as above.
- 17.6 km of Induced Polarization (IP) survey.
- A total of 106,886 m of drilling in 398 holes, including 90,611 m of reverse circulation (RC) drilling in 348 holes and 16,275 m diamond (core) drilling in 50 holes.
- Analysis for gold and 27-element ICP on two-metre intervals for RC and one-metre intervals for core.

A total of 50 rock chip samples were collected from the Santo Domingo area and sent to ALS Chemex Laboratories in La Serena (ALS Chemex) for gold and 27-element ICP analyses. Samples with over 10 g Au and over 10,000 ppm Cu were assayed and bubble plots of copper and gold values produced. Samples were generally taken where copper oxides were apparent, and hence most samples contained anomalous levels of copper.

A total of 47 sediment samples were collected from drainages within and immediately peripheral to the Santo Domingo area. The samples were analyzed by ALS Chemex for gold and a 27-element ICP package. Most drainage channels in the area were sampled.

Approximately 200 g of -106 µm material was collected from each sample site using an Endecott No. 140 sieve (or equivalent) and simple bubble plots of copper and gold in sediments were produced. Drainages in the areas underlain by andesite flows, especially in the North and Northwest part of the target area, are

generally anomalous, with copper values typically in excess of 400 ppm. This broad anomaly is roughly coincident with the widespread distribution of Northwest trending specularite-copper oxide mineralized veins that cut the andesites. The highest copper value in drainage sediment (sample 7954) was 1,865 ppm from within the Santo Domingo area, approximately two kilometres east-southeast of the Estrellita mine. No associated bedrock mineralization is known.

Mineralization

Copper-bearing IOCG-type mineralization is widespread in the Santo Domingo area. Specular hematite and copper oxides (including chrysocolla, brochantite, and malachite) are the typical near-surface mineral assemblages. Copper oxides typically persist to 70 m to 90 m below surface, with chalcopyrite being the dominant copper mineral at greater depths.

Manto mineralization in tuffaceous or calcareous sediments is widespread on the property. In the Estrellita and Estefania areas, several gently north-dipping, strata-bound iron oxide (specular hematite near surface, grading to magnetite at depth) ± copper horizons, up to 12 m thick, occur in roughly the same 200 m stratigraphic interval, and have been tentatively traced with drilling or extrapolated across 3 km of strike length. Mineralization typically occurs within a simple single-phase breccia of fine-grained, calcareous tuffaceous sediment. The breccia matrix typically consists of fine-grained specular hematite with disseminated, stringer and fracture-coating copper oxides, and rare clots of chalcopyrite. Breccia horizons appear to be largely strata-bound, but to the south are discordant, following the steeply-dipping Santo Domingo fault, suggesting that this fault may have been a fluid conduit.

In the SDS deposit, copper mineralization occurs in a sequence of iron oxide mantos within a tuffaceous package between andesitic flows. Drilling has identified a 150 m to 500 m thick, mineralized sequence covering an area of approximately 1,300 m by 800 m. Mineralization consists of stacked chalcopyrite-bearing specularite-magnetite mantos, within tuff and tuffaceous sediments overlain by andesitic flows.

The Iris deposit is approximately 500 m wide, with a strike length of 1,600 m. The deposit consists of iron oxide mantos and breccias along a North-Northwest-striking fault zone. Mineralization occurs close to surface at the Southern end and plunges gently towards the North. The distribution of copper mineralization in the Iris deposit is more erratic and irregular than in the SDS deposit, owing to the fact that structural control seems to have played a greater role in the Iris deposit than in the more continuous stratiform replacement style mineralization at SDS. The dominating iron oxide at Iris is hematite, while the main copper mineral is chalcopyrite. There are some old mine workings at the southern end of the deposit where copper oxides such as brochantite and chrysocolla were mined at surface. The mineralization is hosted by a specularite manto that is cut by steeply-dipping structures. The extent of mineralization at surface is approximately 100 m by 60 m.

The Estrellita deposit is an East-West-striking, flat-lying to shallowly north-dipping tabular body lying approximately 3.5 km Northwest of SDS. The zone has been faulted into a series of four blocks which step downwards to the North, with displacement across the faults ranging up to approximately 75 m. The overall footprint of the zone measures 900 m long by 450 m wide, and is up to 100 m thick. The zone is thickest in the middle and narrows somewhat towards the periphery. There are narrower zones of limited lateral extent in the footwall of the main zone.

Mineralization at the Estrellita deposit is a mixture of manto-style iron oxide and structurally controlled vein style mineralization. The central part of the Estrellita deposit consists of a more or less horizontal tabular body of iron oxide manto that appears to have formed at the intersection of a horizontal and a steeply dipping set of specularite structures.

Drilling

Drilling has been conducted in the Santo Domingo area since May 2004. Far West has completed 348 RC drill holes in the target area for a total of 90,611 m and 50 diamond drill holes for a total of 16,275 m. As of May 31, 2010, drilling in the Santo Domingo area totalled 106,886 m in 398 holes.

Drilling was contracted to Harris y Cia., Major Drilling, Geo Operaciones and Captagua, all based in Chile. Most of the RC drilling was conducted by a truck-mounted Schramm Rotadrill, using a centre return hammer and a 5.5 in. (13.97 cm) carbide button bit. The diamond drilling was conducted by various types of equipment. HQ core (63.5 mm diameter) was typically drilled to a depth of approximately 300 m, below which NQ core (47.6 mm diameter) was drilled. Drilling was conducted in two 12-hour shifts per day. Samples, taken in two-metre intervals for RC, were collected by drilling personnel, and tagged and organized by Far West personnel. A Far West geologist was generally on site during most of the day shift for RC drilling.

Diamond drill core was sampled in one-metre (all DD holes before 2010) or two-metre (DD holes 2010) intervals that were marked by Far West geologists in order to adjust the samples to geological units.

Most holes are vertical as the orientation of mineralization at SDS and Estrellita is horizontal or gently dipping. Inclined holes, particularly diamond holes, were drilled in order to establish the limits of mineralization at the edges of the deposits as well as to establish the structural framework at Estrellita, Iris, and Iris Norte. Drill collars were located using a differential GPS. Coordinates are accurate to within one metre or less. Relative elevations between holes in close proximity (such as at SDS) were determined using a tight chain and clinometer.

Drill cuttings and core were logged using a set of codes similar to those used for surface mapping. All geological data were entered digitally into summary logs. All digital data (analyses and geological logs) were subsequently entered into an MS Access project database for presentation and section generation.

Sampling, Analysis and Security of Samples

Reverse circulation drill cuttings were blown into a cyclone and collected every two metres from top to bottom of each hole, regardless of lithology changes. This material was dumped directly into a riffle splitter with a bar separation of approximately one centimetre. Both parts of the initial split were reintroduced to the splitter and divided a second time to ensure adequate mixing of the entire sample. Half of this initial split was re-split and then split again.

These three consecutive splits resulted in a final sample one-eighth the size of the initial complete sample. A 2 kg to 3 kg portion of this final split was bagged and ticketed with a unique assay number, ready to be sent to the laboratory for analyses. A second sample of 3 kg to 4 kg was collected from the other half of the final split and stored (buried) at or near the drill site. This complete second set of samples can be used for confirmation assays, petrographic work, etc.

Observed sample recovery was excellent and no intervals with poor recovery were reported. Apart from most overburden material and a few obviously barren bedrock intervals, all samples were sent for analyses. Pre-laboratory sample preparation by Harris (drilling contractor) and Far West personnel was conducted under the supervision of Far West geologists. Samples were sealed in plastic bags using zip strips, subsequently sealed in woven polypropylene sacs, and stored in the drilling camp until collected by ALS Chemex personnel. Once leaving the drill camp on the property, sample security could not be confirmed. However, Far West advises that, in virtually all cases, copper estimates in logged chips correlate well with analytical results.

In the case of diamond drilling, core was placed into wooden core boxes by the drilling contractor at the drill. The depth of each interval of core pulled was marked on a wooden block and placed in the core box. The core was then transported to a logging facility by Far West personnel. At the logging facility, the core was photographed and a geotechnical log completed. Geotechnical data recorded included recovery, rock quality designation (RQD), fracture frequency, rock alteration and weathering, structure type, angle and roughness, joint compressive strength (JCS), and bulk density. Cut core samples with a length of 15 cm or 20 cm were also collected and stored in preparation for subsequent triaxial and point load tests.

The core was then geologically logged noting lithology, mineralogy, etc., using the same codes employed for logging of the RC cuttings. Structural information was also noted during core logging, something that was not possible for RC cuttings. Samples for assay were marked at one metre intervals by technicians, and subsequently adjusted by the geologist to correspond to major lithologic contacts. Sample lengths were not

less than 0.5 m, nor did they exceed two metres. Sampled intervals were cut in half along the drill axis using a diamond saw. Half of the sample was returned to the core box and stored at the core facility. The other half was bagged and shipped (via ALS Chemex truck) to the ALS Chemex laboratory at La Serena, Chile, for analyses.

Samples were shipped to ALS Chemex in La Serena, Chile, an independent commercial ISO 9001-certified laboratory. Upon arrival at the laboratory, samples were organized, recorded, and prepared for analyses using ALS Chemex's Prep-31 process. This process consists of:

- drying at 60°C;
- crushing (jaw crusher) to minus #10 Tyler >70%;
- homogenizing and splitting to 500 g with a Jones splitter;
- storage of reject material (over 500 g);
- pulverizing 500 g sample with a ring pulverizer to minus #200 Tyler >85%; and
- storage in 250 g envelopes.

All samples were analyzed for 27 elements using ICP. Samples were initially analyzed using ALS Chemex procedure ME-ICP61, which is ICP following four-acid total digestion (HF-HNO₃ - HClO₄ acid digestion, HCl leach) and more recently by ME-ICP81 (see below). Copper values over 10,000 ppm were assayed using ALS Chemex method Cu-AA62, which involved total digestion and an Atomic Absorption Spectroscopy (AAS) finish. Gold content was determined using method Au-AA24 (30 g sample, fire assay with an AAS finish). These analytical procedures conform to industry standards.

Drill cuttings and core were logged by Far West geologists. Data collected were entered into an MS Excel computer database. Each geologist was responsible for entering his/her own logs. Data from these individual "unproofed" logs were printed out, and then checked line by line against the original handwritten log by a two-geologist team. Corrections were made and a "proofed" version of the individual log saved. Each individual "proofed" geology log was then added to a "master geology" log. This master file can then be processed for further analysis and/or display by exporting the data in the required format.

A separate assay ledger is also kept for each hole. Initially, sample intervals and numbers are entered manually into the ledger and then transcribed into an MS Excel spreadsheet. The initial ledgers or logs are completed by the samplers at the drill for RC cuttings and at the core-logging facility for core. Inserted blanks, standards, and duplicates are also recorded in this ledger. Assay results, when available from the laboratory, are cut and pasted into the digital ledger from an MS Excel file provided by the lab. Once complete, data from the ledger are imported to a master MS Access database containing all the Candelaria Project drill assays.

One person is responsible for management of the database, posting of final results, and controlling user access.

Samples were collected at the drill in the case of RC and for the diamond drill holes, at the Far West logging facility in Diego de Almagro. The logging facility is fenced, locked when not occupied, and is secure. Samples are handled only by Far West employees or their designates (i.e., ALS-Chemex personnel).

An independent Quality Control/Quality Assurance (QA/QC) program was implemented by Far West to monitor the analytical results. Three types of quality control sample inserts were utilized during the drilling programs: (i) standards; (ii) blanks; and (iii) duplicates.

The QA/QC protocols have remained largely consistent throughout all of the programs conducted by Far West. Minor changes have been implemented to accommodate issues and recommendations from past programs, and to include the magnetic susceptibility measurements, which is a relatively recent addition to the assay procedures.

Certified Reference Materials (CRM), or standards, are inserted every 25th sample, constituting 4% of the total number of samples submitted. Standard samples are inserted into the sample sequence and analyzed by ALS Chemex in a normal way.

Mineral Resource and Mineral Reserve Estimates

The Santo Domingo Project currently comprises of the following deposits: Santo Domingo Sur (SDS), Iris, (currently grouped together as “SDS/IRIS”), and Iris Norte.

The mineral resource estimates for the SDS and Iris Zones have been updated by Scott Wilson RPA. The estimates include data from recent measurements of magnetic susceptibility, as well as 35 additional drill holes completed since the last estimate, which was carried out by Scott Wilson RPA in 2009. In addition to the 35 holes, five other holes were used in the geological interpretation, but not in the grade interpolation, as the assay results had not been received. The cut-off for the assay data was May 15, 2010, and the estimate is considered to be current to that date.

Santo Domingo - Mineral Resource Estimate (Effective May 15, 2010)

Zone	Mt	%CuEq	%Cu	g/t Au	%Fe
Indicated					
SDS (1-4)	275	0.64	0.41	0.056	27.8
Iris (5-6)	111	0.50	0.23	0.033	26.3
Iris Norte (7-8)	99.5	0.47	0.16	0.019	26.4
Indicated (SDS/Iris)	486	0.57	0.32	0.043	27.2
Estrellita*	31.7	n/a	0.53	0.050	n/a
Total Indicated	517		0.33	0.044	
Inferred					
SDS (1-4)	30.5	0.46	0.26	0.037	23.7
Iris (5-6)	5.52	0.47	0.19	0.026	26.0
Iris Norte (7-8)	25.3	0.47	0.10	0.011	27.9
Inferred (SDS/Iris)	61.3	0.46	0.19	0.025	25.7
Estrellita*	2.7	n/a	0.48	0.050	n/a
Total Inferred	64.0		0.20	0.026	

Notes:

- (1) CIM definitions were followed for mineral resources.
- (2) Mineral resources for SDS/Iris are estimated at a cut-off grade of 0.25% CCQ per equivalent (“CuEq”). The cut-off for Estrellita was 0.3% Cu.
- (3) CuEq grades are calculated using average long-term prices of \$2.25/lb Cu, \$950/oz Au and \$0.74/dmt Fe (\$50/dmt conc. @ 67.5% Fe).
- (4) Cu Equivalence calculations are as stated in the text of this document.
- (5) Metallurgical recovery factors were applied as described in this document.

*The Estrellita Zone, which was estimated in 2007, was not included in the 2010 update as there has been no change to the database for this deposit.

Based on the analysis of a Whittle™ pit optimization evaluation for varying revenue factors the chosen Whittle™ shell was used as the basis for the detailed pit designs created for each of the Santo Domingo pits. These detailed pit designs take into consideration, minimum mining widths, access ramps, and detailed bench configurations.

The mineral reserves estimate for the detailed open pit designs are summarized in the following table for the probable reserve classification. The Santo Domingo Sur and Iris deposits formed the SDS/Iris open pit with Iris Norte forming its own pit. These open pits were then further divided into various stages for mine planning purposes. SDS/Iris pit is divided into four stages, while Iris Norte has been divided into three stages.

Santo Domingo Open Pit Probable Mineral Reserves

Stage	Ore (Mt)	Ore Grade		Contained Metal		
		Au (g/t)	Cu (%)	Au (kOz)	Cu (Mlbs)	Magnetite Conc. (Mt)
SDS/Iris						
SDS Stage 1	71.8	0.08	0.61	193	958	11

Stage	Ore (Mt)	Ore Grade		Contained Metal		
		Au (g/t)	Cu (%)	Au (kOz)	Cu (Mlbs)	Magnetite Conc. (Mt)
SDS Stage 2	63.7	0.06	0.41	113	574	10
SDS Stage 3	170.5	0.03	0.23	173	848	32
SDS Stage 4	38.8	0.05	0.36	60	304	3
Subtotal SDS/Iris	344.8	0.05	0.35	539	2,684	57
Iris Norte						
IRN Stage 1	21.4	0.03	0.23	20	108	4
IRN Stage 2	28.0	0.01	0.13	12	78	7
IRN Stage 3	23.7	0.01	0.11	8	60	5
Subtotal Iris Norte	73.1	0.02	0.15	41	246	17
Grand Total	418.0	0.04	0.32	580	2,930	73

Notes: NSR cut-off of \$5.79/t (incremental operating cost; does not include mining costs). Reserves based on Indicated Resources only. Magnetite concentrate tonnage based on average 65% iron grade. Due to rounding, some figures may not add up to the totals shown.

Within the pit designs there is a total of 8 Mt of inferred mineral resources. These inferred tonnes were not included in the life-of-mine production plan. There is no certainty that these inferred mineral resources will be converted to the measured or indicated categories through further drilling, or into mineral reserves, once economic considerations are applied. There is also 31 Mt of oxide material that has not been included in the life-of-mine plan. This oxide material will be selectively placed on the waste rock fill to allow for potential processing in the future.

Mining Operations

The mining sequence, which mines higher grade material early on in the schedule, begins with Santo Domingo Sur. Mining of the Santo Domingo Sur Pit will be followed by Iris, with Iris Norte mined last in the sequence. Santo Domingo Sur and Iris form one of the pits and is divided into four stages. Iris Norte forms a separate pit and has been split into three stages.

The production schedule for the Santo Domingo deposits was developed with the aid of MineSight™ software, and incorporated the open pit deposits at Santo Domingo Sur, Iris and Iris Norte. The maximum processing rate of 70 ktpd was used in the schedule.

Open pit mining will take place sequentially with Santo Domingo Sur mined first, followed by Iris and finally Iris Norte. There will be some overlap between these pits in order to provide adequate mill feed and to balance waste stripping requirements. The average maximum production rate from the Santo Domingo open pits is approximately 285 ktpd. Only indicated mineral resources were used in the LOM plan.

The Santo Domingo open pits will produce 418 Mt of mill feed and 1,277 Mt of waste rock over a 19-year mine operating life (yielding an overall strip ratio of 3.1:1 (t:t)). The mine schedule focuses on achieving the required plant feed production rate, mining of higher grade material early in schedule, while balancing waste stripping requirements.

To further illustrate the progression of mining of the Santo Domingo deposits, the following provides the open pit stage bottom elevation reached by the end of each period:

Year	Development
Year -1	Pre-stripping of the SDS/Iris pit commences with a total of 0 Mt of waste material mined. Approximately 0.4 Mt of ore will be stockpiled.

Year	Development
Year 1	Mining continues in Stage 1 and 2 of SDS/Iris. Open pit ore production is planned to be 15.3 Mt at a strip ratio of 5.8:1 (total waste mined 90 Mt). Processing of ore commence at 60% of maximum capacity. Mined head grade is 0.63% Cu.
Year 2	Stages 1 and 2 in SDS/Iris produce 81 Mt of waste for a 3.2:1 strip ratio. Average total mined grade is 0.63% Cu. Processing rate reaches maximum of 70 kt/d.
Year 3-5	Stage 1 of SDS/Iris is completed. Mining continues in Stage 2 and commences in Stage 3. Processing mill head copper grade averages 0.49% Cu at a constant throughput rate of 70 kt/d. Average total material mined is 288 kt/d at an average strip ratio of 3.1:1.
Year 6-10	Stage 2 of SDS/Iris pit is completed during this time frame, along with continued mining in Stage 3 and 4. Mining commences at Iris Norte with pre-stripping of Stage 1. A total of 122 Mt of plant feed mined in the period at an average copper grade of 0.27% Cu. Total waste tonnage is 399 Mt for an average strip ratio of 3.3:1.
Year 11-15	Stage 3 of SDS/Iris is completed with Stage 4 of SDS/Iris nearing completion. All stages in Iris Norte are active during this time period
Year 16-19	Mill feedhead grade averages 0.24% Cu. The strip ratio averages 2.8:1 with 322 Mt of waste mined. Mining completed in remaining Stage 4 of SDS/Iris and three stages in Iris Norte. 65 Mt of ore mined and mill head grade decreases to 0.15% Cu with a total of 98 Mt of waste mined.

Waste rock from the various open pits at Santo Domingo will be deposited in engineered waste rock facilities (“WRF”) adjacent to each of the deposits. In addition, a portion of waste rock from Iris Norte is proposed to be backfilled into the mined out Iris pit. The 31 Mt of oxide material will also be placed in these WRF to allow for potential future processing of this material.

The tailings storage system consists of a TSF located north of the proposed mine. The TSF is designed to store approximately 353 Mt of conventional thickened tailings, enough for approximately 18 years of the project life. Storage of both fresh and seawater is proposed to be in lined ponds near the plant site. No other water storage reservoir is proposed. Water make-up is proposed to be untreated seawater. Based on the conventional thickened tailings disposal method, the estimated water make-up will be approximately 1,450 m³/h (~400 L/s). The TSF includes a starter dam for storing at least two years of thickened tailings. The starter dam crest will be raised in stages by the downstream method to contain the waste tailings within the current permitted boundary limits up to Year 18 of operations.

Basic layouts have been prepared based on an open-air concentrator design, with mobile crane maintenance access and minimal overhead cranes. This layout has taken account of the site topography and limits imposed by the preliminary locations of the pit, stockpiles, and waste dumps.

The land and territory investigations regarding the project’s current footprint, indicate there would be no impact on natural parks, biodiversity conservation priority sites, or indigenous development land in the Atacama Region. A series of baseline studies are still required for the project in order to achieve a proper characterization of the environmental components that should be included in the future Environmental Impact Study (EIS).

No direct marketing has been done for the potential Santo Domingo copper concentrates and therefore no further off-take agreements exist. Based on current industry demands it is envisioned that the copper concentrates would be best suited for smelters in Asia, namely, Japan, Korea, India or China. There is the potential for the sale of concentrate to Chilean smelters such as Las Venatanas, however, these options will be reviewed in detail when the project proceeds to the feasibility stage.

The iron ore produced by the Santo Domingo Project will be suitable to be sold as a pellet feed. A series of assumptions can be made around which the specific price forecast can be based.

- Market: the product will be sold into China as a pellet feed, most likely to one of the new world scale coastal pellet plants operated by the larger steel companies.
- Logistics: as a large bulk shipment it can be presumed that a Chinese steel mill will use a 155,000 capesize vessel to transport the ore from Chile to a port in Northern China, most likely Qingdao, a distance of 10,376 nautical miles. In this instance it is almost certain that any price negotiations will be based upon the steel company using a ship under a time charter agreement; the reason for a COA or owning a ship is to give the steel mill a freight advantage, this will not be ceded in price negotiations.
- Pricing point: The large coastal pellet plants in China, which are most likely to purchase the ore from the project, will value it against pellet feed from the major supplier of imported material, in this case Brazil. Therefore, the correct benchmark price to be used will be Vale's MBR pellet feed price (fob Tubarao). The MBR pellet feed price is typically set at a 3% discount to sinter fines and this is unlikely to change in future. There is an argument to price directly against a Chinese concentrate price series, but the market for this type of product is small and in practise restricted to inland steel mills.

The total project capital cost estimate is summarized in the table below and have $\pm 25\%$ accuracy as of July 2011. The estimate is based on a foreign exchange rate of 1 US\$ = 466 Chilean Pesos (CLP) and must be assessed against the study battery limits, exclusions and scope as detailed in the relevant sections of the Santo Domingo Report.

Summary of Capital Costs

Area	\$M
Mining equipment	172
Pre-strip	54
Process plant	283
Tailings	29
On-Site Infrastructure	27
Off-Site Infrastructure	
Site Power	6
Concentrate Pipeline	49
Seawater Pipeline	76
Concentrate Dewatering, Storage and Load Out	121
Off-Site Infrastructure (Total)	253
Total Direct Costs	818
Indirect Costs	186
Owners Cost	89
Total Indirect Costs	275
Contingency	149
Total Project Cost	1,242

The total project operating costs, excluding costs associated with concentrate sales, are summarized in the table below. The costs are presented as life-of-mine (LOM) averages per tonne of ore processed.

Summary of Average LOM Operating Costs

Cost Centre	\$M/a	\$/t ore
Mining	107	4.62
Process plant	101	4.37
Concentrate pipeline	2	0.09
Seawater pipeline	10	0.43
G&A	13	0.55
Port Facility	11	0.46
Total	244	10.52

The operating costs estimate was prepared with a base date of July 2011 to an accuracy level of $\pm 25\%$. Life of mine sustaining capital costs, estimated at \$495 million over the 18 year mine life (including mine closure estimates) are not included in either the initial capital or operating cost figures above. The sustaining capital expenditure requirements have been included as part of the financial model.

The overall economic performance of the project (as measured by the IRR, NPV and payback period) is summarized in the table below. Base case and spot price economic models were developed. These models were based on the commodity prices, and operating and capital costs listed below.

Summary of PFS Economic Results

Parameter	Base	Spot
After Tax NPV 8% discount rate IRR, Payback	\$1.1 billion / 22% / 3.0 years	\$4.0 billion
Base Copper price, US\$/lb	2.50	4.00
Base Magnetite price, US\$/dmtu Fe ¹	1.00	2.00
Base gold price, US\$/oz	1,000	1,400
Base capital cost, US\$M	1,242	
Site Operating Cost, US\$M	4,403	
Sustaining capital cost, US\$M	495	
Realisation Costs, US\$M	1,091	

Note 1: \$1.00/dmtu Fe is the equivalent of \$65/dmt of concentrate at 65.0% Fe and \$2.00/dmtu Fe is the equivalent of \$130/dmt of concentrate.

The total cash production costs for copper over the life of the project are estimated at \$0.11 per pound of payable copper, when including gold and iron production as credits and selling costs. The co-product total cash production costs are estimated at \$1.12 per pound of payable copper and \$30.46 per tonne of magnetite concentrate.

A project implementation schedule has been developed for a feasibility study (FS) and test work phase followed by engineering, procurement and construction management (EPCM) of the process plant, related facilities, and prescribed infrastructure. The plan includes environmental baseline studies and the preparation of the EIS and permitting process.

The plan is based on the successful completion of an integrated test work program and FS. Due to the advanced nature of the Santo Domingo test work, the FS can commence in parallel or slightly ahead of the test work program and still allow the results to be incorporated in the study.

The critical path on the PFS schedule is the completion of the EIS to allow permitting to be completed to obtain access to site for construction of the mills and the concentrate and sea water pipelines. The proposed duration from the development of the EIS and award of the mining permit is approximately 112 weeks. This process is scheduled to commence in January 2012.

The critical, long-lead items for development of the plant are the grinding mills. SAG and ball mills delivery is currently forecast to be 85 weeks from manufacture to delivery at port of export. The commencement of plant engineering activities currently allows six months float time due to the duration EIS process to obtain access to site.

The schedule indicates an overall duration of approximately 230 weeks from the commencement of environmental monitoring (begun August 2011) through to the completion of commissioning in December 2015. This schedule does not incorporate any contingency. However, several opportunities have been identified to potentially shorten the schedule by undertaking parallel works or pre-ordering equipment.

Exploration and Development

The Feasibility Study for the Santo Domingo project was initiated in January 2012. The study will focus on more detailed design for the project and is scheduled to be completed before the end of 2012.

Exploration on the property will focus on identifying small lenses of potential high grade material. Previous exploration has been focused on identifying and delineating the main ore body which is now complete. Additional small high grade lenses will potentially improve the economics of the overall project.

D. Kutcho Project (British Columbia)

A report titled "Kutcho Copper Project, Prefeasibility Study, British Columbia" dated February 15, 2011 (the "Kutcho Report") was prepared by JDS Energy & Mining Inc. The Kutcho Report was written by: Michael Makarenko, P.Eng. of JDS Energy & Mining Inc.; Ali Sheykhosslami, P.Eng. of JDS Energy & Mining Inc.; Garth Kirkham, P.Geo. of Kirkham Geosystems Inc.; Hoe Teh, P.Eng. of Hoe Teh Consulting Inc.; Guangwen (Gordon) Zhang, P.Eng., EBA Engineering Consultants Ltd.; Carlos Chaparro, P.Eng., EBA Engineering Consultants Ltd.; Dan Jarratt, P.Eng., Allnorth Consultants Ltd.; David Archibald, B.Sc., MBA, R.P. Bio., Allnorth Consultants Ltd.; Frank Palkovits, P.Eng., Mine Paste Engineering Inc.; and Brad Mercer, P. Geo., Capstone Mining Corp., each a qualified person as defined in NI 43-101. The Kutcho Report is available in its entirety on SEDAR at www.sedar.com under the Company's profile.

Project Description and Location

The Kutcho Project is approximately 100 km East of the Town of Dease Lake in Northern British Columbia. The geodetic coordinates for the center of the claim area are 58°12'N and 128°22'W. The UTM coordinates for the centre of the Main deposit are approximately 537500E and 6452000N. The project area contains 37 mineral claims covering an area of 11,997.6 hectares.

Kutcho Copper owns the claims through two separate purchase agreements and through claim staking. One agreement is with Barrick Gold Inc. (a subsidiary of Barrick Gold Corporation) and AMI Resources Inc., who had 80% and 20% ownership, respectively, in all of the claims except the 16 SMRB claims and the 30 KC claims. The other agreement is with Sumac Mines Inc., a subsidiary of Sumitomo Metal Mining Co. Ltd. In 2008, Kutcho Copper staked 11 claims.

Following notice by Kutcho Copper that it has completed a feasibility study on the Kutcho Project, Barrick will have 120 days to elect to 'back-in' for a 50% interest by spending, within two years, three times Kutcho Copper's expenditures on the property. This applies only to that portion of the property on which Barrick previously held an interest.

Pursuant to the agreement with Sumac, Sumac is entitled to a royalty of 2% of net smelter returns, on the portion of the Kutcho Project it sold to the Company, between the third anniversary and the sixth anniversary of the date of commencement of commercial production, and a royalty of 3% of net smelter returns after the

sixth anniversary of the date of commencement of commercial production.

Barrick and AMI are collectively entitled to royalty of 2% of net smelter returns on the portion of the Kutcho Project they sold to the Company, which royalty is shared between Barrick and AMI on an 80/20 basis, respectively.

Kutcho Copper currently holds exploration permits for the project.

Accessibility, Climate, Local Resources, Infrastructure and Physiography

The Kutcho property is located approximately 100 km east of Dease Lake, British Columbia. Dease Lake is a community of about 650 people and has basic services such as an airstrip, medical clinic, school, restaurants, college extension campus, grocery store and hotels. The Dease Lake area offers a pool of potential project employees that would be supplemented with people from outside the region.

Dease Lake is reachable via a good all weather road, Highway 37 North, from Smithers (600 km to the South) and Watson Lake (250 km to the North). Dease Lake is 400 km from the port of Stewart. A marginal, seasonal road runs to the property but is only suitable for summer access with special equipment (SRK 2008).

Access to the property is by fixed-wing aircraft and helicopter from Smithers or Dease Lake, landing at the 900 m gravel airstrip located at the junction of Kutcho and Andrea Creeks. The deposit area of the property is connected to the airstrip by a 10 km road. Currently this road has had culverts removed and is only passable to four-wheel drive trucks with good ground clearance. Four-wheel drive vehicles have access to the property via the road to Dease Lake during the late summer and early fall, but this access is weather-dependent due to extensive muddy sections.

The property is located within the Cassiar Mountains, just to the North of the continental divide between the Arctic and Pacific watersheds. The area is moderately rugged with elevations ranging from 1,400 to 2,200 metres. Most of the area is alpine with tree line at approximately 1,500 metres. Snow cover can persist for nine months of the year, particularly on shady North facing slopes. Winters are cold and dry, while summers are cool and moist (Wardrop 2007).

Dease Lake, the nearest government weather station, gets about 0.25 m of rain and over 2 m of snowfall annually (SRK 2008).

The starter pit, underground mine, dry tailings storage area, workshop, plant site and camp accommodation complex are all planned to be located within an area outlined by Andrea, Sumac and Playboy Creeks. A conceptual site plan is shown in the figure at the end of Section 19. Power will be generated at site with diesel generators. Water sources for the project have not been defined but possible options include run-off collection, wells and dewatering from underground and drawing from creeks.

History

Mineralization on what was to become the Kutcho property was first discovered in 1968 by a joint venture exploration operated by Imperial Oil Ltd. Twenty claims were staked by W. Melnyk directly over the as of yet undiscovered main Kutcho sulphide deposit. These claims were allowed to lapse when the other partners in the joint venture declined to fund further exploration. After the statutes of the joint venture agreement expired, Imperial Oil returned to the area in 1972 in order to re-stake the area. However, Sumac Mines Ltd. (Sumac) had conducted stream sediment sampling earlier that season, and in response to anomalous samples R. Britten staked eight "two-post" claims along the anomalous stream and eight more claims along the geological strike direction, resulting in the cruciform claim outline overlying the western part of the main Kutcho sulphide deposit. Imperial Oil (later becoming Esso Minerals Canada Ltd.) staked a much larger area encompassing Sumac's claims.

Beginning in 1973 both Sumac and Esso carried out exploration work, and their early successes prompted additional staking which resulted in claim boundaries roughly as they are today. Diamond drilling

commenced in 1974, and by 1982 approximately 60,000 metres had been drilled by both companies, defining three sulphide lenses. During this time Esso also drilled a number of exploration targets in other areas of the property with moderate success.

Environmental, metallurgical, and engineering studies were begun by both groups in 1980. A partnership agreement on engineering and development work was signed by Esso and Sumac in 1983, made retroactive to 1981 (the year Sumac began work driving the adit in order to collect a 100 tonne bulk sample). The agreement was essentially a 50/50 joint venture for development work, and culminated in a prefeasibility study by Wright Engineers Limited in 1985. This study indicated an 11% internal rate of return when using a copper price of \$0.95/lb. Given the risk factors involved and long-term price projections for copper below the \$0.95/lb level, the companies put the project on hold pending further exploration results. A limited amount of exploration work was done on Esso's claims to the south of the main mineralized trend between 1985 and 1988; however, this work and the numerous geophysical surveys that had been undertaken indicated limited potential for additional open pit mineralization.

In 1989, Esso sold most of its mining assets to Homestake Canada Ltd. (Homestake). In 1990, Homestake optioned the Kutcho property to American Reserve Mining Corporation (ARMC), who funded a \$1.1 M exploration program (Homestake remained the operator) which included 7,031 m of drilling in 28 holes, mostly in outlying target areas (Homestake remained the operator, thereby earning a 20% interest). ARMC carried out engineering studies but did no further exploration work, relinquishing the option in 1993 while retaining a 20% interest in Homestake's property. The property was optioned to Teck Cominco Ltd. (TCL) in 1992. TCL carried out deep penetration EM geophysical surveys (UTEM) over the Esso West Zone with the goal of defining additional conductors along the Kutcho trend. Due to extensive cover of conductive argillaceous units in the hanging wall, the UTEM system was unable to detect the Esso West deposit or other conductors at depth, leading TCL to drop their option.

Homestake was purchased by Barrick Gold Corp. (Barrick) in 2003. Extensions of the Kutcho stratigraphy to the west have been staked and worked by various companies in the past. Shortly after the discovery of the Kutcho deposits, Noranda staked the Kutcho formation to the west of Kutcho Creek. Noranda conducted geophysical surveys and carried out a small drilling program.

The claims were allowed to lapse and were re-staked in 1995 by Gary Belik. Mr. Belik carried out a detailed mapping program and optioned the claims to Atna Resources Ltd. (Atna) in 1997. Atna conducted UTEM geophysical surveys and an extensive drilling program. Results of Atna's work were mixed, and although no deposits were discovered, significant weak to moderately mineralized alteration zones were intersected. Structural complexity and lack of clear geophysical targets prevented additional work and the option was terminated.

Negotiations by Western Keltic Mines Inc. (WKM) to purchase the property from Barrick and Sumitomo were initiated in 2003 and concluded in early 2004. WKM carried out diamond drilling within the Main and Esso deposits during 2004 to confirm historical results and obtain material for metallurgical studies. A second round of drilling by WKM in 2005 tested the Main deposit's potential for up-dip and down-dip extensions, as well as Western extensions to the Esso deposit. The Sumac deposit was also drilled in 2005 to test for higher grade zones. A third round of drilling in 2006 focused on infill drilling within the five-year pit area of the Main deposit. The Kutcho property was entered into the Mine Development Review Process in 2006 and Environmental Assessment (EA) studies were initiated to provide baseline data for Provincial and Federal EA reviews.

In February 2008, Sherwood acquired 93% ownership in Kutcho Copper Corp., owner of the Kutcho property. On May 27, 2008 Sherwood acquired 100% ownership in WKM by amalgamating WKM with a subsidiary so that Kutcho Copper Corp. now owns the Kutcho property. On November 27, 2008, Sherwood amalgamated with Capstone under a plan of arrangement that resulted in Kutcho Copper being a wholly owned subsidiary of Capstone. KCC embarked upon a program of diamond drilling of 78 holes (81 holes were collared but three were abandoned due to technical issues) for a total of 9,905 metres of HQ size drill core.

In 2011, compilation of the Environmental Application and Consultation with First Nations commenced with the objective of submitting permit applications in 2012.

Geological Setting

The Kutcho property lies within the King Salmon Allochthon (KSA), a narrow belt of Permian Triassic island arc volcanic rocks and Jurassic sediments, sandwiched between two northerly-dipping thrust faults: the Nahlin fault to the North, and the King Salmon fault to the South. Penetrative foliation and axial planes of major folds are parallel to these east-west trending bounding faults. The belt of volcanic rocks is thickest in the area where it hosts the volcanogenic massive sulphide (VMS) deposits, partly due to primary deposition, but also to stratigraphic repetition by folding and possibly thrusting. The KSA is terminated to the east (near the Eastern edge of the property) by the Kutcho strike-slip fault (Gabrielse, 1978), but extends to the West for hundreds of kilometres. However, Kutcho Formation rocks thin to the West, and do not occur or are rarely exposed 10 km to the West of Kutcho Creek. Stratigraphy of the KSA consists primarily of the Kutcho Formation, which is overlain by the limestone of the upper Triassic Sinwa Formation, which in turn is overlain by sediments (predominately argillite) of the Lower Jurassic Inklin Formation. Major folds are delineated by the Sinwa limestone and, where the Sinwa is absent, by the contact between the Kutcho and Inklin Formations (Wardrop, 2007).

Exploration

Kutcho Copper completed a diamond drill program in 2008. On April 28, 2008, an infill program of diamond drilling commenced on the Main Deposit resulting in substantive changes in the Main Deposit Mineral Resource estimate.

A total of approximately ten thousand (9,905) metres of HQ size core was drilled in 2008 by 669856 BC Ltd., doing business as SCS Diamond Drilling, of Kamloops, British Columbia. The drill contractor was under the direct supervision of KCC personnel who were also responsible for supervising temporary employees and contractor geologists in core logging, sample collection, sample preparation, QA/QC programs and preparation of sample shipments to various analytical facilities for either assay or metallurgical testing.

The principal objectives of the 2008 drill program were to:

- Infill gaps in previous resource drilling programs and enlarge the assay database;
- Better define and test higher grade trends for expansion within the Main Deposit;
- Demonstrate grade continuity in order to support a better resource classification;
- Provide material for extensive metallurgical testing that will relate to a revamped mine plan;
- Provide geotechnical information for mine design and for assessment of infrastructure locations; and
- Provide information to support project permitting activities and to develop a mine closure plan.

The program was designed principally to increase the assay sample density and to provide material for further metallurgical and environmental testing. The drill program in-filled on earlier work that had already defined the gross limits and overall geometry of the mineralized zone and as expected did not result in a material change to these limits or the geometry of the resource model, but it did better define higher grade trends within the deposit and provided more confidence in, and thus increased, the classification levels for this new mineral resource estimate.

Kutcho Copper completed a diamond drill program in 2010. On July 3, 2010, a program of infill and step-out drilling commenced on Esso deposit which generated significant changes in the Mineral Resource Estimate of Esso deposit.

A total of 17,970 metres of HQ size core was drilled in 2010 by Driftwood Diamond Drilling Ltd., located in Smithers. The drill contractor was under the direct supervision of KCC personnel who were also responsible for supervising temporary employees and contractor geologists in core logging, sample collection, sample preparation, QA/QC programs and preparation of sample shipments to various analytical facilities for either assay or metallurgical testing.

The principal objectives of the 2010 drill program were to:

- Test selected undrilled perimeter areas to expand the size of the Esso deposit;

- Infill gaps in previous mineral resource drilling programs at Esso and enlarge the assay database;
- Better define and test higher grade trends for expansion within Esso Deposit;
- Demonstrate grade continuity at Esso in order to support a better mineral resource classification;
- Provide material for extensive metallurgical testing at Esso that will relate to a mine plan;
- Provide geotechnical information for mine design and for assessment of infrastructure locations; and
- Provide information to support project permitting activities and a mine closure plan.

The 2010 drill program was designed principally to increase the assay sample density and to provide material for further metallurgical and environmental testing related to the Esso deposit. Most drill holes in-filled on earlier work that had already defined the gross limits and overall geometry of the mineralized zone at Esso and, as expected did not result in a material change to these limits or the geometry of the resource model. The 2010 program better defines higher grade trends within the deposit, eliminates an internal gap in the mineral resource model at the west end of Esso deposit and provides more confidence in, and thus increases, the classification levels of the new mineral resource estimate.

Kutcho Copper completed a property wide VTEM survey conducted by Geotech Ltd. from April 8 to 19, 2011. The survey consisted of 1,649.4 line-km (plus tie-lines) covering a 147.2 km² area; the survey grid was oriented along flight line with azimuth 004 degrees, perpendicular to the strike of the hostrock strata in the deposit area. Compared to the two previous historic airborne EM surveys conducted on the property, the 2011 survey offered a significantly greater depth penetration (up to 750 m), potential to see through the conductive overburden higher in the stratigraphy, and the generation of precisely located drill-ready EM targets that did not require follow-up ground surveys. The survey identified 19 target zones (EM anomalies) for follow-up drilling.

Subsequently, Kutcho Copper completed a third diamond drill program in 2011 designed to test high-priority targets generated by the VTEM survey. Nine of the 19 targets identified by the VTEM survey were effectively drill tested in 20 drill holes. In addition, four water monitoring wells were completed downslope of the proposed tailings storage area, and two deep water flow test wells were completed (one at the Main deposit, one at the Esso Deposit) in support of permitting activities.

A total of 4,944.8 metres of HQ/NQ size core was drilled in 2011 by Driftwood Diamond Drilling Ltd. of Smithers, BC. The drill contractor was under the direct supervision of Kutcho Copper personnel who were also responsible for supervising temporary employees and contractor geologists in core logging, sample collection, sample preparation, QA/QC programs and preparation of sample shipments to various analytical facilities for either assay or metallurgical testing.

The conclusions of the 2011 exploration program are:

- Of the nine VTEM targets drill-tested, one yielded multiple thick drill intersections of polymetallic VMS mineralization; this drilling identified that the Sumac massive sulphide deposit extends further south, further east, and further up-dip than previously recognized.
- For the remaining VTEM targets drill-tested, drill holes intersected either lower-grade stratabound (syngenetic) pyrite horizons or significant horizons of graphitic mudstone which are interpreted as the source of the EM anomalies in those areas.
- In addition to the expected strong EM response over the Main deposit, the VTEM system was able to detect anomalous responses over the east end of Sumac deposit and along the up-dip edge of the Esso stratigraphic horizon. Respectively, these represent significantly deeper levels of penetration and higher levels of sensitivity than previous airborne EM systems used on this property.

Mineralization

There are three known deposits that comprise the Kutcho Project and form a Westerly plunging linear trend. From East to West, the deposits are termed the Main (previously known as Kutcho), Sumac, and Esso deposits. The Main deposit comes to surface at its Eastern end, whereas the Esso deposit occurs at depths about 400 m below surface.

The Main deposit has an elliptical, lenticular shape with approximate dimensions of 1,500 m long, 260 m wide (down-dip), and 36 m maximum thickness. The long axis of the deposit plunges to the west at about 12°, just slightly less than the regional fold axes. The deposit is conformable with stratigraphy, dipping moderately to the North. There is a gentle warping of the deposit, such that the dip of the deposit changes from East to West and North to South. The shallowest dip (about 38°) occurs at the Southeastern edge and becomes progressively steeper (to about 63°) at the Northwestern edge. In general, the up-dip edge of the sulphide lens is narrow and pinches out, whereas the down-dip edge is thicker and interlayered with tuffaceous rock, giving the deposit an approximate flattened arrowhead shape.

The Sumac deposit has not received much attention historically, due to its relatively low grades. The shape of the deposit is primarily taken from contours generated by a chargeability geophysical survey carried out during the mid-1980s. A total of 14 drill holes at 100-200 m spacing define the Sumac deposit. Better intercepts include 1.45% Cu, 2.56% Zn, and 23.7 g/t Ag over 26.1 m, and 1.37% Cu, 1.9% Zn, and 26.2 g/t Ag over 23.4 m.

The Sumac deposit is nearly (but not quite) continuous with the Esso deposit (across the historical property boundary), but sits within a local depression relative to the Main and Esso deposits.

An additional four drill holes were completed in the Sumac deposit in 2005 by WKM. These holes, drilled in the Western part of the deposit, provided two of the best intersections within the deposit and helped establish the Western end of the deposit. Reinterpretation of the Sumac drill data suggests that the core of the deposit has a much steeper plunge than previously suspected, indicating that historical drilling in the deposit's Eastern end was likely too deep and opening up more area for test drilling. The Sumac deposit is finely banded but massive and competent, and has the highest sulphide content (+90%) of the three deposits. Alteration of the host stratigraphy around it is very similar to that of the other two deposits.

The Esso deposit lies between 400-550 m below the surface. It was discovered by following down plunge, the Westward trend of mineralization beyond the Main and Sumac deposit areas. The Esso deposit has an elongate lens shape with a strike length of approximately 640 m, a dip direction of 240 m and is up to 21 m thick but averages approximately 12.2 metres thick. As a result of the 35 drill holes completed in 2010 the Esso deposit is now drilled off on approximately 50 m centres; allowing reclassification of the entire Mineral Resource for Esso into the Indicated Category.

Minor changes along the deposit edges are possible with additional drilling, but these would not be significant with respect to tonnage, grade, or mine planning.

Drilling

Drill collars and claim locations were surveyed periodically during exploration programs by McElhanney Engineering Services Limited (MESL) until 1983; all later WKM drill holes and many of the historical drill holes were surveyed or resurveyed by MESL in September 2006.

Initial drilling in the Main deposit was carried out on 120 m spaced sections with drill holes spaced approximately 60 m along section lines. This spacing was subsequently reduced to approximately 30 m spaced drill intersections along 60 m spaced sections, and recently WKM has been reducing the drill spacing in selected areas to 30 m or less. Historical drill hole diameters are mostly BQ (38 mm) and recoveries were generally very good with only rare core loss in minor fault zones. The more recent drilling has been a combination of HQ and NQ in the Main deposit and NQ (or BQTW in wedge branches) within the Sumac and Esso deposits. Most holes were drilled at -45° to -60° in order to intersect mineralization at close to 90°. Due to strong foliation dipping to the North, even vertical holes tend to flatten and cut the mineralization roughly perpendicular to its dip.

The historical drill hole database for the Main deposit contained assays for copper, zinc, silver, and specific gravity (SG), with most holes containing assays for gold and approximately 60% containing assays for sulphur. Historical drill data for the Sumac and Esso deposits contain results for copper, zinc, silver, gold, and specific gravity. There are 4,569 assay intervals within the total resource database, of which 1,589 are new (WKM). Of the remaining 2,978 historical assay intervals, 2,061 are in the Main deposit, 443 from the

Esso side of the deposit, and 1,618 from the Sumac side. The assay intervals were generally longer on the Esso side, while the Sumac data commonly contained shorter intervals based on sulphide mineralogy.

The 2008 drill program was designed to infill the Main Deposit resource area, principally to increase confidence in the resource classification, better define higher grade trends and provide sufficient sample material to conduct more extensive metallurgical sampling in support of a mine plan. In addition to 1/4 cylinder core samples taken for assay, a further 1/2 cylinder sample was cut and sealed in nitrogen-filled bags and stored in nitrogen filled pails for stable storage in an oxygen deprived environment for later metallurgical testing. Three metallurgical tests of this large sample set have been completed and testing continues. Another aim of the 2008 program was to increase the overall pierce-point density to a nominal 30 m x 30 m grid in the parts of the deposit that have a reasonable expectation of economic extraction based upon previous mine plans and assuming a positive feasibility study.

Most new exploration holes were drilled on an azimuth of 180° or as close as possible and range in length from 59 m to 207 m, with inclinations ranging from -90° to -45° but averaging between - 60° to -45°. This typical inclination ensures that most mineralized intercepts are, at or as near to, perpendicular to the enveloping hanging wall and footwall surfaces as possible and therefore the mineralized intercept can be expected to be, at or close to, true width.

The 2010 drill program was designed to infill the Esso Deposit resource area and to test its perimeter, principally to increase confidence in the resource classification, allow reclassification of the Inferred resource, better define higher grade trends, and provide sufficient sample material to conduct more extensive metallurgical sampling in support of a mine plan. In addition to 1/4 cylinder core samples taken for assay, a further 1/2 cylinder sample was cut and sealed in nitrogen-filled bags and stored in nitrogen filled pails for stable storage in an oxygen deprived environment for metallurgical testing. All core from this large sample set have been submitted for metallurgical testing at the laboratory at the Cozamin mine, Mexico. Another aim of the 2010 program was to increase the overall pierce-point density to a nominal 50 m x 50 m grid in the parts of the deposit that have a reasonable expectation of economic extraction based upon previous mine plans, and assuming a positive feasibility study.

Most new exploration holes were drilled on an azimuth of 180°, and range in length from 496 m to 678 m, with inclinations ranging from -90° to -70° and averaging -77°. This inclination ensures that most mineralized intercepts are at or near to perpendicular to the enveloping hanging wall and footwall surfaces, and therefore the mineralized intercept can be expected to be at or close to true width.

Sampling, Analysis and Security of Samples

Sampling methods for drill core were similar for all of the exploration phases on the property. Core size varied (as discussed in earlier sections) and sampling of the core using a mechanical splitter was initially used by both SML and EMC, with SML switching to a diamond saw after the first nine drill holes, and EMC switching after approximately 30 drill holes. Splitting by diamond saw has been used ever since. Sample selection within mineralized drill core is more significant, and is discussed in detail in the following section.

In 2008, large diameter (HQ) core drilling in the Main zone was carried out by Capstone to infill gaps in previous drilling, verify historical data, obtain metallurgical samples and collect detailed geotechnical data. Drill holes covered the entire deposit area, with specific drill hole locations placed where they would result in infilling areas of lower drill hole density. The drilling was helicopter supported, facilitating access to collar locations not possible during past programs. A total of 9,897.7 m was drilled in 81 holes (78 holes for the Main Zone including 3 holes totalling 69.2 m which were lost before intersecting the ore zone). In 2010, Capstone drilled the Esso zone to increase drill hole density and confirm extents of the zone. Metallurgical samples of half core (NQ), assay samples of quarter core, bulk density measurements plus geotechnical and geological core logging were completed. Core in the zone was NQ sized; HQ core drilling was done on the upper portion of the holes to roughly 200 m deep for extra control in intercepting chosen targets at depth. Helicopter support was used for the drill program, again facilitating access to collar locations not possible in previous ground-support only programs. Overall, 34 holes totalling 18,042.1 m were drilled at the Esso Zone, including five holes totalling 1,324.3 m which were abandoned above the zone when it became apparent the hole could not hit the appropriate target at depth.

In 2008, the mineralized intervals in core were sampled in lengths ranging from 30 cm to 1.5 m, averaging 1-1.5 m. The sampling intervals are typically 1.5 m in mineralized material and may be as long as 3 m where waste intervals between mineralized zones occur. Two shoulder samples were taken in waste at both upper and lower contacts, consisting of a 1.5 m sample and a 1.0 m sample. Samples do not cross geological contacts.

The samples are tagged and then split in half using a rock saw on site. Half of the core was selected for metallurgical testing. The remaining half core is cut into two quarters. One quarter cut of the core is placed into plastic sample bags and heat sealed. Sample bags, typically 6 to 10, are then packaged into rice bags with security zip seals and sent to Terrace for assaying. The sample submittal was dispatched from the site via air charter to Dease Lake and by Canadian Freightways overland to Terrace. The remaining quarter core was returned to the original boxes and remains on site as a record of the hole.

All Kutcho samples were processed and assayed at ALS Chemex ("Chemex") in North Vancouver. Core samples including blanks were ground to 80% passing 100 mesh. Analysis of core samples and standard reference materials included induced coupled plasma (ICP) methods for 33 elements following an aqua regia digestion. If either copper or zinc reports over 2500 ppm (0.25%), ore grade analysis is conducted for copper, zinc and silver. The ore grade analysis included aqua regia digestion followed by atomic absorption spectroscopy.

In 2010, mineralized intervals in core were sampled in lengths ranging from 20 cm to 1.5 m, averaging 1-1.5 m. The sampling intervals are typically 1.5 m in mineralized material and may be as long as 3 m where waste intervals between mineralized zones occur. Two shoulder samples were taken in waste at both upper and lower contacts, consisting of a 1.5 m sample and a 1.0 m sample. Samples do not cross geological contacts.

The samples are tagged and then split in half using a rock saw on site. Half of the core was selected for metallurgical testing. The remaining half core is cut into two quarters. One quarter cut of the core is placed into plastic sample bags and heat sealed. Sample bags, typically 6 to 10, are then packaged into rice bags with security zip seals and sent to Terrace for sample preparation. The sample submittal was dispatched from the site via air charter to Smithers and by Canadian Freightways overland to Terrace. The remaining quarter core was returned to the original boxes and remains on site as a record of the hole.

The core samples and blanks submitted to Chemex were first crushed in a jaw crusher to reduce the material to greater than 70% -10 mesh (2 mm) with a 250 g subsample split and pulverized to better than 85% passing -75µm. Analysis of core samples and standard reference materials included induced coupled plasma (ICP) methods for copper, silver, zinc and lead following an aqua regia digestion. If either copper or zinc reports over 2500 ppm (0.25%), ore grade analysis is conducted for copper, zinc and silver. The ore grade analysis included aqua regia digestion followed by atomic absorption spectroscopy. Gold was determined using a fire assay procedure on a thirty grams sub-sample with atomic absorption spectroscopy finish.

In 2011, mineralized intervals in core were sampled in lengths ranging from 20cm to 1.5m, averaging 1-1.5 m. The sampling intervals are typically 1.5 m in mineralized material and may be as long as 3 m where waste intervals between mineralized zones occur. Two shoulder samples were taken in waste at both upper and lower contacts, consisting of a 1.5 m sample and a 1.0 m sample. Samples do not cross geological contacts.

The samples are tagged and then split in half using a rock saw on site. Half the core is returned to the core box and the other half is submitted for analysis. Sample bags, typically 6 to 10, are then packaged into rice bags with security zip seals and sent to Terrace, BC for sample preparation. The sample submittal was dispatched from the site via air charter to Smithers, BC, and by Canadian Freightways overland to Terrace.

The core samples and blanks submitted to Chemex were first crushed in a jaw crusher to reduce the material to greater than 70% -10 mesh (2 mm) with a 250 g subsample split and pulverized to better than 85% passing -75µm. Analysis of core samples and standard reference materials included induced coupled plasma (ICP) methods for copper, silver, zinc and lead following an aqua regia digestion. If either copper or zinc reports over 2500ppm (0.25%), ore grade analysis is conducted for copper, zinc and silver. The ore

grade analysis included aqua regia digestion followed by atomic absorption spectroscopy. Gold was determined using a fire assay procedure on a thirty grams sub-sample with atomic absorption spectroscopy finish.

Brad Mercer and Garth Kirkham both visited the property during the 2008 program, viewed and inspected core, inspected drill sites, reviewed procedures and confirmed data collection techniques. It is the author's opinion that the methods and procedures met and/or exceeded industry standards and best practices. No individual sample validation and verification was employed by the author due to the history of the property and it is believed that the level of workmanship and professionalism is at the highest level and therefore not warranted.

Mineral Resource and Mineral Reserve Estimates

The mineral resource estimates were completed by Garth Kirkham, P.Geo., of Kirkham Geosystems Ltd., using industry standard methods that conform to NI 43-101 and utilizing MineSight™ Software.

Mineral resource estimates are tabulated at a 1.5% copper cut-off for all three deposits combined and are summarized in the table below.

Kutcho Project Mineral Resource Summary

Kutcho Project - Mineral Resource Estimate at a 1.5% Copper Cut-Off for All Deposits^(*)									
Class	Tonnes (000s)	Grade				Contained Metal			
		Copper (%)	Zinc (%)	Gold (g/t)	Silver (g/t)	Copper (M lb)	Zinc (M lb)	Gold (K oz)	Silver (K oz)
Measured (M)	5,421	2.15	2.86	0.34	31.4	256.6	341.8	59	5,482
Indicated (I)	5,859	2.24	3.67	0.45	41.6	289.2	473.5	84	7,831
M & I	11,280	2.19	3.28	0.39	36.7	545.8	815.3	143	13,313
Inferred	1,090	1.74	2.04	0.35	30.7	41.9	49.1	12	1,077

*Numbers may not total due to rounding.

The mineral reserve classifications used conform to the Canadian Institute of Mining, Metallurgy and Petroleum classification of NI 43-101 mineral resource and reserve definitions and Companion Policy 43-101CP.

The Mineral Reserves estimate is listed in the table below.

Mineral Reserve Estimate

Deposit	Classification	Tonnes	Cu %	Zn %	Ag g/t	Au g/t
Main	Probable	8,106,267	1.92	2.51	28.02	0.31
Esso	Probable	2,334,894	2.32	5.53	57.48	0.59
Total	Probable	10,441,161	2.01	3.19	34.61	0.37

The Mineral Reserves identified in the table above comply with CIM definitions and standards for an NI 43-101 Preliminary Feasibility (Prefeasibility) Study. At the time of the Kutcho Report, the project is economically viable using lower than current metal prices in the economic analysis. The report did not identify any mining, metallurgical, infrastructure or other relevant factors that may materially affect the estimates of the mineral reserves or potential production.

Mining Operations

Development of the underground mine and pre-stripping of a small starter pit commences in Year -1. The small starter pit ore will supplement initial production of ore in order to attain full mill capacity (2,500 tpd) in the first year of production. The underground mine then provides all mill feed commencing in Year 2 to the end of the mine life.

Two underground mining methods are proposed: mechanized cut & fill (“MCF”) for the shallow dipping mineralization, and sublevel long-hole (“LH”) stoping with backfill for those blocks amenable to bulk mining. The initial pre-production development period is estimated to 18 months (Year -1 to mid Year 1). All lateral capital development is assumed to be completed by Kutcho Copper.

The primary access for the Main mine will be a single straight incline from a starting floor elevation of 1,522 m. The cross-sectional area will be 5 m high by 5 m wide to provide clearance for equipment, ventilation and services.

Two ramp systems will be driven off the primary access ramp, one to the east and the other to the West to provide access to the other Main deposit ore zones. The East incline ramp will be driven at a maximum grade of +15%. The West ramp will split into upper and lower ramps driven at grades of +/- 15%.

Access to the Esso deposit will be via a 2,600 metre long decline ramp from surface to the 1090 m elevation at the top of the Esso ore body. This ramp will also be 5 m x 5 m and will have an average grade of -15%. A central ramp will then be developed to the bottom of the Esso deposit, with sublevels and accesses driven East and West to the Esso mining zones. Although not designed for exploration purposes, the Esso access ramp could be utilized for future exploration drilling of the Sumac deposit.

During pre-production, the primary ramp in the Main zone will be established as well as secondary access ramps to the West, centre and East mining zones. Production is exclusively from the Main ore deposits in Years 1-2, while Esso is being developed.

The access ramp to Esso begins in Year -1 and is complete in Year 1. Esso’s pre-production period is approximately 40 months. Ore production from Esso begins in Year 3 and continues at 1,500 tpd until the deposit is exhausted in Year 8. While Esso is in production, Main’s rate is reduced to 1,000 tpd for a total rate of 2,500 tpd from both mines. Once Esso is exhausted, Main production returns to 2,500 tpd until the end of the mine in Year 12.

Backfill is an integral part of the underground mine plan and will incorporate process plant tailings as well as mine development waste. The primary purposes of the backfill are:

- Underground support and working platform in MCF mining; and
- Storage of Potentially Acid Generating (“PAG”) waste rock and process plant tailings.

Waste rock will be scheduled so that material mined early in the underground development effort and more likely to be classified as non-PAG will be hauled and used on surface. As the stoping reaches a steady state underground, development rock will preferentially be used as backfill. The backfill plan calls for all waste rock generated after production Year 2 to be stored underground.

Therefore there are no permanent PAG or non-PAG waste dumps. Any temporary dumps during the initial start up will be utilized for construction (non-PAG) or placed into the vacant open pit (PAG and non-PAG) or back underground as fill (PAG and non-PAG).

An insufficient volume of waste rock is available for the backfill requirement; hence the use of paste fill has been incorporated into the mine plan. Paste fill consists of process tailings partially dewatered and mixed with cement. This material is of a consistency that can be directed to specific locations by positive displacement pumps and pipeline. The fill plant will be operated such that all tailings required for backfill will be converted to thickened slurry and pumped to the mine for use as fill. Tailings not required for backfill will be directed to a permanent surface tailings storage facility (“TSF”) In general, 50% of the tailings are suitable for paste backfill.

The Kutcho Project is subject to the British Columbia Environmental Assessment Act and the Canadian Environmental Assessment Act. The former requires that the project undergo an environmental assessment and obtain an Environmental Assessment (EA) Certificate. The Project was initiated into the BC EA process through the issuance of a Section 10 order by the BC Environmental Assessment Office (EAO) on July 29,

2005. The Provincial and Federal processes will be integrated in a harmonized review, with the EAO taking the lead. On December 24, 2007, the Canadian Environmental Assessment Agency announced that the Project would be subject to a Comprehensive Study.

In 2005, a program of environmental and socio-economic baseline studies was begun to provide the information necessary to prepare the EA Application and to develop management and monitoring plans. It covered all facets of the biophysical and human environment, including meteorology, air quality, hydrology, hydrogeology, metal leaching and acid rock drainage, aquatic ecology, fish and fish habitat, soils, vegetation, ecosystem mapping, wildlife, wetlands, archaeology, socio-economics, land use, country foods and human health, and traditional use and traditional ecological knowledge. The program was completed in 2007. Monitoring of meteorology, air quality, and hydrology and water quality will continue throughout the construction, operation, closure and post-closure phases.

The most significant environmental issue for the project will be maintaining water quality in the receiving environment. Treatment of mine effluent to BC water quality criteria will be required during all mining phases. The project is in the traditional territories of the Tahltan and Kaska Dena First Nations. Consultation with these First Nations and other stakeholders has been ongoing since the project began.

The Kutcho Project contains a substantial sulphide resource that can be selectively mined by underground mining methods. It has several potential advantages versus mining by large scale open pit methods including but not limited to:

- Selectivity in mining which would deliver a higher grade feed to the process plant;
- Less total material moved, which translates into decreased surface disturbance and waste material stored;
- Significantly reducing the exposed PAG rock in the footwall of the deposit which, in the larger open pit scenario, resulted in greater ongoing acid generating potential; and
- The opportunity to permanently store a large portion of the tailings and significant quantities of PAG waste rock underground.

The environmental advantages for local stakeholders should increase the likelihood of receiving permits and approvals to proceed with the project in a timely manner since it offers an attractive alternative to open pit mining. At the metal prices used for evaluation, the project is economic and should proceed to the feasibility stage.

The mine life for Kutcho, based on the assumptions made in the Kutcho Report, is 12 years. There are a number of potential factors that could extend the mine life and or justify an increase in production capacity that have not been included in the Kutcho Report.

Development to access the Esso deposit could be used to further explore the Sumac deposit. The Sumac deposit has previously been interpreted to contain a potentially significant, lower grade resource and may contain higher grade areas within the overall Sumac deposit, but has had very little drilling done to date, certainly not enough to define any higher grade zones within the current resource estimate. Exploration success would justify either a longer life at current production rates, lower mining costs in deference to Esso ore, or possibly the justification for increasing plant capacity. Such a development could be quite beneficial since the primary infrastructure would already be in place for the development of Sumac.

Exploration and Development

Only minimal exploration as required to maintain the claim holdings in good standing is planned for 2012.

ITEM 5 - RISK FACTORS

Capstone is subject to a number of significant risks due to the nature of its business and the present stage of

its business development. Readers should carefully consider the risks and uncertainties described below before deciding whether to invest in Capstone common shares. Capstone's failure to successfully address the risks and uncertainties described below could have a material adverse effect on its business, financial condition and/or results of operations, and the trading price of its common shares may decline and investors may lose all or part of their investment. Capstone cannot give assurance that it will successfully address these risks or other unknown risks that may affect its business.

Mining is inherently dangerous and subject to conditions or events beyond the Company's control, the occurrence of which could have a material adverse effect on the Company's business, financial condition, results of operations and prospects.

The Company's operations are subject to all the hazards and risks normally encountered in the exploration, development and production of copper and other metals, including, without limitation, fires, power outages, labour disruptions, flooding, explosions, cave-ins, landslides and other geotechnical instabilities, metallurgical and other processing problems and other conditions involved in the mining of minerals, any of which could result in damage to, or destruction of, the Company's mines, plants and equipment, personal injury or loss of life, environmental damage, delays in mining, increased production costs, asset write-downs, monetary losses and legal liability. The occurrence of any of these events could result in a prolonged interruption in the Company's operations that would have a material adverse effect on the Company's business, financial condition, results of operations and prospects.

Changes in the market price of copper and other metals, which in the past have fluctuated widely, could negatively affect the profitability of the Company's operations and financial condition.

The commercial viability of the Company's properties and the Company's ability to sustain operations is dependent on, among other things, the market price of copper, lead, zinc, gold and silver. Depending on the price to be received for any minerals produced, the Company may determine that it is impractical to continue commercial production at the Cozamin Mine or the Minto Mine or to develop the Santo Domingo Project or the Kutcho Project. A reduction in the market price of copper, lead, zinc, gold or silver may prevent the Company's properties from being economically mined or result in the write-off of assets whose value is impaired as a result of low metals prices. The market price of copper, lead, zinc, gold and silver is volatile and is impacted by numerous factors beyond the Company's control, including, among others:

- international economic and political conditions;
- expectations of inflation or deflation;
- international currency exchange rates;
- interest rates;
- global or regional consumptive patterns;
- speculative activities;
- levels of supply and demand;
- increased production due to new mine developments;
- decreased production due to mine closures;
- improved mining and production methods;
- availability and costs of metal substitutes;
- metal stock levels maintained by producers and others; and
- inventory carrying costs.

The effect of these factors on the price of base and precious metals cannot be accurately predicted and there can be no assurance that the market price of these metals will remain at current levels or that such prices will improve. A decrease in the market price of copper, lead, zinc, gold and/or silver would affect the profitability of the Cozamin Mine and the Minto Mine and could affect the Company's ability to finance the exploration and development of the Company's other properties, which would have a material adverse effect on the Company's business, financial condition, results of operations and prospects.

The sale of the Company's metals is subject to counterparty and market risks.

The Company has entered into concentrate off-take agreements whereby 100% of the concentrate produced from the Minto Mine and 100% of the copper, lead and zinc concentrate produced from the Cozamin Mine are purchased, and 50% of the copper and iron concentrate to be produced from the Santo Domingo Project

will be purchased, by various counterparties. The Company has also sold forward all of the Company's gold and silver production from the Minto Mine and all of the Company's silver production from the Cozamin Mine to Silver Wheaton. If any counterparty to any off-take or forward sales agreement does not honour such arrangement, or should any such counterparty become insolvent, the Company may incur losses for concentrate or gold and silver already shipped and be forced to sell all of the Company's concentrate, gold and/or silver, or a greater volume than the Company intended, in the spot market, which is subject to market price fluctuations. In addition, there can be no assurance that the Company will be able to renew any of the Company's off-take or forward sales agreements on acceptable terms, or at all, or that the Company's production will meet the qualitative requirements under such agreements.

The Company may require substantial additional capital to accomplish the Company's exploration and development plans, and there can be no assurance that financing will be available on terms acceptable to the Company, or at all.

The Company may require substantial additional financing to accomplish the Company's exploration and development plans for the Santo Domingo Project and the Kutcho Project and to advance the Cozamin Mine and the Minto Mine to achieve designed production rates. These financing requirements could adversely affect the Company's credit ratings and the Company's ability to access the capital markets in the future. Failure to obtain sufficient financing, or financing on terms acceptable to the Company, may result in a delay or indefinite postponement of exploration, development or production at one or more of the Company's properties. Additional financing may not be available when needed and the terms of any agreement could impose restrictions on the operation of the Company's business. Failure to raise financing when needed could have a material adverse effect on the Company's business, financial condition, results of operations and prospects.

Fluctuations in foreign currency exchange rates could have an adverse effect on the Company's business, financial condition, results of operations and prospects.

Fluctuations in the Canadian dollar or Mexican peso relative to the US dollar could significantly affect the Company's business, financial condition, results of operations and prospects. Exchange rate movements can have a significant impact on the Company as all of the Company's revenue is received in US dollars but most of the Company's operating and capital costs are incurred in Canadian dollars and Mexican pesos. Also, as a result of the Company's acquisition of Far West, the Company is exposed to currency fluctuations in the Chilean peso relating to expenditures for the Santo Domingo Project. As a result, a strengthening of these currencies relative to the US dollar will reduce the profitability of the Company's projects and affect the Company's ability to continue to finance the Company's operations. The Company does not currently, and does not expect to, enter into foreign currency contracts to hedge against currency risk.

The Company's calculations of mineral resources and mineral reserves are estimates and are subject to uncertainty.

The Company's calculations of mineral resources and mineral reserves are estimates and depend upon geological interpretation and statistical inferences drawn from drilling and sampling analysis, which may prove to be inaccurate. Actual recoveries of copper, lead, zinc, gold and silver from mineralized material may be lower than those indicated by test work. Any material change in the quantity of mineralization, grade or stripping ratio, may affect the economic viability of the Company's properties. In addition, there can be no assurance that metal recoveries in small-scale laboratory tests will be duplicated in larger scale tests under on-site conditions or during production. Notwithstanding pilot plant tests for metallurgy and other factors, there remains the possibility that the ore may not react in commercial production in the same manner as it did in testing. Mineral resources that are not mineral reserves do not have demonstrated economic viability. Mining and metallurgy are inexact sciences and, accordingly, there always remains an element of risk that a mine may not prove to be commercially viable.

Until a deposit is actually mined and processed, the quantity of mineral resources and mineral reserves and grades must be considered as estimates only. In addition, the quantity of mineral resources and mineral reserves may vary depending on, among other things, metal prices, cut-off grades and operating costs. Any material change in quantity of mineral reserves, mineral resources, grade, percent extraction of those mineral reserves recoverable by underground mining techniques or the stripping ratio for those mineral reserves

recoverable by open pit mining techniques may affect the economic viability of the Company's mining projects.

The Company is dependent on key management personnel.

The Company is very dependent upon the personal efforts and commitment of the Company's existing management and the Company's current operations and future prospects depend on the experience and knowledge of these individuals. The Company does not maintain any "key person" insurance. To the extent that one or more of the Company's members of management are unavailable for any reason, or should the Company lose the services of any of them, a disruption to the Company's operations could result, and there can be no assurance that the Company will be able to attract and retain a suitable replacement.

General economic conditions or changes in consumption patterns may adversely affect the Company's growth and profitability.

Many industries, including the base and precious metals mining industry, are impacted by global market conditions. Some of the key impacts of the recent financial market turmoil include contraction in credit markets resulting in a widening of credit risk, devaluations and high volatility in global equity, commodity, foreign exchange and metals markets, and a lack of market liquidity. A continued or worsened slowdown in the financial markets or other economic conditions, including, but not limited to, reduced consumer spending, increased unemployment rates, deteriorating business conditions, inflation, deflation, volatile fuel and energy costs, increased consumer debt levels, lack of available credit, changes in interest rates and changes in tax rates may adversely affect the Company's growth and profitability potential. Specifically:

- a global credit/liquidity issue could impact the cost and availability of financing and the Company's overall liquidity;
- volatility of copper, lead, zinc, gold and/or silver prices may impact the Company's future revenues, profits and cash flows;
- recessionary pressures could adversely impact demand for the Company's production;
- volatile energy prices, commodity and consumables prices and currency exchange rates could negatively impact potential production costs; and
- devaluation and volatility of global stock markets could impact the valuation of the Company's securities, which may impact the Company's ability to raise funds through future issuances of equity.

These factors could have a material adverse effect on the Company's business, financial condition, results of operations and prospects.

There are uncertainties and risks related to the start-up of operations at the Santo Domingo Project and the Kutcho Project, and if the construction and development of these projects are not completed, it could adversely affect the Company's business, financial condition, results of operations and prospects.

As part of the Company's strategy, the Company will continue the Company's efforts to develop new mineral projects, including the Santo Domingo Project and the Kutcho Project. Development of these projects will require obtaining permits and financing, and the construction and operation of mines, processing plants and related infrastructure. As a result, the Company will be subject to all of the risks associated with establishing new mining operations, including:

- the timing and cost, which can be considerable, of the construction of mining and processing facilities and related infrastructure;
- the availability and cost of skilled labour, mining equipment and principal supplies needed for operations, including explosives, fuels, chemical reagents, water, power, equipment parts and lubricants;
- the availability and cost of appropriate smelting and refining arrangements;
- the need to obtain necessary environmental and other governmental approvals and permits and the timing of the receipt of those approvals and permits;
- the availability of funds to finance construction and development activities;
- industrial accidents;
- mine failures, shaft failures or equipment failures;
- natural phenomena such as inclement weather conditions, floods, droughts, rock slides and seismic

- activity;
- unusual or unexpected geological and metallurgic conditions;
- exchange rate and commodity price fluctuations;
- potential opposition from non-governmental organizations, environmental groups or local groups, which may delay or prevent development activities; and
- restrictions or regulations imposed by governmental or regulatory authorities.

The costs, timing and complexities of developing the Company's projects may be greater than anticipated. Cost estimates may increase significantly as more detailed engineering work is completed on a project. It is common in mining operations to experience unexpected costs, problems and delays during construction, development and mine start-up. Accordingly, the Company cannot provide assurance that the Company's activities will result in profitable mining operations at the Company's mineral properties. If there are significant delays in when these projects are completed and are producing on a commercial and consistent scale, and/or their capital costs were to be significantly higher than estimates, these events could have a significant adverse effect on the Company's results of operation, cash flow from operations and financial condition.

High metal prices in recent years have encouraged increased mineral exploration, development and production activity, which has increased demand for, and cost of, exploration, development and construction services and equipment.

High metal prices in recent years have encouraged increases in mineral exploration, development and production activities, which has resulted in increased demand for, and cost of, exploration, development and construction services and equipment. There has also been a shortage of skilled workers in the mining industry in recent years, particularly with respect to experienced mine construction and mine management personnel. In addition, employee turnover rates in the mining industry have increased as participants in the minerals industry compete for skilled personnel. Increased demand for services and equipment could result in delays if services or equipment cannot be obtained in a timely manner due to inadequate availability, and may cause scheduling difficulties due to the need to coordinate the availability of services or equipment, any of which could materially increase the Company's project exploration and any development and/or construction costs. Increases in both operating and capital costs must be factored into economic assessments of existing and proposed mining projects. These increases may increase the financing requirements for such projects or render such projects uneconomic.

Mineral rights or surface rights to the Company's properties could be challenged, and, if successful, such challenges could have a material adverse effect on the Company's production and the Company's business, financial condition, results of operations and prospects.

Title to the Company's properties may be challenged or impugned. The Company's property interests may be subject to prior unregistered agreements or transfers and title may be affected by undetected defects. Surveys have not been carried out on the majority of the Company's properties and, therefore, in accordance with the laws of the jurisdiction in which such properties are situated, their existence and area could be in doubt.

A claim by a third party asserting prior unregistered agreements or transfer on any of the Company's properties, especially where mineral reserves have been located, could result in the Company losing a commercially viable property. Even if a claim is unsuccessful, it may potentially affect the Company's current operations due to the high costs of defending against the claim and its impact on the Company's senior management's time. Title insurance is generally not available for mineral properties and the Company's ability to ensure that the Company has obtained a secure claim to individual mineral properties or mining concessions may be severely constrained. The Company relies on title information and/or representations and warranties provided by the Company's grantors. If the Company loses a commercially viable property, such a loss could lower the Company's future revenues or cause the Company to cease operations if the property represented all or a significant portion of the Company's mineral reserves at the time of the loss.

The Company faces added risks and uncertainties as a result of operating in foreign jurisdictions.

The Company's business operates in a number of foreign countries where there are added risks and

uncertainties due to the different economic, cultural and political environments. The Company's mineral exploration and mining activities may be adversely affected by political instability and changes to government regulation relating to the mining industry. Other risks of foreign operations include political unrest, labour disputes and unrest, invalidation of governmental orders and permits, corruption, war, civil disturbances and terrorist actions, arbitrary changes in law or policies of particular countries (including nationalization of mines), foreign taxation, price controls, delays in obtaining or renewing or the inability to obtain or renew necessary environmental permits, opposition to mining from environmental or other non-governmental organizations, limitations on foreign ownership, limitations on the repatriation of earnings, limitations on mineral exports and increased financing costs. Local economic conditions, including higher incidences of criminal activity and violence in areas of Mexico and Chile, can also adversely affect the security of the Company's operations and the availability of supplies. In addition, risks of operations in Mexico and Chile include extreme fluctuations in currency exchange rates, high rates of inflation, hostage taking and expropriation. These risks may limit or disrupt the Company's projects, restrict the movement of funds or result in the deprivation of contract rights or the taking of property by nationalization or expropriation without fair compensation. While the Company believes that each of the jurisdictions in which the Company's properties are located represents a favourable environment for mining companies to operate, there can be no assurance that changes in the government or laws or changes in the regulatory environment for mining companies or for non-domiciled companies will not be made that would adversely affect the Company's business, financial condition, results of operation and prospects.

It may be difficult for the Company to find and hire qualified people in the mining industry who are situated in Mexico, Chile and Yukon or to obtain all of the necessary services or expertise in Mexico, Chile and Yukon or to conduct operations on the Company's projects at reasonable rates. If qualified people and services or expertise cannot be obtained in Mexico, Chile and Yukon, the Company may need to seek and obtain those services from people located outside of these areas, which will require work permits and compliance with applicable laws and could result in delays and higher costs to conduct operations in Mexico, Chile and Yukon.

The Company's operations are subject to significant governmental regulation, which could significantly limit the Company's exploration and production activities.

The Company's mineral exploration and development activities are subject to governmental approvals and various laws and regulations governing development, operations, taxes, labour standards and occupational health, mine safety, toxic substances, land use, water use and land claims affecting local, First Nations and Aboriginal populations. The liabilities and requirements associated with the laws and regulations related to these and other matters may be costly and time-consuming and may restrict, delay or prevent commencement or continuation of exploration or production operations. The Company cannot assure you that the Company has been or will be at all times in compliance with all applicable laws and regulations. Failure to comply with applicable laws and regulations may result in the assessment of administrative, civil and criminal penalties, the imposition of cleanup and site restoration costs and liens, the issuance of injunctions to limit or cease operations, the suspension or revocation of permits or authorizations and other enforcement measures that could have the effect of limiting or preventing production from the Company's operations. The Company may incur material costs and liabilities resulting from claims for damages to property or injury to persons arising from the Company's operations. If the Company is pursued for sanctions, costs and liabilities in respect of these matters, the Company's mining operations and, as a result, the Company's financial performance, financial position and results of operations, could be materially and adversely affected.

In addition, no assurance can be given that new rules and regulations will not be enacted or that existing rules and regulations will not be applied in a manner that could limit or curtail the Company's exploration, development or production. Amendments to current laws, regulations and permits governing operations and activities of mining and exploration companies, or the more stringent implementation thereof, could have a material adverse impact on the Company and cause increases in the Company's exploration expenses, capital expenditures or production costs or a reduction in the levels of production at the Company's producing properties or require abandonment or delays in exploring or developing the Company's properties.

The Company's operations are subject to stringent environmental laws and regulations that could significantly limit the Company's ability to conduct the Company's business.

The Company's operations are subject to various laws and regulations governing the protection of the environment, exploration, development, production, taxes, labour standards, occupational health, waste disposal, safety and other matters. Environmental legislation provides for restrictions and prohibitions on spills, releases or emissions of various substances produced in association with certain mining operations, such as seepage from tailings disposal areas, which would result in environmental pollution. A breach of such legislation may result in the imposition of fines and penalties. In addition, certain of the Company's operations require the submission and approval of environmental impact assessments. Environmental legislation is evolving in the direction of stricter standards and enforcement, higher fines and penalties for non-compliance, more stringent environmental assessments of proposed projects and a heightened degree of responsibility for companies and their directors, officers and employees. Compliance with changing environmental laws and regulations may require significant capital outlays, including obtaining additional permits, and may cause material changes or delays in, or the cancellation of, the Company's exploration programs or current operations.

The Company is required to obtain, maintain and renew environmental, construction and mining permits, which is often a costly and time-consuming process.

Mining companies, including the Company, need many environmental, construction and mining permits, each of which can be time-consuming and costly to obtain, maintain and renew. In connection with the Company's current and future operations, the Company must obtain and maintain a number of permits that impose strict conditions, requirements and obligations on the Company, including those relating to various environmental and health and safety matters. To obtain, maintain and renew certain permits, the Company is required to conduct environmental assessments pertaining to the potential impact of the Company's current and future operations upon the environment and to take steps to avoid or mitigate those impacts. For example, the Kutcho Project must undergo an environmental assessment in order to obtain an environmental assessment certificate from the British Columbia Environmental Assessment Office and Canadian Environmental Assessment Agency before making an application for authorization to conduct development activities and operations. There is a risk that the Kutcho Project will not successfully complete the environmental assessment process and will be unable to progress to the development or operational stage.

Permit terms and conditions can also impose restrictions on how the Company conducts the Company's operations and limit the Company's flexibility in developing the Company's mineral properties. Many of the Company's permits are subject to renewal from time to time, and renewed permits may contain more restrictive conditions than the Company's existing permits. In addition, the Company may be required to obtain new permits to expand the Company's operations, and the grant of such permits may be subject to an expansive governmental review of the Company's operations. Alternatively, the Company may not be successful in obtaining such permits, which could prevent the Company from commencing or expanding operations or otherwise adversely affect the Company's business, financial condition, results of operation and prospects. For instance, although the Minto Mine is currently permitted to conduct operations under its Quartz Mining Licence and two Water Use Licences, amendments to these licences are required in order to implement the Company's planned mine expansion. These amendments may not be granted by the Yukon regulatory authorities. Further, renewal of the Company's existing permits or obtaining new permits may be more difficult if the Company is not able to comply with the Company's existing permits. Applications for permits, permit area expansions and permit renewals may be subject to challenge by interested parties, which can delay or prevent receipt of needed permits. The permitting process can also vary by jurisdiction in terms of its complexity and likely outcomes.

Accordingly, permits required for the Company's operations may not be issued, maintained or renewed in a timely fashion or at all, may be issued or renewed upon conditions that restrict the Company's ability to conduct the Company's operations economically, or may be subsequently revoked. Any such failure to obtain, maintain or renew permits, or other permitting delays or conditions, including in connection with any environmental impact analyses, could have a material adverse effect on the Company's business, results of operations, financial condition and prospects.

Climatic conditions can affect the Company's operations at the Minto Mine.

Operations at the Minto Mine may be subject to extreme weather conditions. Unseasonable weather conditions may preclude normal work patterns and can severely limit the Company's mining operations, resulting in additional costs and delays. From 2008 to 2010, the Yukon experienced extreme weather conditions that resulted in abnormally high run-off at the Minto Mine, exceeding the normal containment capacity of the mine site. As a result, the Company decided to fill the Minto Mine main pit with water, which caused the Company to cease mining operations until the Company obtained regulatory permission to discharge the excess waters. Another year of extreme weather in the Yukon could again result in excess run-off at the mine site, which could have an adverse effect on the results of operations at the Minto Mine and on the Company's business, financial condition, results of operation and prospects.

The Company's directors and officers may have interests that conflict with the Company's interests.

Certain of the Company's directors and officers also serve as directors or officers, or have significant shareholdings in, other companies that are similarly engaged in the business of acquiring, developing and exploiting natural resource properties. To the extent that such other companies may participate in ventures which the Company may participate in, or in ventures which the Company may seek to participate in, the Company's directors and officers may have a conflict of interest in negotiating and concluding terms respecting the extent of such participation. In all cases where the Company's directors and officers have an interest in other companies, such other companies may also compete with the Company for the acquisition of mineral property investments. As a result of these conflicts of interest, the Company may not have an opportunity to participate in certain transactions, which may have a material adverse effect on the Company's business, financial condition, results of operation and prospects.

Aboriginal title claims and rights to consultation and accommodation may affect the Company's existing operations as well as development projects and future acquisitions.

The nature and extent of First Nations rights and title remains the subject of active debate, claims and litigation in Canada, including in British Columbia and Yukon. The Minto Mine lies on Category A land in Yukon where the Selkirk First Nation own both surface and subsurface rights. The Kutcho Project in British Columbia lies within an area claimed as traditional territory by both the Tahltan First Nation and the Kaska First Nation. There is a risk that any land claim settlement with the Tahltan or the Kaska may adversely affect the Company's rights to the Kutcho Project. There can be no guarantee that the unsettled nature of the land claims in British Columbia and Yukon will not create delays in project approval or unexpected interruptions in project progress, or result in additional costs to advance the Company's projects. In many cases, environmental assessment, subsequent permitting, development and operation of proposed projects is only possible with the support of the local First Nations group. In order to secure such support, the Company may have to take measures to limit the adverse impact to, and ensure that some of the economic benefits of the construction and mining activity will be enjoyed by, the local First Nations group. There is a risk that the First Nations may publicly oppose the proposed project at any stage and this potential opposition may adversely affect the project or the Company's public image. Further, Canadian law related to aboriginal rights, including aboriginal title rights, is in a period of change. There is a risk that future changes to the law may adversely affect the Company's rights to the Minto Mine and the Kutcho Project.

The Company's insurance does not cover all potential losses, liabilities and damage related to the Company's business and certain risks are uninsured or uninsurable.

In the course of exploration, development and production of mineral properties, certain risks, including rock bursts, cave-ins, fires, flooding and earthquakes may occur. It is not always possible to fully insure against such risks. The Company currently does not have insurance against all such risks and may decide not to take out insurance against all such risks as a result of high premiums or other reasons. Further, insurance against certain risks, including those related to environmental matters, is generally not available to the Company or to other companies within the mining industry. Losses from these events may cause the Company to incur significant costs that could have a material adverse effect on the Company's business, financial condition, results of operation and prospects.

Land reclamation and mine closure requirements may be burdensome and costly.

Land reclamation and mine closure requirements are generally imposed on mining companies, such as the Company's, which require the Company, among other things, to minimize the effects of land disturbance. Such requirements may include controlling the discharge of potentially dangerous effluents from a site and restoring a site's landscape to its pre-exploration form. The actual costs of reclamation and mine closure are uncertain and planned expenditures may differ from the actual expenditures required. Therefore, the amount that the Company is required to spend could be materially higher than current estimates. Any additional amounts required to be spent on reclamation and mine closure may have a material adverse effect on the Company's financial performance, financial position and results of operations and may cause the Company to alter the Company's operations. Although the Company includes liabilities for estimated reclamation and mine closure costs in the Company's financial statements, it may be necessary to spend more than what is projected to fund required reclamation and mine closure activities.

The Company's operations will be adversely affected if the Company fails to maintain satisfactory labour relations.

As of December 31, 2011, the Company had 1,115 employees, of which 371 were contractors.

The Company cannot predict at this time whether the Company will be able to reach new agreements with the Company's unionized workforce without a work stoppage or other labour unrest, and any such new agreements may not be on terms favourable to the Company. Additional groups of non-union employees may seek union representation in the future. Further, relations with employees may be affected by changes in the scheme of labour relations that may be introduced by the relevant governmental authorities in jurisdictions where the Company conducts business. Changes in such legislation or otherwise in the Company's relationship with the Company's employees may result in higher ongoing labour costs, employee turnover, strikes, lockouts or other work stoppages, any of which could have a material adverse effect on the Company's business, results of operations and financial condition.

Increased energy prices could adversely affect the Company's results of operations and financial condition.

Mining operations and facilities are intensive users of electricity and carbon-based fuels. Energy prices can be affected by numerous factors beyond the Company's control, including global and regional supply and demand, political and economic conditions, and applicable regulatory regimes. The prices of various sources of energy may increase significantly from current levels. An increase in energy prices for which the Company is not hedged could materially adversely affect the Company's results of operations and financial condition.

The Company may be unable to compete successfully with other mining companies.

The mining industry is competitive in all of its phases. The Company faces strong competition from other mining companies in connection with the acquisition of properties producing, or capable of producing, metals. Many of these companies have greater liquidity, greater access to credit and other financial resources, newer or more efficient equipment, lower cost structures, more effective risk management policies and procedures and/or a greater ability than the Company to withstand losses. The Company's competitors may be able to respond more quickly to new laws or regulations or emerging technologies, or devote greater resources to the expansion or efficiency of their operations than the Company can. In addition, current and potential competitors may make strategic acquisitions or establish cooperative relationships among themselves or with third parties. Accordingly, it is possible that new competitors or alliances among current and new competitors may emerge and gain significant market share to the Company's detriment. The Company may also encounter increasing competition from other mining companies in the Company's efforts to hire experienced mining professionals. Increased competition could adversely affect the Company's ability to attract necessary capital funding, to acquire it on acceptable terms, or to acquire suitable producing properties or prospects for mineral exploration in the future. As a result of this competition, the Company may not be able to compete successfully against current and future competitors, and any failure to do so could have a material adverse effect on the Company's business, financial condition, results of operations and prospects.

The Company may experience difficulties with the Company's joint venture partners.

The Company currently operate the Santo Domingo Project through a joint venture with KORES and the Company may in the future enter into additional joint ventures with other partners. The Company is subject to the risks normally associated with the conduct of joint ventures, which include disagreements with the Company's joint venture partners on how to develop, operate and finance the Company's joint venture activities, including the Santo Domingo Project, and possible disputes with the Company's joint venture partners regarding joint venture matters. These disagreements and disputes may have an adverse effect on the Company's ability to successfully pursue joint ventures, including the development of the Santo Domingo Project, which could affect the Company's business, financial condition, results of operation and prospects.

The Company may experience problems integrating new acquisitions into the Company's existing operations.

The Company's success at completing acquisitions will depend on a number of factors, including, but not limited to, identifying acquisitions that fit the Company's strategy, negotiating acceptable terms with the seller of the business or property to be acquired and obtaining approval from regulatory authorities in the jurisdictions of the business or property to be acquired. Any positive effect on the Company's results from the Company's acquisitions, including the recent Far West acquisition, will depend on a variety of factors, including, but not limited to, assimilating the operations of an acquired business or property in a timely and efficient manner, maintaining the Company's financial and strategic focus while integrating the acquired business or property, implementing uniform standards, controls, procedures and policies at the acquired business, as appropriate, and to the extent that the Company makes an acquisition outside of markets in which the Company has previously operated, conducting and managing operations in a new operating environment.

Acquiring additional businesses or properties could place increased pressure on the Company's cash flow if such acquisitions involve cash consideration or the assumption of obligations requiring cash payments. The integration of the Company's existing operations with any acquired business, including the recent Far West acquisition, will require significant expenditures of time, attention and funds. Achievement of the benefits expected from consolidation will require the Company to incur significant costs in connection with, among other things, implementing financial and planning systems. The Company may not be able to integrate the operations of a recently acquired business or restructure its previously existing business operations without encountering difficulties and delays. In addition, this integration may require significant attention from the Company's management team, which may detract attention from the Company's day-to-day operations. Over the short-term, difficulties associated with integration could have a material adverse effect on the Company's business, operating results, financial condition and the price of the Company's securities. In addition, the acquisition of mineral properties, such as the Santo Domingo Project, may subject the Company to unforeseen liabilities, including environmental liabilities.

The Company may fail to realize the anticipated benefits of the Far West acquisition, which could have a material adverse effect on the Company's business, financial condition and results of operations.

The Far West acquisition was completed with the expectation that it will result in increased copper and other metal production, increased earnings and enhanced growth opportunities. These anticipated benefits will depend in part on whether Capstone's and Far West's operations can be integrated in an efficient and effective manner. Many operational and strategic decisions and certain staffing decisions have not yet been made. These decisions and the integration of the two companies will present challenges to management, including the integration of systems and personnel of the two companies, and special risks, including possible unanticipated liabilities and unanticipated costs. As a result of these factors, it is possible that the cost reductions and synergies expected from the acquisition of Far West will not be realized. In addition, such synergies assume certain realized long-term metal prices and foreign exchange rates. If actual prices were below such assumed prices, the realization of potential synergies could be adversely affected, which could have a material adverse effect on the Company's business, financial condition, results of operation and prospects.

ITEM 6 - DIVIDENDS AND DISTRIBUTIONS

The Company has neither declared nor paid any dividends or distributions on its common shares in the last

three financial years and has no present intention of paying dividends or distributions on its common shares, as it anticipates that all available funds will be invested to finance the growth of its business.

ITEM 7 - DESCRIPTION OF CAPITAL STRUCTURE

7.1 General Description of Capital Structure

The Company has an authorized capital of an unlimited number of common shares without par value, 376,234,211 of which were issued and outstanding as of December 31, 2011 and 378,983,714 of which were outstanding as of March 30, 2012.

As of March 30, 2012, the Company had warrants outstanding for the purchase of 4,451,221 common shares at an exercise price of C\$2.66. In connection with the acquisition of Far West, Capstone issued 4,451,221 warrants in exchange for 2,439,025 warrants of Far West at an exchange ratio of 1.825 Capstone warrants for each Far West warrant exchanged.

Common Shares

The holders of the common shares are entitled to receive notice of and to attend and vote at all meetings of the shareholders of the Company and each common share confers the right to one vote in person or by proxy at all meetings of the shareholders of the Company. The holders of the common shares, subject to the prior rights, if any, of the holders of any other class of shares of the Company, are entitled to receive such dividends in any financial year as the Board of Directors of the Company may determine. In the event of liquidation, dissolution or winding-up of the Company, whether voluntary or involuntary, the holders of the common shares are entitled to receive, subject to the prior rights, if any, of the holders of any other class of shares of the Company, the remaining property and assets of the Company.

Stock Option Plan

The company has a Stock Option Plan in place which provides for the issuance of stock options to acquire at any time up to a maximum of 10% of the Company's issued and outstanding common shares (subject to standard anti-dilution adjustments). The plan further allows for the issuance of up to 500,000 bonus shares in any one calendar year to employees or directors of the Company. Any bonus shares that are issued are not counted in determining the number of options available to be granted under the plan.

ITEM 8 - MARKET FOR SECURITIES

8.1 Common Shares - Trading Price and Volume

The Company's shares are listed for trading through the facilities of The Toronto Stock Exchange under the symbol "CS". During the 12 months ended December 31, 2011 and the two months ended February 29, 2012, the Company's shares traded as follows:

Month	Volume	High (C\$)	Low (C\$)
February 2012	23,735,100	3.57	3.04
January 2012	35,673,700	3.71	2.66
December 2011	19,790,718	3.08	2.48
November 2011	28,418,879	3.39	2.48
October 2011	39,806,841	3.46	2.05
September 2011	41,807,504	3.31	1.97
August 2011	26,206,472	3.6	2.6
July 2011	20,038,232	3.99	3.42
June 2011	26,682,455	3.62	2.83
May 2011	34,679,489	3.87	3.10
April 2011	28,640,599	4.91	3.57
March 2011	34,176,652	4.99	3.84

Month	Volume	High (C\$)	Low (C\$)
February 2011	24,664,130	4.98	4.19
January 2011	23,141,934	4.84	4.10

8.2 Debentures - Trading Price and Volume

The Company's Debentures are listed for trading through the facilities of the Toronto Stock Exchange under the symbol "CS.DB". During the 12 months ended December 31, 2011 and the two months ended February 29, 2012, the Company's Debentures traded as follows:

Month	Volume	High (C\$)	Low (C\$)
February 2012	0	101.45	101.30
January 2012	380	101.45	101.30
December 2011	200,000	101.95	101.40
November 2011	112,000	100.25	100.10
October 2011	351,000	104.80	103.22
February 2011	41,000	118.00	118.00

All market prices are in Canadian dollars.

ITEM 9 - PRIOR SALES

During 2011, the Company granted 5,170,000 stock options as follows:

Date of Grant	Options Granted	Exercise Price
January 5	3,770,000	\$4.48
January 31	25,000	\$4.55
March 1	150,000	\$4.34
April 11	105,000	\$3.88
May 13	25,000	\$3.65
June 6	50,000	\$3.55
June 20	300,000	\$3.19
August 17	150,000	\$3.12
August 24	80,000	\$2.98
September 1	175,000	\$2.98
September 12	25,000	\$3.10
September 15	25,000	\$3.00
October 11	15,000	\$2.60
November 7	25,000	\$3.05
November 21	25,000	\$2.97
December 5	125,000	\$2.71
December 12	25,000	\$2.97
December 14	50,000	\$2.95
December 20	25,000	\$2.62

ITEM 10 - DIRECTORS AND OFFICERS

10.1 Name, Occupation and Security Holding

The name, province or state, country of residence, position or office held with the Company and principal occupation during the past five years of each director and executive officer of the Company are described below:

Name and Address	Office or Position Held	Service as a Director ⁽⁴⁾	Principal Occupation during past five years
Lawrence I. Bell ⁽¹⁾⁽²⁾ British Columbia, Canada	Director	Since November 24, 2008	Businessman; a director of Silver Wheaton Corp., International Forest Products Limited, Matrix Asset Management Inc. and Goldcorp Inc.; previously Chair of Canada Line Rapid Transit Project and Chair of BC Hydro.
George L. Brack ⁽²⁾ British Columbia, Canada	Chairman and Director	Since May 19, 2009	Businessman, currently serving on several other public company boards; previously Managing Director and Industry Head, Mining Group of Scotia Capital from December 2006 to February 2009.
Chantal Gosselin ⁽¹⁾⁽²⁾⁽³⁾ Ontario, Canada	Director	Since July 26, 2010	Vice President at Ned Goodman Investment Counsel; formerly a senior mining analyst, at Sun Valley Gold LLP; from May 2006 to March 2008 was a senior mining analyst and partner of Genuity Capital Markets.
Dale C. Peniuk ⁽¹⁾ British Columbia, Canada	Director	Since May 19, 2009	Chartered Accountant, financial consultant to the mining industry and corporate director, March 2006 to present; previously Partner KPMG LLP Chartered Accountants 1996 to 2006.
Darren M. Pylot British Columbia, Canada	President and CEO and Director	Director since February 13, 1995	President and CEO of the Company and a Director of the Company since February 1995; Director of East Asia Minerals Corp. from January 2004 to 2011; Director of Lithium 1 Inc. from July 2009 to present; Director of Zena Mining Corp. from 2009 to present; previously President, CEO, Chairman and Director of Silverstone Resources Corp. from April 2005 to 2009.
Hak-Kyun Shin ⁽³⁾ Korea	Director	Since June 20, 2011	Since 1987, the Chief Operating Officer at the Toronto office and a Director for KORES Canada Corp.
Richard N. Zimmer ⁽³⁾ British Columbia, Canada	Director	Since June 20, 2011	Former President and Chief Executive Officer of Far West Mining Ltd., which was acquired by Capstone in 2011; Vice President and Project Manager of Teck-Pogo Inc. from 1998 to 2007.
Cindy L. Burnett British Columbia, Canada	Vice President, Investor Relations	N/A	Vice President, Investor Relations since March 2011; previously Vice President, Investor Relations for Western Lithium Corp. from August 2009 to February 2011 and Investor Relations Consultant from February 2009 to August 2009; Vice President, Investor Relations for Skye Resources from November 2007 to September 2008; Vice President Ivanhoe Energy Inc. from November 2005 to November 2007.
Gregg B. Bush Texas, USA	Senior Vice President and Chief Operating Officer	N/A	Chief Operating Officer of the Company since May 2010; previously Chief Operating Officer of Minefinders Corporation from May 2008 to May 2010 and VP, Operations for Minefinders from May 2007 to May 2008; prior to May 2007, General Manager for Compania de Minera Zaldivar.

Name and Address	Office or Position Held	Service as a Director ⁽⁴⁾	Principal Occupation during past five years
Richard R. Godfrey British Columbia, Canada	Senior Vice President and Chief Financial Officer	N/A	Chief Financial Officer of the Company since November 2008; previously Chief Financial Officer of Sherwood Copper Corporation from May 2007 to November 2008 and Chief Financial Officer of Northair Group of Companies from May 2007 to January 2009; previously VP Finance of EuroZinc Mining from June 2006 to March 2007 and Chief Financial Officer of Breakwater Resources Ltd. from June 2003 to May 2006.
Jagdish K. Grewal British Columbia, Canada	Senior Vice President, Strategic and Corporate Development	N/A	Senior Vice President, Strategic and Corporate Development of the Company since September 2011; previously Managing Director for Accenture Inc. Vancouver from July 2007 to August 2010; held various positions with BC Hydro including acting CFO from February 2003 to November 2006.
Peter T. Hemstead British Columbia, Canada	Vice President, Marketing and Treasurer	N/A	Vice President, Marketing and Treasurer of Capstone since November 2008; previously Treasurer of Sherwood Copper Corporation from October 2006 to November 2008.
Jason P. Howe British Columbia, Canada	Vice President, Business Development	N/A	Vice President, Business Development for Capstone since March 2009; President & CEO of Zena Mining from 2008 to present; previously Vice President Finance for the Company from November 2008 to March 2009, Chief Financial Officer of Capstone from April 2004 to November 2008.
John J. Kim British Columbia, Canada	Corporate Secretary	N/A	Corporate Secretary of the Company since June 2010; previously, Assistant Corporate Secretary of Silver Standard Resources Inc. from September 2007 to May 2008 and October 2009 to June 2010 and Corporate Secretary from May 2008 to October 2009; previously, Securities Paralegal with MacNeill Law from June 2004 to September 2007.
Brad J. Mercer Alberta, Canada	Vice President, Exploration	N/A	Vice President, Exploration for Capstone since November 2008; previously Vice President of Exploration for Sherwood Copper Corp. from April 2008 to November 2008 and Exploration Manager of Sherwood from July 2005 to March 2008; Director of Northern Tiger Resources Inc. since June 2008 and of Aurion Resources Ltd. since October 2009.
John E. Sagman British Columbia, Canada	Vice President, Technical Services	N/A	Vice President, Technical Services for Capstone since March, 2011; previously, Manager of Projects for Capstone from Feb 2010 to Feb 2011. Prior to Feb 2010, Senior Project Manager for Vale Inco Ltd.

(1) Denotes members of the Audit Committee.

(2) Denotes members of the Human Resources & Corporate Governance Committee.

(3) Denotes members of the Environmental, Health, Safety & Sustainability Committee.

(4) Each director and officer is appointed for a term of one year which expires on the date of the annual meeting of shareholders of the Company following his or her appointment.

Control of Securities

As at March 30, 2012, the directors and executive officers of the Company as a group beneficially owned, directly or indirectly, or exercised control or direction over, an aggregate of 1,425,007 common shares of the Company, representing approximately 0.376% of the issued and outstanding common shares of the

Company. In addition, the director and executive officers of the Company as a group held incentive stock options for the purchase of an aggregate of 9,603,770 common shares in the capital of the Company, which options are exercisable between C\$1.30 and C\$4.48 per common share and expire between March 30, 2012 and March 22, 2020.

Committees of the Board of Directors

The committees of the Board of Directors of the Company and the directors serving on each of the committees are described below:

Audit Committee

The members of the Company's Audit Committee are Dale C. Peniuk (Chair), Lawrence I. Bell and Chantal Gosselin. The Audit Committee oversees the Company's financial reporting obligations, financial system and disclosures. It reviews the quarterly and annual financial statements, management's discussion and analysis and earnings press releases, monitors and assesses the integrity of the Company's internal control systems, meets with the Company's auditors and liaises between the board of directors and the auditors.

Human Resources & Corporate Governance Committee

The members of the Company's Human Resources & Corporate Governance Committee are Lawrence I. Bell (Chair), George L. Brack, and Chantal Gosselin. This committee is responsible for recommending to the board the compensation paid to the Company's executive officers and directors and for recommending to the board stock option grants for directors, officers and employees.

Environmental, Health, Safety & Sustainability Committee

The members of the Company's Environmental, Health, Safety & Sustainability Committee are Chantal Gosselin (Chair), Hak-Kyun Shin and Richard N. Zimmer. This committee's mandate is to develop, implement and monitor the Company's environmental, health, safety and sustainability practices.

10.2 Cease Trade Orders, Bankruptcies, Penalties or Sanctions

To the knowledge of the Company, no director or executive officer of the Company is, as at the date of this Annual Information Form, or was, within 10 years before the date of this Annual Information Form, a director, chief executive officer ("CEO") or chief financial officer ("CFO") of any company (including the Company) that:

- (a) was the subject, while the director or executive officer was acting in the capacity as director, CEO or CFO of such company, of a cease trade or similar order or an order that denied the relevant company access to any exemption under securities legislation, that was in effect for a period of more than 30 consecutive days; or
- (b) was subject to a cease trade or similar order or an order that denied the relevant company access to any exemption under securities legislation, that was in effect for a period of more than 30 consecutive days, that was issued after the director or executive officer ceased to be a director, CEO or CFO but which resulted from an event that occurred while the proposed director was acting in the capacity as director, CEO or CFO of such company.

Other than as set out herein, to the knowledge of the Company, none of the Company's directors or executive officers or any shareholder holding a sufficient number of securities of the Company to affect materially the control of the Company:

- (a) is, as at the date of this Annual Information Form, or has been within 10 years before the date of this Annual Information Form, a director or executive officer of any company (including the Company) that, while that person was acting in that capacity, or within a year of that person ceasing to act in that capacity, became bankrupt, made a proposal under any legislation relating

to bankruptcy or insolvency or was subject to or instituted any proceedings, arrangement or compromise with creditors or had a receiver, receiver manager or trustee appointed to hold its assets;

- (b) has, within the 10 years before the date of this Annual Information Form, become bankrupt, made a proposal under any legislation relating to bankruptcy or insolvency, or become subject to or instituted any proceedings, arrangement or compromise with creditors, or had a receiver, receiver manager or trustee appointed to hold the assets of the director, executive officer or shareholder;
- (c) has been subject to any penalties or sanctions imposed by a court relating to securities legislation or by a securities regulatory authority or has entered into a settlement agreement with a securities regulatory authority; or
- (d) has been subject to any penalties or sanctions imposed by a court or regulatory body that would likely be considered important to a reasonable investor in making an investment decision.

10.3 Conflicts of Interest

Certain of the Company's directors and officers serve or may agree to serve as directors or officers of other reporting companies or have significant shareholdings in other reporting companies and, to the extent that such other companies may participate in ventures in which the Company may participate, the directors of the Company may have a conflict of interest in negotiating and concluding terms respecting the extent of such participation. In the event that such a conflict of interest arises at a meeting of the Company's directors, a director who has such a conflict will abstain from voting for or against the approval of such participation or such terms and such director will not participate in negotiating and concluding terms of any proposed transaction. From time to time, several companies may participate in the acquisition, exploration and development of natural resource properties thereby allowing for their participation in larger programs, permitting involvement in a greater number of programs and reducing financial exposure in respect of any one program. It may also occur that a particular company will assign all or a portion of its interest in a particular program to another of these companies due to the financial position of the company making the assignment. Under the laws of the Province of British Columbia, the directors of the Company are required to act honestly, in good faith and in the best interests of the Company. In determining whether or not the Company will participate in a particular program and the interest therein to be acquired by it, the directors will primarily consider the degree of risk to which the Company may be exposed and its financial position at that time. See also "Describe the Business - Risk Factors".

ITEM 11 - AUDIT COMMITTEE INFORMATION

11.1 Audit Committee Charter

The Company's Audit Committee has a charter (the "Audit Committee Charter") in the form attached to this Annual Information Form as Schedule "A".

11.2 Composition of the Audit Committee

The following are the members of the Audit Committee:

Dale C. Peniuk (Chair)	Independent ⁽¹⁾	Financially literate ⁽¹⁾
Lawrence I. Bell	Independent ⁽¹⁾	Financially literate ⁽¹⁾
Chantal Gosselin	Independent ⁽¹⁾	Financially literate ⁽¹⁾

(1) As defined by National Instrument 52-110 - *Audit Committees* ("NI 52-110").

11.3 Relevant Education and Experience

Dale C. Peniuk

Mr. Peniuk is a chartered accountant that provides financial consulting services to a number of mining companies, and in addition to the Company, currently serves on the Board as Audit Committee Chair of Lundin Mining Corporation, Sprott Resource Lending Corp., Argonaut Gold Inc. and Rainy River Resources Ltd. Mr. Peniuk also served on the Board and as Audit Committee Chair of Corriente Resources Inc., until completion of a takeover bid by CRCC-Tongguan Investment (Canada) Co. Ltd., EuroZinc Mining Corporation, until completion of its merger with Lundin Mining, and Rio Narcea Gold Mines, Ltd., following the acquisition of a controlling interest in the company by Lundin Mining until the takeover of Rio Narcea was completed. Mr. Peniuk also served on the Board as Audit Committee Chair of both Reservoir Capital Corp. and Q2 Gold Resources Inc. until resigning in September 2010. Mr. Peniuk obtained a B.Comm from the University of British Columbia in 1982 and his Chartered Accountant designation from the Institute of Chartered Accountants of British Columbia in 1986, and spent more than 20 years with KPMG LLP, Chartered Accountants and predecessor firms, the last 10 of which as an assurance partner.

Lawrence I. Bell

Mr. Bell served as the non-executive Chairman of British Columbia Hydro and Power Authority until December 2007. From August 2001 to November 2003, Mr. Bell was Chairman and Chief Executive Officer of British Columbia Hydro and Power Authority and, from 1987 to 1991, he was Chairman and Chief Executive Officer of British Columbia Hydro and Power Authority. He is also a director of International Forest Products Limited and Silver Wheaton Corp. and is former Chairman of the University of British Columbia Board of Directors and former Chairman of Canada Line (Rapid Transit) Project. Prior to these positions, Mr. Bell was Chairman and President of the Westar Group and Chief Executive Officer of Vancouver City Savings Credit Union. In the province's public sector, Mr. Bell has served as Deputy Minister of Finance and Secretary to the Treasury Board. He holds a Bachelor of Arts degree and an Honours Ph.D. from the University of British Columbia. He also holds a Masters of Arts degree from San Jose State University.

Chantal Gosselin

Ms. Gosselin is a Vice President at Ned Goodman Investment Counsel. She formerly held the position of senior mining analyst, at Sun Valley Gold LLP, a precious metals focused investment fund. From May 2006 to March 2008, Ms. Gosselin was a senior mining analyst and partner of Genuity Capital Markets. Prior to joining Genuity, she held positions as a mining analyst with Haywood Securities Inc. and Dundee Securities Corporation. Between 1992 and 2000, she held various management positions for Blackhawk Mining Inc., Pan American Silver Corporation, Dynatec Mining Corporation and Aur Resources Inc. She holds a MBA in business administration from Concordia University and a BSc. in mining engineering from Laval University.

Audit Committee Oversight

At no time since the commencement of the Company's most recently completed financial year was a recommendation of the Committee to nominate or compensate an external auditor not adopted by the Board of Directors.

11.2 Reliance on Certain Exemptions

At no time since the commencement of the Company's most recently completed financial year has the Company relied on an exemption in Section 2.4 of NI 52-110 (De Minimis Non-audit Services), Section 3.2 of NI 52-110 (Initial Public Offerings), Section 3.3(2) of NI 52-110 (Controlled Companies), Section 3.4 of NI 52-110 (Events Outside Control of Member), Section 3.5 of NI 52-110 (Death, Disability or Resignation of Audit Committee Member) or Section 3.6 of NI 52-110 (Temporary Exemption for Limited and Exceptional Circumstances), on an exemption from NI 52-110, in whole or in part, granted under Part 8 of NI 52-110 (Exemptions) or on Section 3.8 of NI 52-110 (Acquisition of Financial Literacy).

11.3 Pre-Approval Policies and Procedures

The Audit Committee pre-approves all non-audit services to be provided by the Company's external auditor and has established policies and procedures accordingly.

11.4 External Auditors Service Fees (By Category)

The aggregate fees billed by the Company's external auditors in the last two fiscal years ended December 31, 2011 and 2010 are as follows:

Financial Year Ending	Audit Fees	Audit Related Fees	Tax Fees	All Other Fees
December 31, 2011	C\$482,000	C\$57,000	C\$30,000	Nil
December 31, 2010	C\$537,000	-	C\$44,000	Nil

ITEM 12 - LEGAL PROCEEDINGS AND REGULATORY ACTIONS

Legal Proceedings

The Company is not subject to any legal proceedings as of December 31, 2011, and was not subject to any proceedings throughout the recently completed financial year.

A number of individual labour lawsuits were filed in November 2010 against Capstone Gold S.A. de C.V. These suits were settled out of court through mediation with the Mexican Labour Authorities during December 2010 and during the first quarter of 2011.

The directors and the management know of no active or pending proceedings against anyone that might materially adversely affect an interest of the Company, save for:

MintoEx filed a complaint in US District Court, District of Alaska, on March 4, 2011 stating that the dockage rate charged vessels transporting its copper concentrate by the dock owner Pacific and Arctic Railway and Navigation Company ("PARN") in Skagway, Alaska was in violation of Alaska law as a discriminatory rate. In addition, MintoEx filed a complaint with the United States Federal Maritime Commission on November 18, 2011 stating that the dockage rate charged vessels transporting its copper concentrate by PARN in Skagway, Alaska was in violation of United States law and Alaska law as a discriminatory rate.

Regulatory Actions

As of December 31, 2011, the Company is not subject to:

- (a) any penalties or sanctions imposed against the Company by a court relating to securities legislation or by a securities regulatory authority during the financial year ended December 31, 2011; or
- (b) any other penalties or sanctions imposed by a court or regulatory body against the Company that would likely be considered important to a reasonable investor in making an investment decision; or
- (c) settlement agreements the Company entered into before a court relating to securities legislation or with a securities regulatory authority during the financial year ended December 31, 2011.

ITEM 13 - INTEREST OF MANAGEMENT AND OTHERS IN MATERIAL TRANSACTIONS

Except as otherwise disclosed herein, no director, executive officer or principal shareholder of the Company, or any associate or affiliate of the foregoing, have had any material interest, direct or indirect, in any transaction within the three most recently completed financial years or during the current financial year prior to the date of this Annual Information Form that has materially affected or will materially affect the Company.

ITEM 14 - TRANSFER AGENT AND REGISTRAR

The Company's transfer agent and registrar is Computershare Investor Services Inc., 3rd Floor, 510 Burrard Street, Vancouver, British Columbia V6C 3B9. The Company has appointed Computershare Investor Services Inc., 11th Floor, 100 University Avenue, Toronto, Ontario M5J 2Y1 as its co-transfer agent and registrar.

ITEM 15 - MATERIAL CONTRACTS

Contracts of the Company, other than contracts entered into in the ordinary course of business, that are material to the Company and that were entered into by the Company between January 1, 2011 and December 31, 2011 are listed below:

Shareholders' Agreement between the Company, KORES, Korea Chile Mining Corporation and 0908113 BC Ltd. dated June 17, 2011 with respect to the ownership of the Santo Domingo Project.

ITEM 16 - EXPERTS

Deloitte & Touche LLP, Chartered Accountants, have prepared an auditor's report dated March 13, 2012, on the Company's annual comparative financial statements to December 31, 2011 which have been filed on SEDAR. Deloitte & Touche LLP have confirmed they are independent with respect to the Company within the meaning of the rules of professional conduct of the Institute of Chartered Accountants of British Columbia.

16.1 Names of Experts

The following is a list of the persons or companies named as having prepared or certified a statement, report or valuation in this Annual Information Form, either directly or in a document incorporated by reference, and whose profession or business gives authority to the statement, report or valuation made by the person or company: Jeffrey L. Woods, CP, Jenna Hardy, P.Geo., Robert C. Sim, P.Geo., Gordon Doerksen, P.Eng., Wayne Barnett, PhD, Pr.Sci.Nat, Michael Levy, PE, Dino Pilotto, P.Eng., David Brimage, MAusIMM, Iouri Iakovlev, P.Eng., Marek Nowak, P.Eng., Scott Carlisle, P.Eng., Cameron C. Scott, P.Eng., Garth Kirkham, P.Geo., Michael Makarenko, P.Eng., Ali Sheykholeslami, P.Eng., Hoe Teh, P.Eng., Guangwen (Gordon) Zhang, P.Eng., Carlos Shaparro, P.Eng., Daniel Jarratt, P.Eng., David Archibald, R.P.Bio (BC), Frank Palkovits, P.Eng., Brad Mercer, P.Geo., Robert B. Barnes, P.Eng., John Sagman, P.Eng., David W. Rennie, P.Eng., John Nilsson, P.Eng., Art Winkers, P.Eng., Michael Davies, P.Eng., John Eggert, P.Eng., Bill Hodgson, P.Eng., George Darling P.Eng., Lane Maxemiuk, P.Eng. and Ali Shahkar, P. Eng.

16.2 Interests of Experts

Except as otherwise disclosed below, none of the experts named under "Names of Experts", when or after they prepared the statement, report or valuation, has received any registered or beneficial interests, direct or indirect, in any securities or other property of the Company or of one of the Company's associates or affiliates (based on information provided to the Company by the experts) or is or is expected to be elected, appointed or employed as a director, officer or employee of the Company or of any associate or affiliate of the Company.

Brad J. Mercer, P.Geo., is the Vice President, Exploration of the Company and, as of the date hereof, held 56,039 common shares of the Company and 454,160 stock options exercisable into common shares of the Company.

John E. Sagman, P.Eng., is the Vice President, Technical Services for the Company and, as of the date hereof, held 10,000 common shares of the Company and 358,000 stock options exercisable into common shares of the Company.

Robert B. Barnes, P.Eng., is the former Vice President, Operations of the Company and, as of the date

hereof held 610,000 stock options exercisable into common shares of the Company.

ITEM 17 - ADDITIONAL INFORMATION

Additional information relating to the Company may be found on SEDAR at www.sedar.com.

Additional information, including directors' and officers' remuneration and indebtedness, principal holders of the Company's securities, and securities authorized for issuance under equity compensation plans, where applicable, is contained in the Company's Information Circular for its most recent annual general meeting of security holders that involved the election of directors. Additional financial information is provided in the Company's consolidated financial statements and management's discussion and analysis for the year ended December 31, 2011.

SCHEDULE "A"

CAPSTONE MINING CORP. (the "Company")

AUDIT COMMITTEE CHARTER

1. Each member of the Audit Committee (the "Committee") shall be a member of the Board of Directors, in good standing, and all of the members of the Committee shall be independent in order to serve on the Committee.
2. All members of the Committee shall be financially literate.
3. Review the Committee's charter annually, reassess the adequacy of this charter, and recommend any proposed changes to the Board of Directors. Consider changes that are necessary as a result of new laws or regulations.
4. The Committee shall meet at least four times per year, and each time the Company proposes to issue a press release with its quarterly or annual earnings information. These meetings may be combined with regularly scheduled meetings, or more frequently as circumstances may require. The Committee may ask members of the Management or others to attend the meetings and provide pertinent information as necessary.
5. Conduct executive sessions with the external auditors, outside counsel, and anyone else as desired by the Committee.
6. The Committee shall be authorized to hire outside counsel or other consultants as necessary (this may take place any time during the year).
7. Approve all services provided by the external auditors, including tax and other non-audit services. Review and evaluate the performance of the external auditors and review with the full Board of Directors any proposed discharge of the external auditors.
8. Review with the Management the policies and procedures with respect to officers' expense accounts and perquisites, including their use of corporate assets, and consider the results of any review of these areas by the external auditors.
9. Receive a report annually from Management of all accounting firms employed, other than the principal external auditors, with such report to include the nature of the services performed and the fees charged.
10. Inquire of the Management and the external auditors about significant risks or exposures facing the Company; assess the steps the Management has taken or proposes to take to minimize such risks to the Company; and periodically review compliance with such steps.
11. Review with the external auditors, the audit scope and plan of the external auditors. Address the coordination of the audit efforts to assure the completeness of coverage, reduction of redundant efforts, and the effective use of audit resources.
12. Inquire regarding the "quality of earnings" of the Company from a subjective as well as an objective standpoint.
13. Review with the external auditors: (a) the adequacy of the Company's internal control over financial reporting including computerized information systems controls and security; and (b) any related significant findings and recommendations of the external auditors together with the Management's responses thereto.

14. Review with the Management and the external auditors the effect of any regulatory and accounting initiatives, as well as off-balance-sheet structures, if any.
15. Review with the Management, the external auditors, the interim and annual financial report before it is filed with the regulatory authorities.
16. Review with the external auditors that perform an audit: (a) all critical accounting policies and practices used by the Company; and (b) all alternative treatments of financial information within generally accepted accounting principles that have been discussed with the Management of the Company, the ramifications of each alternative and the treatment preferred by the Company.
17. Review all material written communications between the external auditors and the Management.
18. Review with the Management and the external auditors: (a) the Company's annual financial statements and related footnotes; (b) the external auditors' audit of the financial statements and their report thereon; (c) the external auditors' judgments about the quality, not just the acceptability, of the Company's accounting principles as applied in its financial reporting; (d) any significant changes required in the external auditors' audit plan; and (e) any serious difficulties or disputes with the Management encountered during the audit.
19. Periodically review the Company's code of conduct to ensure that it is adequate and up-to-date.
20. Review the procedures for the receipt, retention, and treatment of complaints received by the Company regarding accounting, internal accounting controls, or auditing matters that may be submitted by any party internal or external to the organization. Review any complaints that might have been received, current status, and resolution if one has been reached.
21. Review procedures for the confidential, anonymous submission by employees of the organization of concerns regarding questionable accounting or auditing matters. Review any submissions that have been received, the current status, and resolution if one has been reached.
22. Review and approve hiring policies for employees or former employees of the past and present external auditors.
23. Receive a report annually from the external auditors confirming their independence and actively engage in a dialogue with the external auditors as to any disclosed relationships or services that may impact their independence. Ensure the external auditors are not engaged to provide non-audit services for which the applicable securities legislation prohibits them from providing.
24. The Committee will perform such other functions as assigned by law, the Company's articles, or the Board of Directors.